

WEVER & DUCRÉ
LIGHTING

“There’s no beauty without great lighting. Beauty is never loud. It hides in details, in shape, in moments, in light. Great lighting allows us to see what was always there and to transform it into something beautiful.”

ANTWERP-BASED PHOTOGRAPHER FREDERIK VERCRUYSSE

story telling

weverducre.com/coverstory26

Indoor

CEILING RECESSED 54 – 173

QITO trimless 57 | QITO 59 | MATCH POINT trimless 61 | MATCH POINT 61 | BLIEK PETIT trimless 63 | BLIEK PETIT 63 | BLIEK 67 | LINOO trimless 71

LINOO 71 | PIRRO PETIT 75 | PIRRO 77 | PLANO PETIT 83 | PLANO 85 | STRANGE PETIT trimless 87 | STRANGE trimless 89 | SNEAK trimless 91 | SNEAK 93

DEEP POINT 97 | DEEP BIJOU 99 | DEEP PETIT IQ 101 | DEEP PETIT 103 | DEEP IQ 105 | DEEP 107 | DEEPER 109 | DEEP ADJUST PETIT IQ 111 | DEEP ADJUST PETIT trimless 113

DEEP ADJUST PETIT 113 | DEEP ADJUST IQ 115 | DEEP ADJUST trimless 117 | DEEP ADJUST 119 | RONY POINT 123 | RONY PETIT 125 | RONY ADJUST PETIT 127 | RONY ADJUST 129 | CENO 131

LECA 135 | MATCH 137 | MATCH SNEAK trimless 143 | MATCH SNEAK 143 | MATCH STICK trimless 145 | MATCH STICK 145 | RUVI 147 | PLANO IP44 151 | MATCH POINT IP44 153

DEEP POINT IP44 155 | DEEP BIJOU IP65 157 | DEEP PETIT IP65 159 | DEEP IP44 | IP65 161 | DEEPER IP44 163 | TAIO IP65 165 | RINI SNEAK IP44 167 | PERLEZ IP44 169 | MIRBI 1.0 IP44 171

CEILING SURFACE 174 – 307

MIRBI 2.0 IP44 171 | CITY IP44 173 | QITO 177 | BLIEK PETIT 179 | CENO 181 | LECA 189 | MATCH 193 | MICK 199

PILLO 201 | SARA 203 | SQUBE 205 | LINOO 211 | PIRRO PETIT 213 | PIRRO 215 | PIRRO OPAL 221 | PIRRO ON BASE 223 | PLANO PETIT 227

SIRRO 229 | BOX MINI 231 | BOX 235 | DOCUS MINI 239 | DOCUS 241 | HEXO MINI 243 | HEXO 245 | RAY MINI 247 | RAY 251

SOLID BIJOU 253 | SOLID PETIT 255 | SOLID 257 | TRACE 261 | FINLIN 263 | FIL SPIN 267 | TRACE SPIN 269 | PERLEZ SPIN 271 | TRACE GRID 273

PERLEZ GRID 275 | VENN 277 | DRO 279 | MIRRO 283 | CLEA 287 | J.J.W. 289 | WIRO 291 | ROOMOR 293 | PERLEZ IP44 295

MIRBI 1.0 IP44 297 | MIRBI 2.0 IP44 297 | TAIO IP65 299 | ROB IP44 301 | ROBY IP44 303 | TOWNA IP44 305 | ROSS IP54 307

STREX 48V-TRACK 312 – 359

TRACKS 313

CENO 321 | LECA 325 | DOMY 327 | MATCH 329 | TRACE MINI 331 | MICK 333 | BOX 335 | DOCUS 337 | HEXO 339

RAY 341 | DOT MODULE 343 | OPAL MODULE 343 | COZY CONE 345 | MATCH 347 | TRACE 351 | ODREY 353 | OPLIA 357 | SOLLI 359

Indoor

Indoor

1-PHASE TRACK 360 – 383

TRACKS 361 · PILLO 363 · SARA 365 · SQUBE 369 · PIRRO 371 · DRO 373 · HEXO MINI 375 · HEXO 377

RAY MINI 375 · RAY 377 · ODREY 379 · RUVI 383

3-PHASE TRACK 384 – 395

TRACKS 385 · LIKO 387 · SQUBE 389 · HEXO MINI 391 · HEXO 393 · RAY MINI 391 · RAY 393 · ROOMOR 395

SYSTEM 396 – 411

QUBBY 397 · FLYRA 401 · ELLO 405 · ILANE 409

CEILING SUSPENDED 412 – 565

MATCH LUSTA 415 · TRACE 417 · NET 421 · FINELLE 423 · FLYRA 427 · FINLIN 433 · STUDO 437 · FIL 441

DARF 445 · SHEDDA 449 · KUJO 453 · OPLIA 457 · QUBBY 459 · GIGANT 461 · CONE 463 · DRO 465 · MIRRO 467

J.J.W. 479 · WIRO 489 · ROOMOR 495 · ROOMOR 499 · COZY CONE 503 · HEXO MINI 505 | 531 · HEXO 533 · RAY MINI 507 | 535 · RAY 537

Indoor

MATCH 509 · TRACE 511 | 547 · ODREY 517 | 539 · OPLIA 521 · SOLLI 523 · WETRO 549 · CLEA 557 · SHIEK 561 · DINOR 563

WALL RECESSED 566 – 581

LECA SNOOZE 569 · MATCH SNOOZE 571 · RETO 573 · LITO 1.0 575 · LITO 2.0 575 · STRIPE SLIM 577 · STRIPE 579 · ORIS 581

WALL SURFACE 582 – 711

CENO 585 · MATCH 589 · TRACE MINI 591 · TRACE 593 · TRACE SLIM 595 · ODREY 599 · BOX MINI 605 · BOX 607

DOCUS MINI 609 · HEXO MINI 611 · RAY MINI 613 · RAY 615 · CENTRAL 617 · LEENS 619 · BENTO 621 · DRO 623 · MIRRO 625

CLEA 631 · J.J.W. 633 · ROOMOR 639 · DARF 643 · CG SQUARE 647 · DOT 649 · TAPIS 651 · MILES ROUND 663 · MILES CARRÉ 667

MILES 669 · LARRA 671 · FINLIN 673 · FINLIN ROUND 679 · FIL SPIN 681 · VENN 683 · MATCH SNOOZE 685 · MICK SNOOZE 687 · SARA SNOOZE 689

MICK WALL 691 · DOMINO 693 · SCAVA 695 · HAJO IP44 697 · PERLEZ IP44 701 · MIRBA IP44 705 · MIRBI IP44 707 · RIBELLE IP65 709 · PAVIO IP65 711

Indoor

TABLE
712 – 725

DRO
715


DRO
717


CG01
719


MIRRO
721


MATCH
723


ROOMOR
725

FLOOR
726 – 735


DRO
715

FINLIN
727

MATCH
729


DRO
731


MIRRO
733


ROOMOR
735

SOFT ACOUSTICS


MIRRO SOFT
285


MIRRO SOFT
471


SPIRRA SOFT
475


WAVE SOFT
477


SOLLI COCOON
525


MIRRO SOFT
629


TAPIS SOFT
657

Outdoor

CEILING RECESSED
738 – 749


DEEP BIJOU
741


DEEP PETIT
743


DEEP
745


TAIO
747


INTRA
749

CEILING SURFACE
750 – 775


TRAM
753


TUBE
755


TAIO
757


RAY
759


TRAIN
761


TUBE CARRÉ
763


BOX
765


BLAS
767


ROB
769


ROSS
771


TRADORA
775

CEILING SUSPENDED
776 – 777


TRADORA
777

WALL RECESSED
778 – 787


RETO
781


ORIS
785

WALL SURFACE
788 – 835


CLASCO
791


KIOSK
793

TRAM
797

TUBE
799

TAIO
803

RAY
805

TRAIN
807

CENTRAL
809

TUBE CARRÉ
811

BOX
815

TAPE
817

PALOS
819

SWAM
821

TRADORA
823

RIBELLE
825

BLAS
827

X-BEAM
829

X-BEAM ROUND
829

PAVIO
831

RETO ROUND
833

RETO
835

FLOOR RECESSED
836 – 853

BLINK trimless
839

BLINK
839

CARD
843

MAP
845

MAP ASYM
849

CHART
851

CHART ASYM
853

FLOOR SURFACE
854 – 891

KIOSK
857

SWAM
859

STIPO
863

X-BEAM
865

RIBELLE
867

GATE ROUND
869

GATE CARRÉ
871

PALOS ROUND
873

PALOS CARRÉ
877

LINUS
881

GEO
885

REED
887

POLA
889


We all know it: that glance at the ceiling and the thought, “Everyone has this light.” That’s why we create lighting solutions that are truly unique – inspired by people like you who value design and quality. Because life’s too short for boring lighting.

Wir alle kennen ihn: den Blick an die Decke und den Gedanken „Diese Leuchte hat wirklich jeder“. Deshalb schaffen wir Lichtlösungen, die einzigartig sind – inspiriert von Menschen wie Ihnen, die Design und Qualität lieben. Denn für langweilige Leuchten ist das Leben zu kurz.

weverducre.com/about

our world



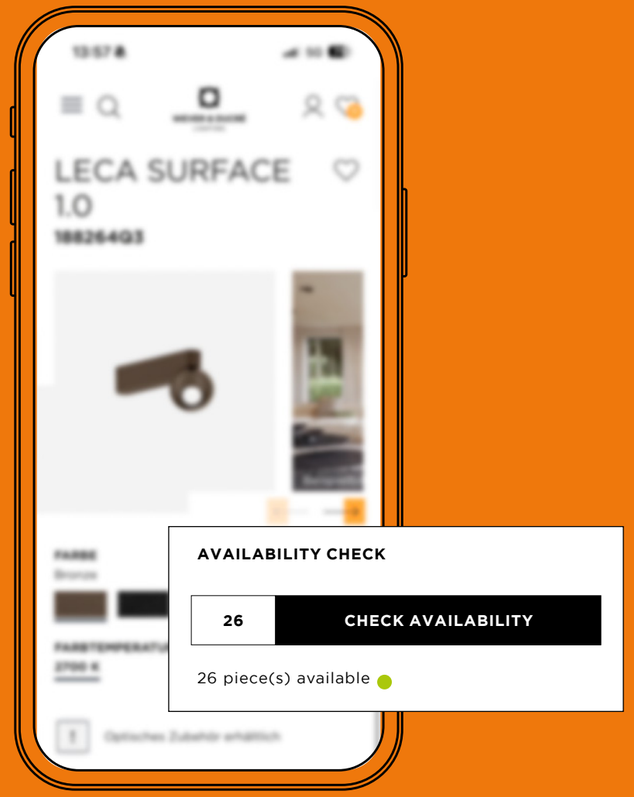

availability

READY FOR AN ONLINE DATE

That’s how it is with our lights: once you’ve fallen in love, you want them right away. Good news: we ship all products within 48 hours! Check the availability of your favourite online.

So ist das mit unseren Leuchten: Einmal verliebt, will man sie sofort haben. Gute Nachricht: Wir versenden alle Produkte innerhalb von 48 Stunden! Prüfen Sie online die Verfügbarkeit Ihres Favoriten.

weverducre.com/products

with

FROM BELGIUM WITH LOVE

In Belgium, it’s not just the scent of fresh waffles and chocolate that fills the air – it’s also the love for great design. Here, creative minds meet a long design tradition, blending craftsmanship with modern aesthetics – creating light that tells stories and makes spaces shine.

In Belgien liegt nicht nur der Duft von frischen Waffeln und Schokolade in der Luft – auch die Liebe zu gutem Design. Hier treffen kreative Köpfe auf eine lange Designtradition, verbinden Handwerkskunst mit moderner Ästhetik – und schaffen Licht, das Geschichten erzählt und Räume strahlen lässt.

weverducre.com/about



13&9 DESIGN



design



CHRISTOPHE GEVERS



JULES WABBES

that

OUR SIGNATURE PIECES

For over 40 years, Wever & Ducré has shaped light as an expression of design. Rooted in Belgian heritage, the brand collaborates with products from Christophe Gevers, Serge Cornelissen, and Jules Wabbes, as well as international designers like 13&9 Design – creating timeless elegance and inspiring light art.

Seit über 40 Jahren gestaltet Wever & Ducré Licht als Ausdruck von Design. Verwurzelt im belgischen Erbe arbeitet die Marke mit Produkten von Christophe Gevers, Serge Cornelissen und Jules Wabbes sowie internationalen Designern wie 13&9 Design – für zeitlose Eleganz und inspirierende Lichtkunst.




S + R CORNELISSEN

lasts

weverducre.com/iconicproducts

CHRISTOPHE GEVERS

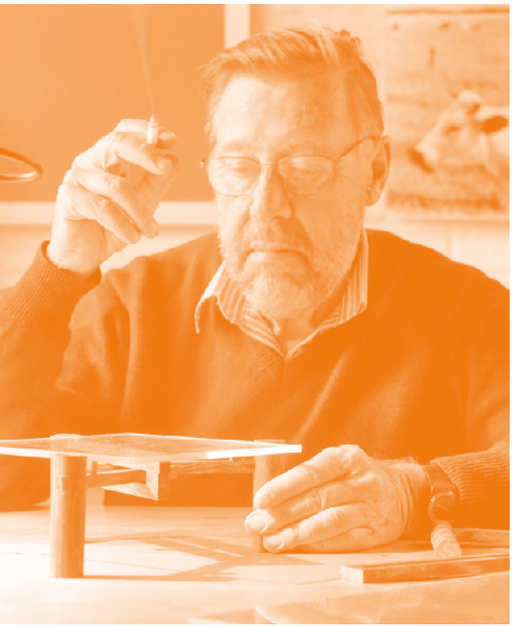

Christophe Gevers (1928–2007) was an important Belgian interior architect and designer, known for his distinctive restaurant concepts. His blend of craftsmanship and aesthetics shaped his work, making his creations both unique and versatile.

Christophe Gevers (1928–2007) war ein bedeutender belgischer Innenarchitekt und Designer, bekannt für seine charakteristischen Restaurantkonzepte. Seine Verbindung von Handwerkskunst und Ästhetik prägt sein Werk, das sein Schaffen einzigartig und vielseitig zugleich machte.

gevers

weverducre.com/gevers





13&9 DESIGN

13&9 design

13&9 Design – the creative duo of Anastasija and Martin Lesjak – has stood for visionary Austrian design since 2013. For Wever & Ducré, they created highlights such as MIRRO, DRO, and SHEDDA fractal. Their style: fractal patterns, modular acoustic, lighting systems, and sculptural forms that place human well-being and atmospheric spaces in the center.

13&9 Design – das kreative Duo Anastasija und Martin Lesjak – steht seit 2013 für visionäres Design aus Österreich. Für Wever & Ducré entstanden Highlights wie MIRRO, DRO und SHEDDA fractal. Ihr Stil: fraktale Muster, modulare Akustik – Licht Systeme und skulpturale Formen, die das Wohlbefinden der Menschen und die atmosphärischen Räume im Mittelpunkt haben.



weverducre.com/13and9design

jules wabbes



J.J.W.

Jules J. Wabbes has been a classic of Wever & Ducré for many years. The gracefully curved lines testify to sophisticated aesthetics. We consider this to be tradition in the best sense and are continuing the product line with ceiling and wall lights.

Jules J. Wabbes ist seit Jahren ein Klassiker von Wever & Ducré. Die grazil gebogenen Linien zeugen von anspruchsvoller Ästhetik. Wir halten das für Tradition im besten Sinne und setzen die Produktlinie mit Decken- und Wandleuchten fort.

weverducre.com/jjw



serge & robert

S+R CORNELISSEN

Serge Cornelissen had more than 20 years of experience in designing lighting solutions for architecture. With his architectural background, he combined aesthetics, technology, and functionality into award-winning concepts – for example for Wever & Ducré with MICK, VENN, HAJO, and QUBBY.

Serge Cornelissen verfügte über mehr als 20 Jahre Erfahrung im Design von Lichtlösungen für Architektur. Mit seinem architektonischen Hintergrund vereinte er Ästhetik, Technologie und Funktion zu preisgekrönten Konzepten – etwa für Wever & Ducré mit MICK, VENN, HAJO und QUBBY.



weverducre.com/cornelissen

ALL AROUND THE WORLD

Wever & Ducré luminaires feel at home all over the world – from London rooftop bars to Berlin city apartments. Their secret? Exceptional design and premium materials. And the best part: we deliver all our products plastic-free. Where can you find us? Almost everywhere. Discover our locations online and easily book your next showroom visit.

Wever & Ducré-Leuchten sind weltweit zuhause – von der London-Rooftop-Bar bis zum Berlin-City-Apartment. Ihr Erfolgsgeheimnis: außergewöhnliches Design und hochwertige Materialien. Und das Beste: Wir liefern alle Produkte plastikfrei. Wo kann man uns finden? Fast überall. Einfach online entdecken und direkt einen Termin im nächsten Showroom vereinbaren.



KORTRIJK



PARIS

world

weverducre.com/locations



FRANKFURT

lifetime



SUSTAINABILITY BY FUNCTION

Our goal: luminaires that shine for years. Thanks to Ecodesign quality, durable spare parts, and LED engines with 20-year replaceability. Need to change the LED module? It’s easy with tool-free exchange units. Plus: a 5-year guarantee* – fair, right?

Unser Ziel: Leuchten, die auch nach Jahren noch strahlen. Dank Qualität nach Ökodesign-Richtlinie, langlebigen Ersatzteilen und LED-Engines mit 20-Jahre-Austauschbarkeit. LED-Modul tauschen? Mit werkzeugfreien Wechselmodulen ganz einfach. Plus: 5 Jahre Garantie* – fair, oder?

*The applicable guarantee conditions are available at weverducre.com.
*Die geltenden Garantiebedingungen sind auf weverducre.com einsehbar.

weverducre.com/sustainability

HOW SOFT CAN IT GET?

Our world is loud – which makes calming spaces all the more important. The Wever & Ducré Soft Collection offers atmospheric lighting combined with design and ambience. The material? Felt made from recycled PET bottles. Sounds good, right?

Unsere Welt ist laut – umso wichtiger sind Orte, die Ruhe ausstrahlen. Die Wever & Ducré-Soft-Kollektion bietet stimmungsvolles Licht kombiniert mit Design & Atmosphäre. Das Material? Filz aus recycelten PET-Flaschen. Klingt gut, oder?

weverducre.com/soft-acoustics



soft acoustics



3D PRINTED
by IQ LUX

layer by

layer



PRINTED IN 3D

Since 2023, we have been experimenting together with IQ LUX using sustainable materials to develop luminaires with minimal environmental impact. This vision is now part of our product portfolio with the new IQ-series of the DEEP Family. A resource-efficiently produced body equipped with highly efficient LED modules.

Seit 2023 experimentieren wir gemeinsam mit IQ LUX an nachhaltigen Materialien, um Leuchten mit minimaler Umweltbelastung zu entwickeln. Jetzt wird diese Vision Teil unseres Produktportfolios – mit der neuen IQ-Serie der DEEP Family. Ressourcenschonend produzierte Leuchten ausgestatted mit hocheffizienten LED-Modulen.

weverducre.com/iqlux

THE FUTURE SHINES BRIGHT


Our luminaires stick in your mind – not only because of their design, but also thanks to smart technology. New in our range: a selection of luminaires with integrated Loxone Tree technology that can be easily connected to Loxone building automation. This makes both small and large projects easy to realise.

Unsere Leuchten bleiben im Kopf – nicht nur wegen ihres Designs, sondern auch dank smarter Technik. Neu dabei: unsere Auswahl an Leuchten mit integrierter Loxone-Tree-Technologie, die sich ganz einfach mit der Gebäudeautomatisierung von Loxone verbinden. So lassen sich kleine wie große Projekte ganz einfach umsetzen.

ALL LOXONE LUMINAIRES ONLINE

weverducre.com/loxone

loxone

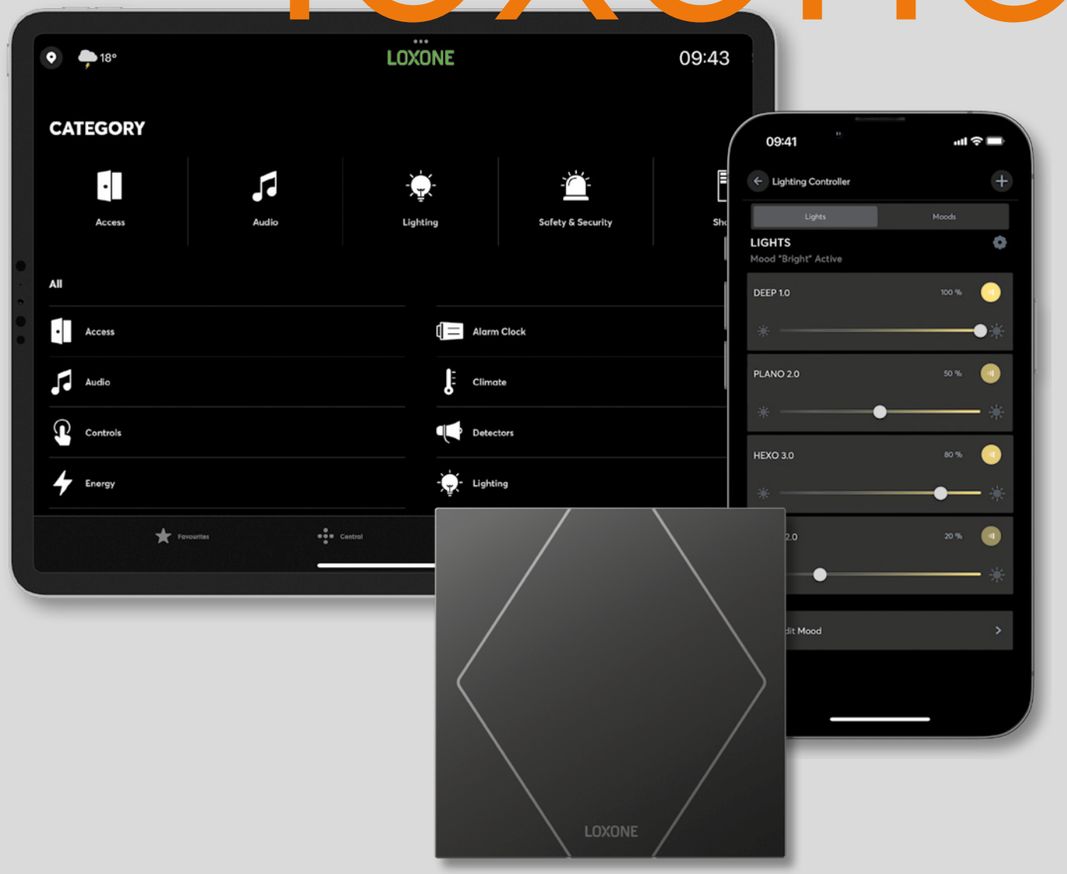

works with Loxone

READY TO TUNE UP YOUR PROJECT?

Exciting lighting systems not affordable anyway? Nonsense! With Wever & Ducré you know better and can show everyone how easy it is to create the perfect atmosphere with the right light in your heart project.

Spannende Beleuchtungssysteme nicht erschwinglich? Nonsense! Mit Wever & Ducré wissen Sie es besser und zeigen allen, wie einfach es ist, mit dem richtigen Licht die perfekte Atmosphäre in Ihrem Herzensprojekt.



LEEUWARDEN | THE NETHERLANDS



HASSELT | BELGIUM

tune up



COLOGNE | GERMANY

weverducre.com/tune-up





HERO OF THE YEAR 2025

projects



weverducre.com/picture-gallery

to fall in *love*

light guide




THE KEY TO A BRIGHTER HOME

How we perceive light shapes how we feel in a room. That’s why lighting should always match its purpose – whether for work, play, or relaxation. Already know what you need? Perfect! Then start planning – or discover the basics in our Lightguide.

Wie wir Licht wahrnehmen, beeinflusst, wie wir uns in einem Raum fühlen. Deshalb sollte die Beleuchtung immer zur Funktion passen – ob zum Arbeiten, Spielen oder Entspannen. Sie wissen schon, wofür? Perfekt! Dann starten Sie mit der Planung – oder entdecken Sie Basics in unserem Lightguide.

weverducre.com/basic-lightguide

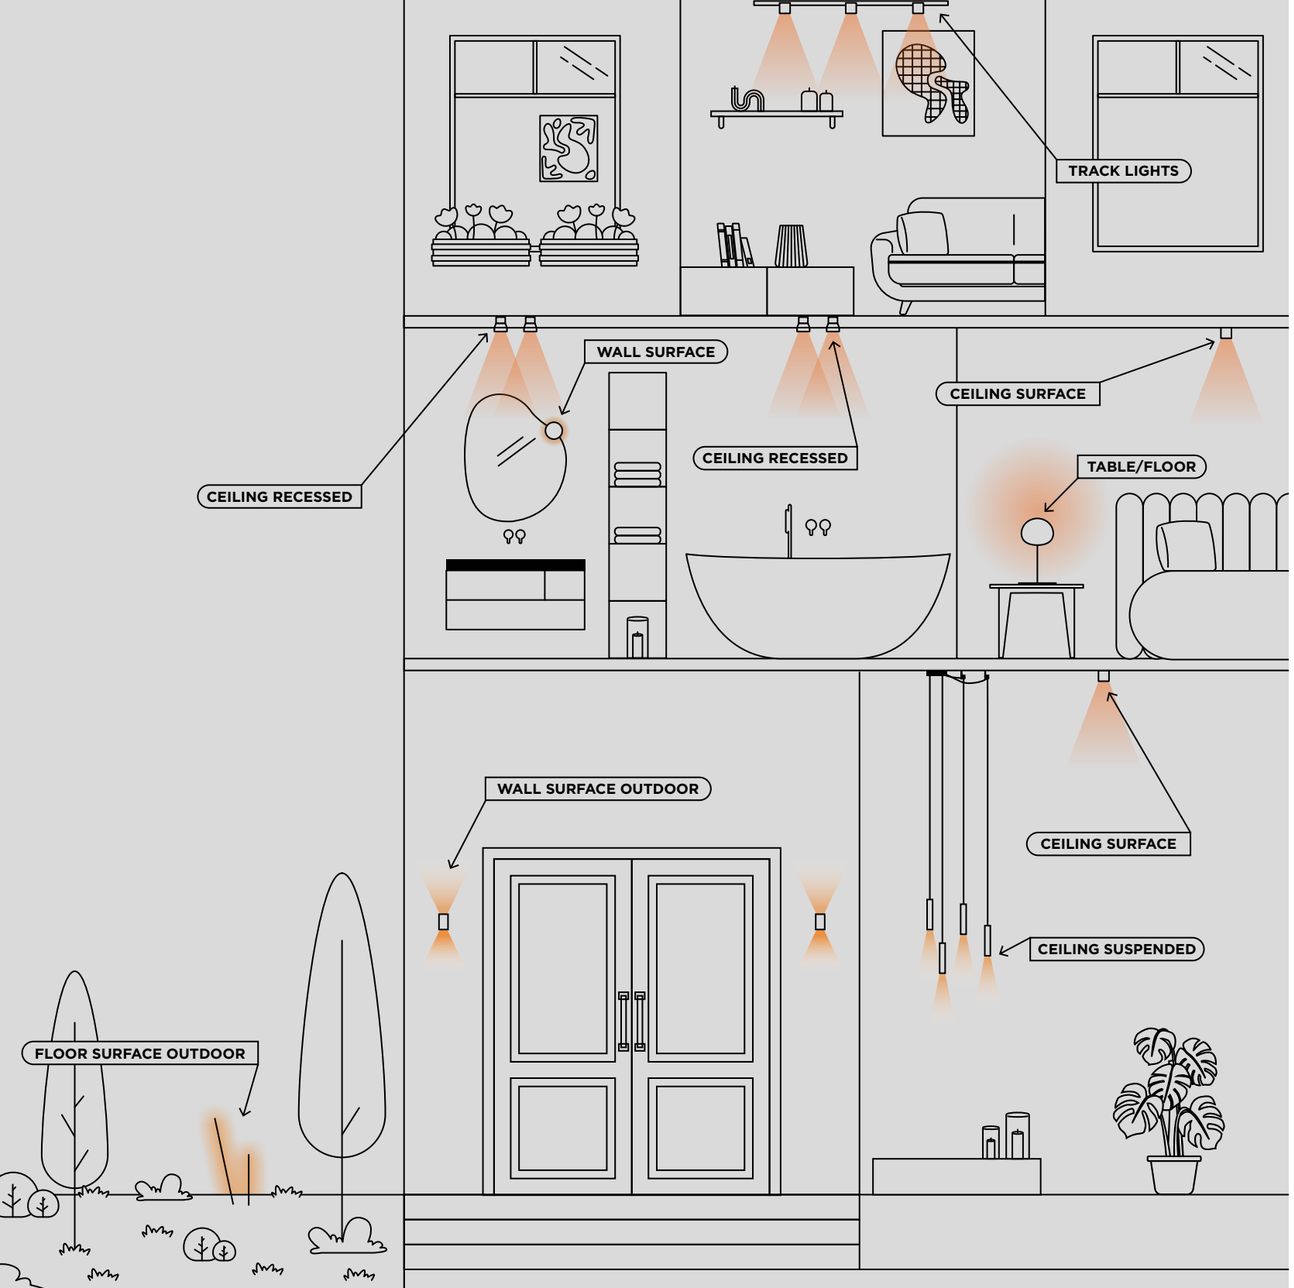

THREE OF US IS A PRODUCT FAMILY

You love a design so much you'd like to have it everywhere? Then look for the mounting icons! If you spot at least three, the luminaire belongs to a family – perfect for creating a consistent look throughout your space. And yes, it works outdoors too – with our outdoor versions.

Sie lieben ein Design so sehr, dass Sie es überall um sich haben möchten? Dann achten Sie auf die Mounting Icons! Wenn Sie dort mindestens drei entdecken, gehört die Leuchte zu einer Familie – perfekt, um Räume im einheitlichen Stil zu gestalten. Auch draußen – mit unseren Outdoor-Varianten.

CEILING RECESSED

CEILING SURFACE

TRACKS

CEILING SUSPENDED

WALL RECESSED

WALL SURFACE

TABLE | FLOOR

CEILING RECESSED

CEILING SURFACE

CEILING SUSPENDED

WALL RECESSED

WALL SURFACE

FLOOR RECESSED

FLOOR SURFACE

Highlight families

CENO



SEMI-RECESSED 131 | SURFACE 181 | ON STREX 321 | WALL 585

MATCH



RECESSED 61 | SEMI-RECESSED 137 | SURFACE 193 | ON STREX 329 | ON STREX | SUSPENDED 347 | 509 | LUSTA 415 | SNOOZE WALL RECESSED 571 | WALL 589



SNOOZE WALL SURFACE 685 | TABLE 723 | FLOOR 729

TRACE




SURFACE 261 | SPIN 269 | GRID 273 | MINI ON STREX 331 | ON STREX | SUSPENDED 351 | 511 | CHANDELIER 417 | WALL 591 | SLIM WALL 595

FINLIN



SURFACE 263 | SUSPENDED 433 | WALL 673 | WALL ROUND 679 | FLOOR 727

ODREY



ON STREX 353 | ON 1-PHASE TRACK 379 | SUSPENDED 517 | WALL 599

LECA



RECESSED 135 | SURFACE 189 | ON STREX 325 | SNOOZE 569

PERLEZ



SEMI-RECESSED 169 | SPIN 271 | GRID 275 | SURFACE 295 | WALL 701 | MIRROR CLIP 703

ROOMOR



OFFICE SURFACE 293 | OFFICE ON TRACK 395 | SUSPENDED 495 | OFFICE SUSPENDED 499 | WALL 639 | TABLE 725 | FLOOR 735

DRO



SURFACE 279 | ON TRACK 373 | SUSPENDED 465 | WALL 623 | TABLE / FLOOR 715 | TABLE 717 | FLOOR 731

MIRRO



SURFACE 283 | CEILING SOFT 285 | SUSPENDED 467 | SUSPENDED SOFT 471 | WALL 625 | WALL SOFT 629 | TABLE 721 | FLOOR 733

J.J.W.



SURFACE 289 | SUSPENDED 479 | SUSPENDED 481 | WALL 633 | WALL 635

CLEA



SURFACE 287 | SUSPENDED 557 | WALL 631

TRADORA



SURFACE 775 | SUSPENDED 777 | WALL 823



I MADE YOU LOOK

Swiveling spots like LECA create stylish accents not only in hotels, but also at home. For larger areas, LECA is available with multiple spots – for uniform lighting. The round spot comes as a recessed, surface-mounted, snooze, or STREX inset luminaire and is available in three colours.

Schwenkbare Spots wie LECA setzen nicht nur in Hotels, sondern auch zu Hause stilvolle Akzente. Für größere Bereiche gibt es LECA mit mehreren Spots – für gleichmäßiges Licht. Der runde Spot ist als Einbau-, Aufbau-, Snooze- oder STREX-Inset-Leuchte in drei Farben erhältlich.

weverducre.com/leca

leca






finlin

FOLLOW THE LINE

At first glance, FINLIN looks like a modern sculpture. But behind its delicate design are slim aluminium tubes that create an elegant look. Whether as a ceiling, pendant, floor, or wall light – FINLIN impresses in black, gold, or elegant champagne.

Auf den ersten Blick wirkt FINLIN wie eine moderne Skulptur. Doch hinter dem filigranen Design stecken feine Aluminiumrohre, die für eine elegante Optik sorgen. Ob als Decken-, Pendel-, Steh- oder Wandleuchte – FINLIN überzeugt in Schwarz, Gold oder edlem Champagner.

weverducre.com/finlin

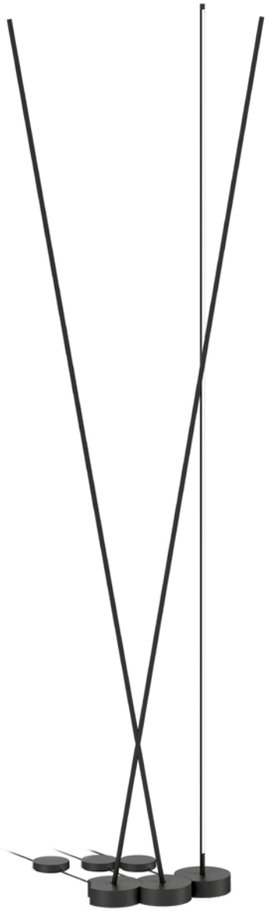

LIGHT A MATCH

Has your interest been sparked yet? It's no wonder – the lights in the MATCH family are slim, like matches, and can therefore be aimed at specific objects with precision. Perfect for highlighting pictures and shelves, providing a brighter view of your favourite thriller, or skilfully staging the bar. All in a clear and uniform design.


Na, schon Feuer gefangen? Kein Wunder. Denn die Leuchten der MATCH-Family sind schlank wie Streichhölzer und lassen sich so ganz gezielt auf Objekte richten. Perfekt, um Bilder und Regale zu highlighten, bessere Sicht auf den Lieblingskrimi zu haben oder die Bar gekonnt in Szene zu setzen. Und das alles in einem klaren und einheitlichen Design.



weverducre.com/match

match



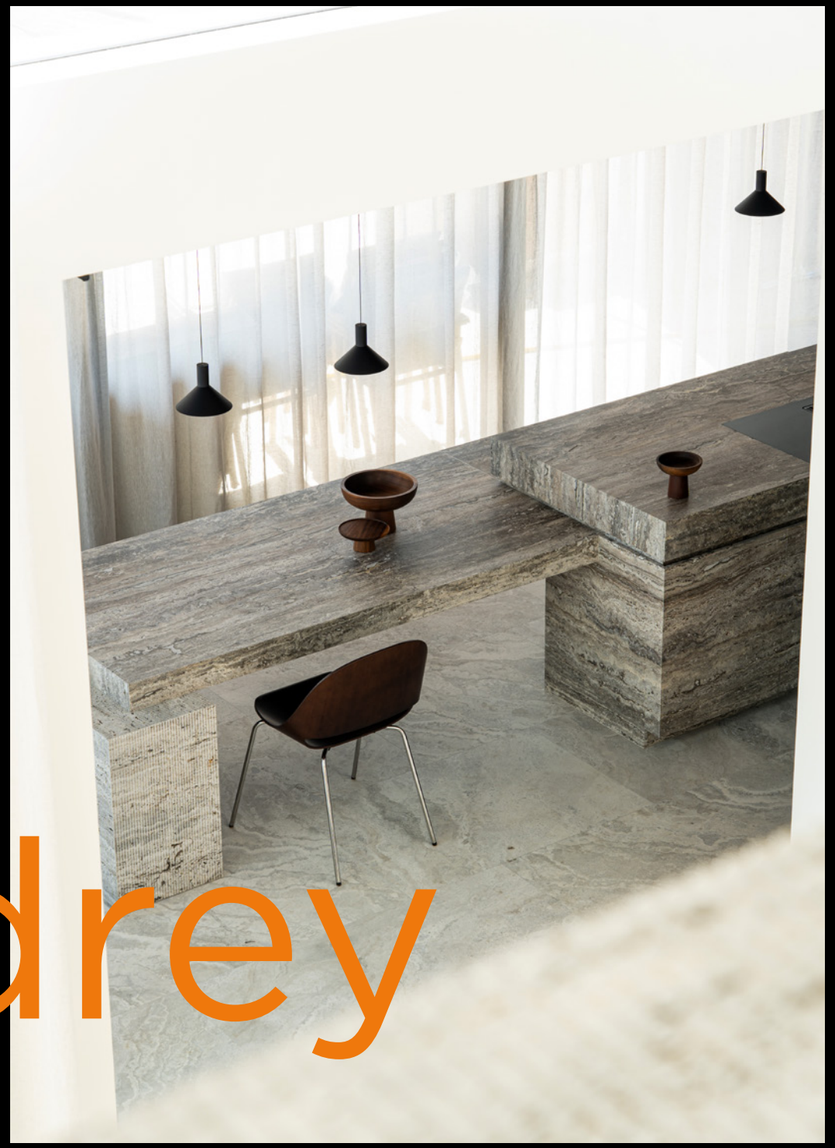

odrey

LITTLE BLACK LAMP

She radiates 1950s charm – and we're not talking about Audrey Hepburn, but our ODREY luminaire. A true must-have for any cocktail party: as versatile as a movie star and stunning in shimmering gold, elegant black, bronze, white, or aluminium.

Sie versprüht den Charme der 50er – und wir reden nicht von Audrey Hepburn, sondern von unserer Leuchte ODREY. Ein echtes Must-have für jede Cocktailparty: wandelbar wie ein Filmstar und in schimmerndem Gold ebenso umwerfend wie in elegantem Schwarz, Bronze, Weiß oder Aluminium.



weverducre.com/odrey

indoor

Ceiling recessed

54 – 173

SPOT LIGHTS



QITO TRIMLESS
57



QITO
59

MATCH POINT TRIMLESS
61

MATCH POINT
61



BLIEK PETIT TRIMLESS
63



BLIEK PETIT
63



BLIEK
67

LINOO TRIMLESS
71



LINOO
71




PIRRO PETIT
75



PIRRO
77



PLANO PETIT
83



PLANO
85



STRANGE PETIT TRIMLESS
87



STRANGE TRIMLESS
89



SNEAK TRIMLESS
91



SNEAK
93



DEEP POINT
97



DEEP BIJOU
99



DEEP PETIT IQ
101



DEEP PETIT
103



DEEP IQ
105



DEEP
107



DEEPER
109



DEEP ADJUST PETIT IQ
111



DEEP ADJUST PETIT TRIMLESS
113



DEEP ADJUST PETIT
113



DEEP ADJUST IQ
115



DEEP ADJUST TRIMLESS
117



DEEP ADJUST
119



RONY POINT
123



RONY PETIT
125



RONY ADJUST PETIT
127



RONY ADJUST
129

SEMI RECESSED



CENO
131



LECA
135



MATCH TRIMLESS
137



MATCH
137



MATCH SNEAK TRIMLESS
143



MATCH SNEAK
143

MATCH STICK TRIMLESS
145

MATCH STICK
145

RUVI
147

IP-RATED

PLANO IP44
151

MATCH POINT IP44
153

DEEP POINT IP44
155

DEEP BIJOU IP65
157

DEEP PETIT IP65
159

DEEP IP65 | IP44
161

DEEPER IP44
163

TAIO IP65
165

RINI SNEAK IP44
167

PERLEZ IP44
169

MIRBI IP44 1.0
171

MIRBI IP44 2.0
171


CITY IP44
173

back



QITO


Ceiling recessed











1.0 TRIMLESS

LED COB 5W | 250mA | 18V
aluminium

IP20 0°-35°|360° M-31° L80|50K

	CODE
	198261W_
	198261L_
	198261M_
	198261Q_
	198261GM_
	198261B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	420	>90	3
3000K	440	>90	5















OPTIONAL

honeycomb louver

	CODE
	915230B0

ALWAYS USE

alu plasterkit 78-80 80 12.5, 15, 20, 25

	CODE
	90017210

quick connect driver | 250mA

	CODE
5W dim	90226201
10W DALI*	90246403

*revision opening required
more options and specs on page 895

back



QITO

Ceiling recessed


























OPTIONAL

honeycomb louver

	CODE
	915230B0



35

ø76

1.0

LED COB 5W | 250mA | 18V
aluminium

IP20 0°-35°|360° M-31° L80|50K

blade springs 68-70 60 2-25

	CODE
	198161W_
	198161L_
	198161M_
	198161Q_
	198161GM_
	198161B_

LIGHT COLOUR	LUMEN|CRI	CODE
2700K	420|>90	3
3000K	440|>90	5

ALWAYS USE

quick connect driver | 250mA

	CODE
5W dim	90226201
10W DALI*	90246403

*revision opening required
more options and specs on page 895

back



PRIVATE RESIDENCE GREECE

DESIGN AWARD 2023 · GOOD DESIGN · reddot winner 2023

MATCH point

Ceiling recessed





ø26



ø35



ø45

1.0 TRIMLESS

LED COB 5W | 250mA | 17V
aluminium

IP20 M-32° L80|50K

45-47 60 4-26

	CODE
	191861B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	315	>90	3
3000K	335	>90	5

1.0

LED COB 5W | 250mA | 17V
aluminium

IP20 M-32° L80|50K

wire springs 28-31 50 4-25

	CODE
	191361W_
	191361B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	315	>90	3
3000K	335	>90	5

1.0 IP44


LED COB 5W | 250mA | 17V
aluminium

IP44 M-32° L80|50K

wire springs 40-41 68 4-25

	CODE
	191261W_
	191261B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	295	>90	3
3000K	325	>90	5



ALWAYS USE

quick connect driver | 250mA

	CODE
5W dim	90226201
10W DALI	90246403

revision opening required
more options and specs on page 895

ALWAYS USE

quick connect driver | 250mA

	CODE
5W dim	90226201
10W DALI	90246403

revision opening required
more options and specs on page 895

ALWAYS USE

quick connect driver | 250mA

	CODE
5W dim | IP20	90226201
10W DALI | IP20*	90246403

*revision opening required
more options and specs on page 895

LOXONE VERSIONS ONLINE
weverducre.com/more-match-point

193
329 | 347
415 | 509
571
589 | 685
723 | 729


back




RESTAURANT AUX PETITS OIGNONS | COVARTE JODOIGNE | BELGIUM

BLIEK petit


Ceiling recessed

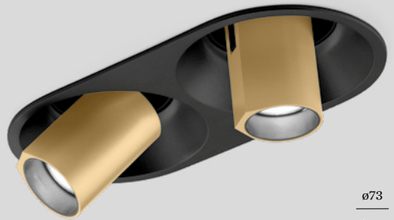
















OPTIONAL

honeycomb louver

	CODE
	915230B0

LOXONE VERSIONS ONLINE

weverducre.com/more-bliek-petit

1.0 TRIMLESS

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-60°|355° M-31° L70|55K

	CODE
	164561W_
	164561CH_
	164561B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	495	>90	3
3000K	530	>90	5
2000-3000K | 16V	340	>90	9

ALWAYS USE

alu plasterkit 78-80 85 12.5, 15, 20, 25

	CODE
	90017210

quick connect driver | 350mA

	CODE
6W	90213303
10W dim	90223406
14W DALI	90243502

*revision opening required and
more options and specs on page 898

1.0

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-60°|355° M-31° L70|55K

wire springs 86-89 60 4-23

	CODE
	164461W_
	164461CH_
	164461B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	495	>90	3
3000K	530	>90	5
2000-3000K | 16V	340	>90	9

ALWAYS USE

quick connect driver | 350mA

	CODE
6W	90213303
10W dim	90223406
14W DALI*	90243502

*revision opening required and
more options and specs on page 898

2.0

2x LED COB 6W | 700mA | 17V
aluminium

IP20 0°-60°|355° M-31° L70|55K

wire springs 87x176 60 4-23

	CODE
	164261W_
	164261CH_
	164261B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x495	>90	3
3000K	2x530	>90	5

ALWAYS USE

driver | 700mA | only 1x needed

	CODE
14W dim	90225502
28W DALI	90245704

more options and specs on page 900





PRIVATE RESIDENCE | UMAMI STUDIO BELGIUM

BLIEK


Ceiling recessed











1.0 LED

LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 0°-60°|355° M-33° L80|55K

wire springs 127 75 4-25

	CODE
	125361W_
	125361K_
	125361B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	600/810 | >90	3
3000K	635/855 | >90	5
4000K	670/905 | >90	7
2000-3000K	445/660 | >90	9

LED module 20 years replaceability

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-60°|350°

wire springs 127 75 4-25

	CODE
	125120W0
	125120K0
	125120B0

ALWAYS USE

quick connect driver | 500mA

	CODE
10W	90214406
10W dim	90224403
15W DALI	90244501

more options and specs on page 898

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905

MORE VERSIONS + LOXONE ONLINE
weverducre.com/more-bliek-round

IC rated


back

hidden

HIDDEN CHAMPIONS

Subtle recessed luminaires stay elegantly in the background while lighting any room perfectly. But low ceilings or limited space can make installation tricky. The solution: ultra-flat recessed luminaires from Wever & Ducré – compact, stylish, and ideal for renovations and small apartments.

Schlichte Einbauleuchten rücken dezent in den Hintergrund und setzen jeden Raum perfekt in Szene. Doch niedrige Decken oder wenig Platz machen den Einbau oft schwierig. Die Lösung: besonders flache Einbauleuchten von Wever & Ducré – kompakt, stilvoll und ideal für Renovierungen und kleine Apartments.


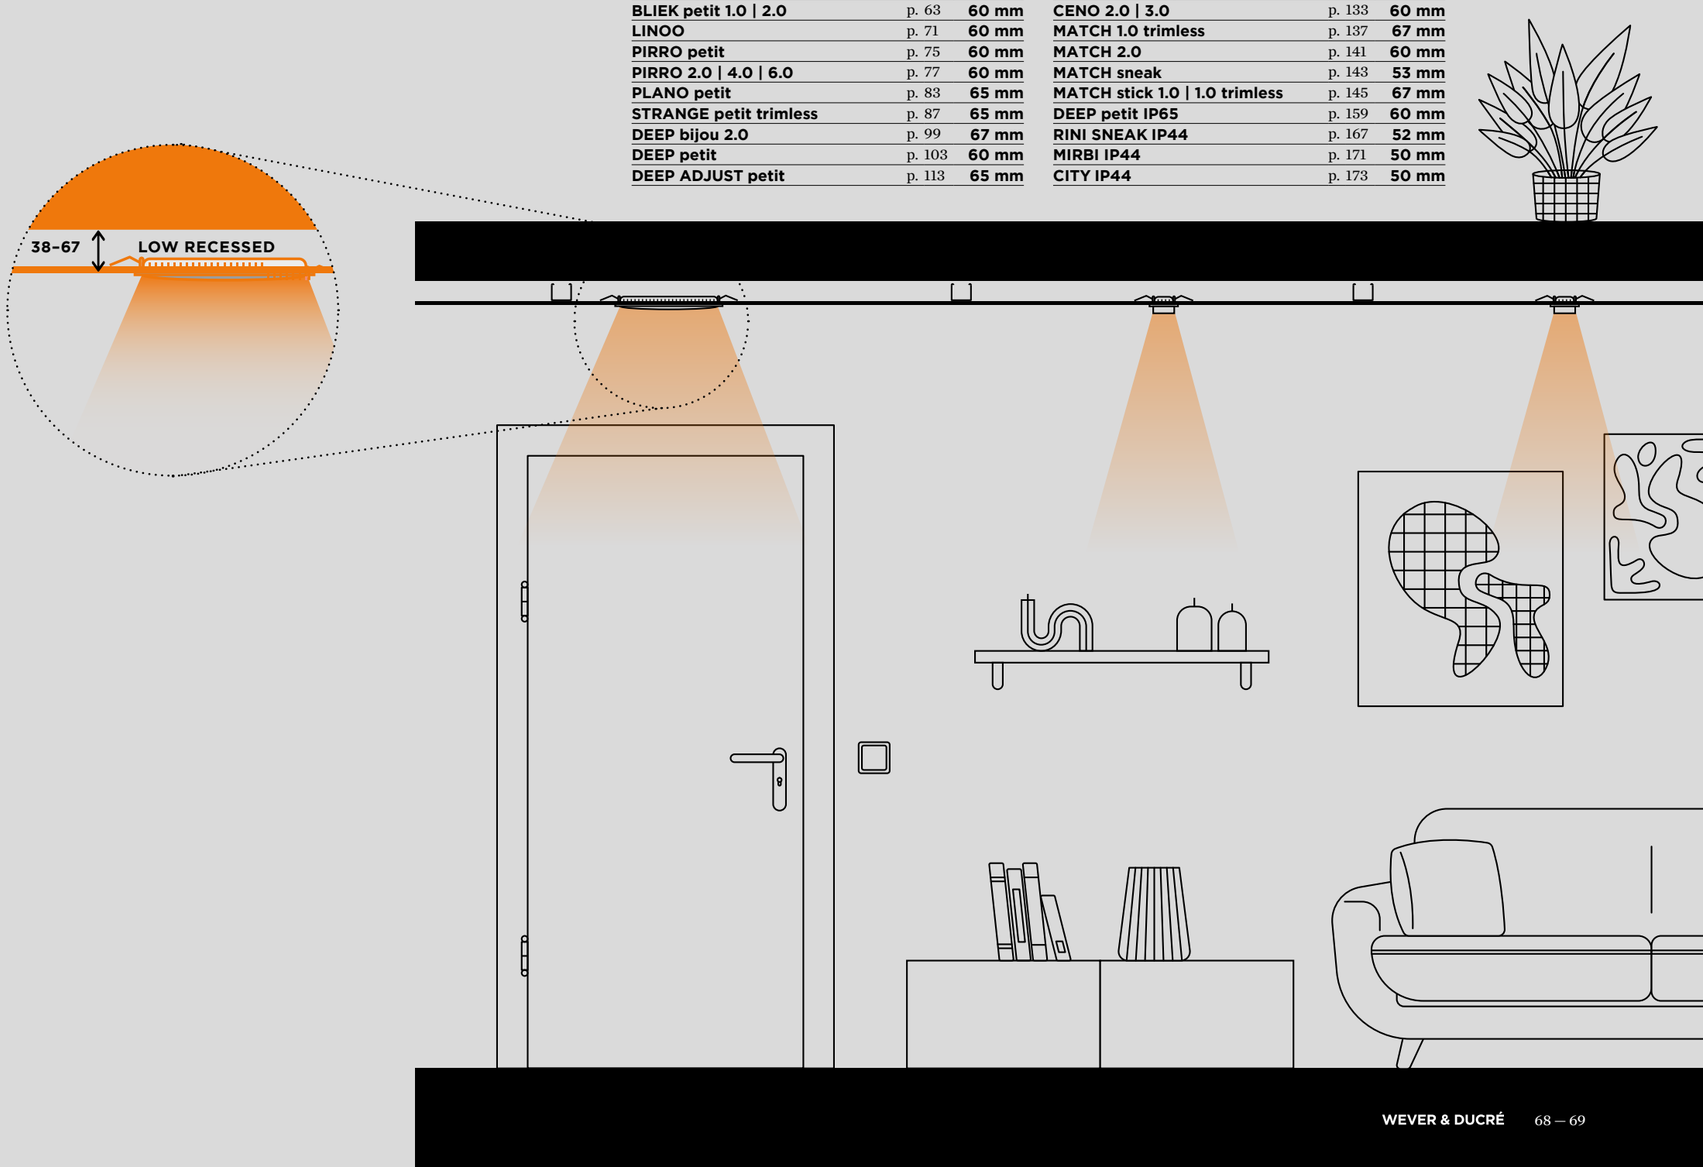


QITO 1.0	p. 57	60 mm
MATCH point 1.0 trimless	p. 61	60 mm
MATCH point 1.0	p. 61	50 mm
BLIEK petit 1.0 | 2.0	p. 63	60 mm
LINOO	p. 71	60 mm
PIRRO petit	p. 75	60 mm
PIRRO 2.0 | 4.0 | 6.0	p. 77	60 mm
PLANO petit	p. 83	65 mm
STRANGE petit trimless	p. 87	65 mm
DEEP bijou 2.0	p. 99	67 mm
DEEP petit	p. 103	60 mm
DEEP ADJUST petit	p. 113	65 mm
RONY point	p. 123	60 mm
RONY petit	p. 125	51 mm
RONY ADJUST petit	p. 127	63 mm
CENO 2.0 | 3.0	p. 133	60 mm
MATCH 1.0 trimless	p. 137	67 mm
MATCH 2.0	p. 141	60 mm
MATCH sneak	p. 143	53 mm
MATCH stick 1.0 | 1.0 trimless	p. 145	67 mm
DEEP petit IP65	p. 159	60 mm
RINI SNEAK IP44	p. 167	52 mm
MIRBI IP44	p. 171	50 mm
CITY IP44	p. 173	50 mm



LINOO

Ceiling recessed








1.0 TRIMLESS

LED PCB 3W | 350mA | 6V
aluminium | polycarbonate
light colour selectable via dip switch

IP20 M-39° L80|50K

wire springs 54-58 60 4-26

2700K/3000K | CRI >90 | 125lm

	CODE
	109961WW9
	109961BB9

ALWAYS USE

driver | 350mA

	CODE
3.5W	90213102
7W dim*	90223301
14W DALI*	90243502

*revision opening required and
2 fixtures needed
more options and specs on page 896

1.0

LED PCB 3W | 350mA | 6V
aluminium | polycarbonate
light colour selectable via dip switch

IP20 M-39° L80|50K

wire springs 36x39 60 4-28

2700K/3000K | CRI >90 | 125lm

	CODE
	109461WW9
	109461BB9

ALWAYS USE

driver | 350mA

	CODE
3.5W	90213102
7W dim*	90223301
14W DALI*	90243502

*revision opening required and
2 fixtures needed
more options and specs on page 896

2.0

LED PCB 5W | 350mA | 12V
aluminium | polycarbonate
light colour selectable via dip switch

IP20 M-39° L80|50K

wire springs 36x67 60 4-28

2700K/3000K | CRI >90 | 2x125lm


	CODE
	109561WW9
	109561BB9

ALWAYS USE


driver | 350mA

	CODE
6W	90213303
7W dim*	90223301
14W DALI*	90243502

*revision opening required
more options and specs on page 896







back



LINOO

Ceiling recessed






















4.0

LED PCB 8W | 350mA | 22V
aluminium | polycarbonate
light colour selectable via dip switch

IP20 M-39° L80|50K

wire springs U118x36 60 4-28

2700K/3000K | CRI >90 | 4x125lm

	CODE
	109161WW9
	109161BB9

ALWAYS USE

driver | 350mA

	CODE
10W dim	90223406
14W DALI	90243502

more options and specs on page 896

4.1

LED PCB 8W | 350mA | 22V
aluminium | polycarbonate
light colour selectable via dip switch

IP20 M-39° L80|50K

wire springs U63x59 60 4-28

2700K/3000K | CRI >90 | 4x125lm

	CODE
	109261WW9
	109261BB9

ALWAYS USE

driver | 350mA

	CODE
10W dim	90223406
14W DALI	90243502

more options and specs on page 896

8.0

LED PCB 16W | 700mA | 22V
aluminium | polycarbonate
light colour selectable via dip switch

IP20 M-39° L80|50K

wire springs U226x36 60 4-28

2700K/3000K | CRI >90 | 8x125lm

	CODE
	109361WW9
	109361BB9

ALWAYS USE

driver | 700mA

	CODE
20W dim	90225604
14W DALI	90245704

more options and specs on page 900

back




PRIVATE RESIDENCE | ORNELLA ABOUAF FRANCE


PIRRO petit


Ceiling recessed

213

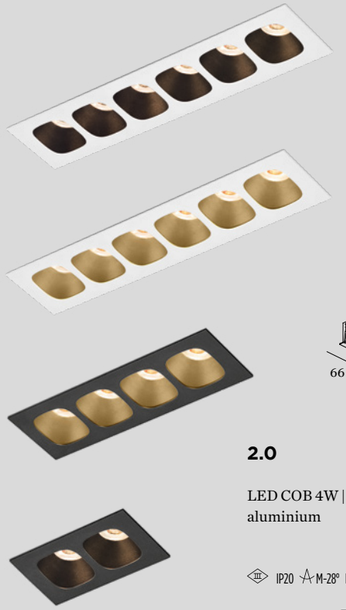







2.0

LED COB 4W | 350mA | 12V
aluminium

IP20 M-28° L80|50K

wire springs 64x33 60 4-25

	CODE
	129151E_
	129151WM_
	129151CH_
	129151B_

LIGHT COLOUR	LUMEN|CRI	CODE
2700K	2x160|>90	3
3000K	2x165|>90	5

ALWAYS USE

driver | 350mA

	CODE
4.5W dim	90223101
14W DALI	90243502

revision opening required
more options and specs on page 897

4.0

LED COB 8W | 350mA | 24V
aluminium

IP20 M-28° L80|50K

wire springs 116x33 60 4-25

	CODE
	129251E_
	129251WM_
	129251CH_
	129251B_

LIGHT COLOUR	LUMEN|CRI	CODE
2700K	4x160|>90	3
3000K	4x165|>90	5

ALWAYS USE

driver | 350mA

	CODE
10W dim	90223406
14W DALI	90243502

more options and specs on page 896

6.0

LED COB 12W | 350mA | 36V
aluminium

IP20 M-28° L80|50K

wire springs 168x33 60 4-25

	CODE
	129351E_
	129351WM_
	129351CH_
	129351B_


LIGHT COLOUR	LUMEN|CRI	CODE
2700K	6x160|>90	3
3000K	6x165|>90	5

ALWAYS USE

driver | 350mA

	CODE
13W dim	90223404
14W DALI	90243502

more options and specs on page 896





LOXONE VERSIONS ONLINE
weverducre.com/more-pirro-petit




LA PARISIENNE | I:ARHITEKT LJUBOVIC | MONTENEGRO

PIRRO

Ceiling recessed









1.0

LED COB 5W | 500mA | 9V
aluminium

IP20 M-32° L70|55K

wire springs 50x50 60 4-25

	CODE
	150161E_
	150161J_
	150161K_
	150161B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	395	>90	3
3000K	410	>90	5

ALWAYS USE

driver | 500mA

	CODE
6W	90214201
6.5W dim*	90224301
24W DALI*	90244701

*revision opening required
more options and specs on page 897

2.0

LED COB 9W | 500mA | 18V
aluminium

IP20 M-32° L70|55K

wire springs 93x50 60 4-25

	CODE
	150261E_
	150261J_
	150261K_
	150261B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x395	>90	3
3000K	2x410	>90	5

ALWAYS USE

driver | 500mA

	CODE
10W	90214406
10W dim	90224403
24W DALI	90244701

more options and specs on page 897

60 mm
low recessed

IC rated

215

371


back





PRIVATE RESIDENCE | INTERIOR STUDIO VAN MAANEN THE NETHERLANDS

PIRRO

Ceiling recessed

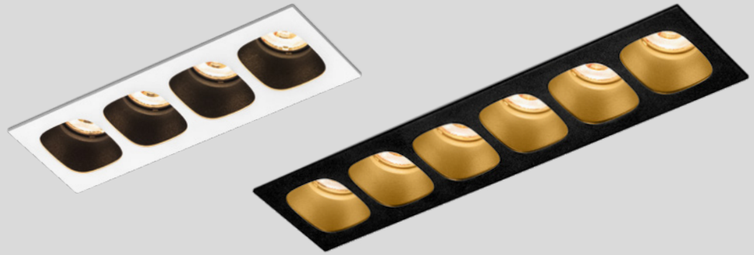





4.0

LED COB 17W | 500mA | 36V
aluminium

IP20 M-32° L70|55K

wire springs 181x50 60 4-25

	CODE
	150461E_
	150461J_
	150461K_
	150461B_

LIGHT COLOUR	LUMEN|CRI	CODE
2700K	4x395|>90	3
3000K	4x410|>90	5

ALWAYS USE

driver | 500mA | only 1x needed

	CODE
17.5W	90218601
19W dim	90224602
24W DALI	90244701

more options and specs on page 898

6.0

LED COB 25W | 500mA | 2x27V
aluminium

IP20 M-32° L70|55K

wire springs 269x50 60 4-25

	CODE
	150661E_
	150661J_
	150661K_
	150661B_


LIGHT COLOUR	LUMEN|CRI	CODE
2700K	6x395|>90	3
3000K	6x410|>90	5

ALWAYS USE

driver | 500mA | 2x needed

	CODE
17.5W	90218601
19W dim	90224602
24W DALI	90244701

more options and specs on page 898






Kingsley
Amis





PRIVATE RESIDENCE | ANKER & CO DENMARK

PLANO petit

Ceiling recessed













1.0

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-25°|355° M-31° L70|55K

wire springs 54x59 65 2-22

	CODE
	162461W_
	162461Q_
	162461B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	550	>90	3
3000K	580	>90	5
2000-3000K | 16V	465	>90	9

LED module 20 years replaceability

ALWAYS USE

quick connect driver | 350mA

	CODE
6W	90213303
10W dim	90223406
14W DALI*	90243502

*revision opening required
more options and specs on page 896

2.0

2x LED COB 6W | 350mA | 17V
aluminium

IP20 0°-25°|355° M-31° L70|55K

wire springs 54x110 65 2-22

	CODE
	162561W_
	162561Q_
	162561B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x550	>90	3
3000K	2x580	>90	5
2000-3000K | 16V	2x465	>90	9

LED module 20 years replaceability

ALWAYS USE

quick connect driver | 350mA
2x needed

	CODE
6W	90213303
10W dim	90223406
14W DALI	90243502

more options and specs on page 896

3.0

3x LED COB 6W | 350mA | 17V
aluminium

IP20 0°-25°|355° M-31° L70|55K

wire springs 54x162 65 2-22

	CODE
	162661W_
	162661Q_
	162661B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	3x550	>90	3
3000K	3x580	>90	5
2000-3000K | 16V	3x465	>90	9


LED module 20 years replaceability

ALWAYS USE

quick connect driver | 350mA
3x needed

	CODE
6W	90213303
10W dim	90223406
14W DALI	90243502

more options and specs on page 896





MORE VERSIONS + LOXONE ONLINE
weverducre.com/more-plano-petit


back





PRIVATE RESIDENCE | STUDIO BENOIT BELGIUM


PLANO


Ceiling recessed




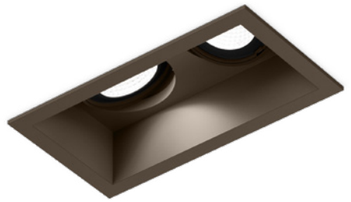









1.0 LED

LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 0°-35°|355° M-34° L80|55K

wire springs 74x78 95 2-18

	CODE
	118561W_
	118561Q_
	118561B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	610/820	>90	3
3000K	645/870	>90	5
2000-3000K	450/665	>90	9

LED module 20 years replaceability

ALWAYS USE

quick connect driver | 500mA

	CODE
10W	90214406
10W dim	90224403
15W DALI	90244501

more options and specs on page 898

2.0 LED

2x LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 0°-35°|355° M-34° L80|55K

wire springs 74x148 95 2-18

	CODE
	118661W_
	118661Q_
	118661B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x610/820	>90	3
3000K	2x645/870	>90	5
2000-3000K	2x450/665	>90	9

LED module 20 years replaceability

ALWAYS USE

quick connect driver | 500mA
2x needed

	CODE
10W	90214406
10W dim	90224403
15W DALI	90244501

more options and specs on page 898

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-35°|355°

wire springs 74x78 125 2-18

	CODE
	118120W0
	118120Q0
	118120B0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905

2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-35°|355°

wire springs 74x148 125 2-18

	CODE
	118220W0
	118220Q0
	118220B0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905





PRIVATE RESIDENCE SPAIN


STRANGE petit


Ceiling recessed











1.0 TRIMLESS

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-25°|355°- M-31° L80|55K

	CODE
	163461W_
	163461M_
	163461Q_
	163461B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	550	>90	3
3000K	580	>90	5
2000-3000K	465	>90	9

LED module 20 years replaceability

ALWAYS USE

alu plasterkit U64x64 65 7-32

	CODE
	90017202

quick connect driver | 350mA

	CODE
6W	90213303
10W dim	90223406
14W DALI	90243502

more options and specs on page 896

2.0 TRIMLESS

2x LED COB 6W | 350mA | 17V
aluminium

IP20 0°-25°|355°- M-31° L80|55K

	CODE
	163561W_
	163561M_
	163561Q_
	163561B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x550	>90	3
3000K	2x580	>90	5
2000-3000K	2x465	>90	9

LED module 20 years replaceability

ALWAYS USE

alu plasterkit U64x117 65 7-32

	CODE
	90017205

quick connect driver | 350mA
2x needed

	CODE
6W	90213303
10W dim	90223406
14W DALI	90243502

more options and specs on page 897

3.0 TRIMLESS

3x LED COB 6W | 350mA | 17V
aluminium

IP20 0°-25°|355°- M-31° L80|55K

	CODE
	163661W_
	163661M_
	163661Q_
	163661B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	3x550	>90	3
3000K	3x580	>90	5
2000-3000K	3x465	>90	9

LED module 20 years replaceability

ALWAYS USE


alu plasterkit U64x169 65 7-32

	CODE
	90017208

quick connect driver | 350mA
3x needed

	CODE
6W	90213303
10W dim	90223406
14W DALI	90243502

more options and specs on page 896




LOXONE VERSIONS ONLINE
weverducre.com/more-strange-petit




VULÉ LUXURY APARTMENTS MILANO | MAST ARCHITECTURE MILAN | ITALY

STRANGE trimless

Ceiling recessed





1.0 LED

LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 0°-35°|355° M-34° L80|55K

	CODE
	131461W_
	131461Q_
	131461B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	610/820	>90	3
3000K	645/870	>90	5
2000-3000K	450/665	>90	9

LED module 20 years replaceability

ALWAYS USE

alu plasterkit 86x86 95 7-32


	CODE
	90017120

quick connect driver | 500mA

	CODE
10W	90214406
10W dim	90224403
15W DALI	90244501

more options and specs on page 898





2.0 LED

2x LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 0°-35°|355° M-34° L80|55K

	CODE
	131561W_
	131561Q_
	131561B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x610/820	>90	3
3000K	2x645/870	>90	5
2000-3000K	2x450/665	>90	9

LED module 20 years replaceability

ALWAYS USE


alu plasterkit 86x156 95 7-32

	CODE
	90017121

quick connect driver | 500mA
2x needed

	CODE
10W	90214406
10W dim	90224403
15W DALI	90244501

more options and specs on page 898



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-35°|355°

	CODE
	131120W0
	131120Q0
	131120B0

ALWAYS USE

alu plasterkit 86x86 125 7-32


	CODE
	90017120

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905



2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-35°|355°

	CODE
	131220W0
	131220Q0
	131220B0

ALWAYS USE

alu plasterkit 86x156 125 7-32

	CODE
	90017121

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905





PRIVATE RESIDENCE | STUDIO BENOIT BELGIUM


SNEAK


Ceiling recessed











1.0 TRIMLESS

LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 0°-35°|355° M-30° L80|55K

	CODE
	155551WW_
	155551BM_
	155551BB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	340/460	>90	3
3000K	360/485	>90	5
2000-3000K	250/370	>90	9

LED module 20 years replaceability

ALWAYS USE

alu plasterkit 86x86 95 7-32

	CODE
	90017120

quick connect driver | 500mA

	CODE
10W	90214406
10W dim	90224403
15W DALI	90244501

more options and specs on page 898

2.0 TRIMLESS

2x LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 0°-35°|355° M-30° L80|55K

	CODE
	155651WW_
	155651BM_
	155651BB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x340/460	>90	3
3000K	2x360/485	>90	5
2000-3000K	2x250/370	>90	9

LED module 20 years replaceability

ALWAYS USE

alu plasterkit 86x156 95 7-32

	CODE
	90017121

quick connect driver | 500mA
2x needed

	CODE
10W	90214406
10W dim	90224403
15W DALI	90244501

more options and specs on page 898

LOXONE VERSIONS ONLINE
weverducre.com/more-sneak


back




PRIVATE RESIDENCE | RARDO ARCHITECTS SPAIN


SNEAK

Ceiling recessed









1.0

LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 0°-35°|355° M-30° L80|55K

wire springs 74x78 95 2-18

	CODE
	155751WW_
	155751BM_
	155751BB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	340/460	>90	3
3000K	360/485	>90	5
2000-3000K	250/370	>90	9

LED module 20 years replaceability

ALWAYS USE

quick connect driver | 500mA

	CODE
10W	90214406
10W dim	90224403
15W DALI	90244501

more options and specs on page 898

2.0

2x LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 0°-35°|355° M-30° L80|55K

wire springs 74x148 95 2-18

	CODE
	155851WW_
	155851BM_
	155851BB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x340/460	>90	3
3000K	2x360/485	>90	5
2000-3000K	2x250/370	>90	9

LED module 20 years replaceability

ALWAYS USE

quick connect driver | 500mA
2x needed

	CODE
10W	90214406
10W dim	90224403
15W DALI	90244501

more options and specs on page 898

LOXONE VERSIONS ONLINE
weverducre.com/more-sneak

deep how

weverducre.com/deep

DEEP



point 1.0
LED
p. 97



bijou 1.0
LED
p. 99



bijou 2.0
LED
p. 99



petit 1.0
LED
p. 103



1.0
LED | PAR16
p. 107



point IP44 1.0
LED
p. 155



bijou IP65 1.0
LED
p. 157



petit IP65 1.0
LED
p. 159



IP65 | IP44 1.0
LED | PAR16
p. 161


DEEP ADJUST



petit 1.0
LED
p. 113




petit trimless 1.0
LED
p. 113



1.0
LED | PAR16
p. 119



trimless 1.0
LED | PAR16
p. 117



2.0
LED | PAR16
p. 121

DEEP CONNECTIONS

DEEP and DEEPER provide classic downlighting for hallways, living rooms, or bathrooms – optionally in IP44 or IP65 for splash- and jet-water protection. The family is now complemented by DEEP IQ made from 3D-printed material, as well as the nearly invisible trimless ADJUST variants.

DEEP und DEEPER liefern klassisches Downlight für Flur, Wohnzimmer oder Bad – auf Wunsch auch als IP44 oder IP65 für spritz- und strahlwassergeschützte Anwendungen. Ergänzt wird die Familie nun durch DEEP IQ aus 3D-gedrucktem Material sowie die nahezu unsichtbaren Trimless-ADJUST-Varianten.

DEEPER



1.0
LED | PAR16
p. 109



IP44 1.0
LED | PAR16
p. 163

DEEP IQ




petit 1.0
LED
p. 101




1.0
LED
p. 105

DEEP ADJUST IQ



petit 1.0
LED
p. 111



1.0
LED
p. 115



PRIVATE RESIDENCE SPAIN

DEEP point

Ceiling recessed







1.0

LED COB 5W | 250mA | 17V
aluminium

IP20 M-32° L80|50K

wire springs 40-41 68 4-25

	CODE
	185261W_
	185261M_
	185261Q_
	185261B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	405	>90	3
3000K	425	>90	5

1.0 IP44

LED COB 5W | 250mA | 17V
aluminium

IP44 M-32° L80|50K

wire springs 40-41 68 4-25

	CODE
	185161W_
	185161Q_
	185161B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	355	>90	3
3000K	400	>90	5

ALWAYS USE

quick connect driver | 250mA

	CODE
5W dim	90226201
10W DALI	90246403

revision opening required
more options and specs on page 895

ALWAYS USE

quick connect driver | 250mA

	CODE
5W dim	90226201
10W DALI	90246403

revision opening required
more options and specs on page 895

LOXONE VERSIONS ONLINE
weverducre.com/more-deep-point

IC rated

155

back



PRIVATE RESIDENCE | ARNOLD ORY FRANCE

DEEP bijou

Ceiling recessed









1.0

LED COB 4W | 250mA | 17V
aluminium

IP20 M-31° L80|50K

wire springs 50-52 85 4-25

	CODE
	165161W_
	165161M_
	165161G_
	165161Q_
	165161B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	480	>90	3
3000K	510	>90	5

2.0


2x LED COB 4W | 250mA | 34V
aluminium

IP20 M-31° L80|50K

wire springs 50-52x100-104 67 4-25

	CODE
	165261W_
	165261M_
	165261G_
	165261Q_
	165261B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x480	>90	3
3000K	2x510	>90	5





ALWAYS USE

quick connect driver | 250mA

	CODE
5W dim	90226201
10W DALI*	90246403

*revision opening required
more options and specs on page 895

ALWAYS USE

quick connect driver | 250mA
only 1x needed

	CODE
10.5W dim	90226501
10W DALI	90246403

more options and specs on page 895

MORE VERSIONS + LOXONE ONLINE
weverducre.com/more-deep-bijou

741

back





DEEP petit IQ

Ceiling recessed



1.0

LED COB 3W | 200mA | 18V
recycled PET for RP
others 3D printed ASA

IP20 W-41° L80|80K

blade springs 74-76 .85 min.8

	CODE
	199151W_
	199151SG_
	199151RP_
	199151B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	360 | >90	3
3000K	370 | >90	5

ALWAYS USE

quick connect driver | 200mA

	CODE
10W dim*	90226402
8W DALI	90246302

*min. 2 luminaires per driver
more options and specs on page 894

high efficient LED

reduced CO_2

3D printed by IQ LUX

MORE VERSIONS ONLINE
weverducre.com/more-deep-petit-IQ


back



PRIVATE RESIDENCE | ROOD3 INTERIEURONTWERP BELGIUM

DEEP petit

Ceiling recessed

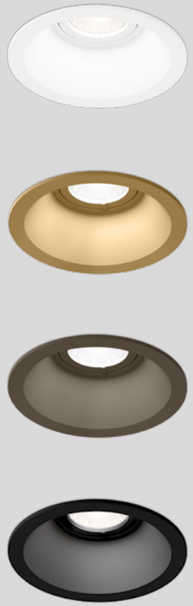





1.0

LED COB 6W | 350mA | 17V
aluminium

IP20 M-31° L80|50K

wire springs ø68-70 60 4-23

	CODE
	153561W_
	153561M_
	153561G_
	153561Q_
	153561B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	615	>90	3
3000K	650	>90	5
2000-3000K | 16V	465	>90	9

1.0 IP65


LED COB 6W | 350mA | 17V
aluminium

IP65 M-31° L80|50K

wire springs ø68-70 60 4-25

	CODE
	153761W_
	153761Q_
	153761B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	590	>90	3
3000K	615	>90	5





LOXONE VERSIONS ONLINE
weverducre.com/more-deep-petit

ALWAYS USE

quick connect driver | 350mA

	CODE
6W	90213303
10W dim	90223406
14W DALI*	90243502

*revision opening required
more options and specs on page 896

ALWAYS USE

driver | 350mA

	CODE
6W | IP20	90213303
10w dim | IP20	90223406
17W | IP68*	90213602

*revision opening required
more options and specs on page 896


back



DEEP IQ

Ceiling recessed





1.0

LED COB 6W | 180mA | 36V
recycled PET for RP
others 3D printed ASA

IP20 M-40° L80|80K

blade springs 85-87 77 min.8

	CODE
	199351W_
	199351SG_
	199351RP_
	199351B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	780	>90	3
3000K	800	>90	5

high efficient LED

reduced CO_2

3D printed by IQ LUX

ALWAYS USE

quick connect driver | 180mA

	CODE
7.5W dim	90226202
7.2W DALI	90246301

more options and specs on page 894

MORE VERSIONS ONLINE
weverducre.com/more-deep-IQ

back



LOOTENS | OR ARCHITECTEN | WIM LAHOUSSE HARELBEKE | BELGIUM

DEEP

Ceiling recessed













1.0 LED

LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 M-34° L80|55K

wire springs 76-79 90 4-27

	CODE
	184261W_
	184261M_
	184261G_
	184261Q_
	184261B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	635/855	>90	3
3000K	670/905	>90	5
4000K	710/955	>90	7
2000-3000K	470/695	>90	9

LED module 20 years replaceability

ALWAYS USE

quick connect driver | 500mA

	CODE
10W	90214406
10W dim	90224403
15W DALI	90244501

more options and specs on page 898

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

wire springs 76-79 115 4-27

	CODE
	112120W0
	112120M0
	112120G0
	112120Q0
	112120B0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905

MORE VERSIONS + LOXONE ONLINE
weverducre.com/more-deep

745

back



PRIVATE RESIDENCE | STUDIO ZUYD THE NETHERLANDS

DEEPER

Ceiling recessed













1.0 LED

LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 M-34° L80|55K

wire springs 76-79 90 4-38

	CODE
	152361W_
	152361M_
	152361Q_
	152361B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	635/850	>90	3
3000K	670/900	>90	5
2000-3000K	470/695	>90	9

LED module 20 years replaceability

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

wire springs 76-79 120 4-38

	CODE
	152120W0
	152120M0
	152120Q0
	152120B0

ALWAYS USE

quick connect driver | 500mA

	CODE
10W	90214406
10W dim	90224403
15W DALI	90244501

more options and specs on page 898

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905

MORE VERSIONS + LOXONE ONLINE
weverducre.com/more-deeper



DEEP ADJUST petit IQ

Ceiling recessed





1.0

LED COB 3W | 200mA | 18V
recycled PET for RP
others 3D printed ASA

IP20 0°-25°|360° W-41° L80|80K

blade springs 74-76 .87 min.8

	CODE
	199251W_
	199251SG_
	199251RP_
	199251B_

LIGHT COLOUR	LUMEN|CRI	CODE
2700K	360|>90	3
3000K	370|>90	5

ALWAYS USE

quick connect driver | 200mA

	CODE
10W dim*	90226402
8W DALI	90246302

*2 luminaires per driver
more options and specs on page 894

high efficient LED

reduced CO_2

3D printed by IQ LUX

MORE VERSIONS ONLINE
weverducre.com/more-deep-adjust-petit-IQ


back



DU ROC SUISSE | BOCION & BILLIGER SA ZUG | SWITZERLAND

DEEP ADJUST petit

Ceiling recessed

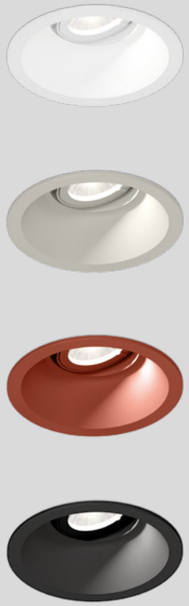





1.0 TRIMLESS

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-35°|360° M-31° L70|50K

	CODE
	153461W_
	153461Q_
	153461B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	555	>90	3
3000K	585	>90	5
2000-3000K | 16V	470	>90	9

LED module 20 years replaceability

ALWAYS USE

alu plasterkit 78-80 65 12.5, 15, 20, 25

	CODE
	90017210

quick connect driver | 350mA

	CODE
6W	90213303
10W dim	90223406
14W DALI*	90243502

*revision opening required and
more options and specs on page 896

1.0

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-35°|355° M-31° L70|50K

wire springs 68-70 65 4-23

	CODE
	153661W_
	153661M_
	153661G_
	153661SG_
	153661ME_
	153661Q_
	153661B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	555	>90	3
3000K	585	>90	5
2000-3000K | 16V	470	>90	9


LED module 20 years replaceability

ALWAYS USE

quick connect driver | 350mA

	CODE
6W	90213303
10W dim	90223406
14W DALI*	90243502

*revision opening required and
more options and specs on page 896



MORE VERSIONS + LOXONE ONLINE
weverducre.com/more-deep-adjust-petit


back




DEEP ADJUST IQ

Ceiling recessed











1.0

LED COB 6W | 180mA | 36V
recycled PET for RP
others 3D printed ASA

IP20 0°-21°|360° M-40° L80|80K

blade springs 85-87 85 min.8

	CODE
	199451W_
	199451SG_
	199451RP_
	199451B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	780	>90	3
3000K	800	>90	5

ALWAYS USE

quick connect driver | 180mA

	CODE
7W dim	90226202
7.2W DALI	90246301

more options and specs on page 894

high efficient LED

reduced CO_2

3D printed by IQ LUX


MORE VERSIONS ONLINE
weverducre.com/more-deep-adjust-IQ

back











DEEP ADJUST trimless

Ceiling recessed





1.0 LED

LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 0°-35°|35°-M-34° L80|55K

	CODE
	184861W_
	184861M_
	184861Q_
	184861B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	635/855	>90	3
3000K	670/905	>90	5
4000K	710/955	>90	7
2000-3000K	470/695	>90	9

LED module 20 years replaceability

ALWAYS USE

alu plasterkit ⌀105-110 95 12.5, 15, 20, 25

	CODE
	90017209

quick connect driver | 500mA

	CODE
10W	90214406
10W dim	90224403
15W DALI	90244501

more options and specs on page 898

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-35°|35°

	CODE
	112820W0
	112820M0
	112820Q0
	112820B0

ALWAYS USE

alu plasterkit ⌀105-110 120 12.5, 15, 20, 25

	CODE
	90017209

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905

MORE VERSIONS + LOXONE ONLINE
weverducre.com/more-deep-adjust-trimless





PRIVATE RESIDENCE | AJ ARCHITECTEN BELGIUM


DEEP ADJUST

Ceiling recessed













1.0 LED

LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 0°-35°|355° M-34° L80|55K

wire springs 86-89 90 4-23

	CODE
	184361W_
	184361M_
	184361G_
	184361Q_
	184361B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	635/855	>90	3
3000K	670/905	>90	5
4000K	710/955	>90	7
2000-3000K	470/695	>90	9

LED module 20 years replaceability

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-35°|355°

wire springs 86-89 115 4-23

	CODE
	112320W0
	112320M0
	112320G0
	112320Q0
	112320B0

ALWAYS USE

quick connect driver | 500mA

	CODE
10W	90214406
10W dim	90224403
15W DALI	90244501

more options and specs on page 898

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905

MORE VERSIONS + LOXONE ONLINE
weverducre.com/more-deep-adjust

back




PRIVATE RESIDENCE | INTÉRIEURS D'ARCHITECTES FRANCE

DEEP ADJUST

Ceiling recessed







2.0 LED

2x LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 0°-35°|355° M-34° L80|55K

wire springs 89x172-178 90 4-23

	CODE
	184761W_
	184761M_
	184761Q_
	184761B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x635/855	>90	3
3000K	2x670/905	>90	5
4000K	2x710/955	>90	7
2000-3000K	2x470/695	>90	9

LED module 20 years replaceability

2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-35°|355°

wire springs 89x172-178 115 4-23

	CODE
	112720W0
	112720M0
	112720Q0
	112720B0

ALWAYS USE

quick connect driver | 500mA
2x needed

	CODE
10W	90214406
10W dim	90224403
15W DALI	90244501

more options and specs on page 898

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905

LOXONE VERSIONS ONLINE
weverducre.com/more-deep-adjust

back



RONY point

Ceiling recessed





1.0


LED COB 5W | 250mA | 17V
aluminium

IP20 M-32° L80|50K

wire springs 48-51 60 4-25

	CODE
	193161W_
	193161Q_
	193161B_

LIGHT COLOUR	LUMEN|CRI	CODE
2700K	405|>90	3
3000K	425|>90	5





ALWAYS USE

quick connect driver | 250mA

	CODE
5W dim	90226201
10W DALI*	90246403

*revision opening required
more options and specs on page 895

MORE VERSIONS + LOXONE ONLINE
weverducre.com/more-rony-point

back







RONY petit

Ceiling recessed



1.0


LED COB 6W | 350mA | 17V
aluminium

IP20 M-31° L80|50K

wire springs 68-70 51 4-24

	CODE
	110361W_
	110361B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	650	>90	3
3000K	685	>90	5
2000K-3000K | 16V	495	>90	9





ALWAYS USE

quick connect driver | 350mA

	CODE
6W	90213303
10W dim	90223406
14W DALI*	90243502

*revision opening required
more options and specs on page 896

LOXONE VERSIONS ONLINE
weverducre.com/more-rony-petit

back



PRIVATE RESIDENCE | STUDIO BINNEN THE NETHERLANDS

RONY ADJUST petit

Ceiling recessed









1.0


LED COB 6W | 350mA | 17V
aluminium

IP20 0°-35°|355° M-31° L80|50K

wire springs 68-70 L63 4-22

	CODE
	110461W_
	110461Q_
	110461B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	555	>90	3
3000K	585	>90	5
2000K-3000K | 16V	470	>90	9





ALWAYS USE

quick connect driver | 350mA

	CODE
6W	90213303
10W dim	90223406
14W DALI*	90243502

*revision opening required
more options and specs on page 896

MORE VERSIONS + LOXONE ONLINE
weverducre.com/more-rony-adjust-petit

back



PRIVATE RESIDENCE | CANDICE BRUNY FRANCE

RONY ADJUST

Ceiling recessed









1.0 LED

LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 0°-35°|355° M-34° L80|55K

wire springs 102-104 90 4-25

	CODE
	110261W_
	110261B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	635/860	>90	3
3000K	675/905	>90	5
2000-3000K	475/700	>90	9

LED module 20 years replaceability

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-35°|355°

wire springs 102-104 110 4-25

	CODE
	110120W0
	110120B0

ALWAYS USE

quick connect driver | 500mA

	CODE
10W	90214406
10W dim	90224403
15W DALI	90244501

more options and specs on page 898

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905

MORE VERSIONS + LOXONE ONLINE
weverducre.com/more-rony-adjust

back



PRIVATE RESIDENCE | INTERIOR STUDIO VAN MAANEN THE NETHERLANDS


CENO


Ceiling recessed











1.0 SEMI RECESSED

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-90°|350° M-31° L70|55K

	CODE
	176561W_
	176561B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	500	>90	3
3000K	530	>90	5

1.0

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-90°|350° M-31° L70|55K

wire springs 45-47 75 4-26

	CODE
	176161W_
	176161G_
	176161Q_
	176161K_
	176161CH_
	176161B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	500	>90	3
3000K	530	>90	5
2000-3000K | 16V	345	>90	9

IC rated

honeycomb

OPTIONAL

honeycomb louver

	CODE
	915230B0

ALWAYS USE

quick connect driver | 350mA

	CODE
6W	90213303
7W dim	90223301
14W DALI	90243502

revision opening required
more options and specs on page 896

ALWAYS USE

driver | 350mA

	CODE
6W	90213303
7W dim	90223301
14W DALI*	90243502

*revision opening required
more options and specs on page 896

MORE VERSIONS ONLINE
weverducre.com/more-ceno





OFFICE BOES & VERRUE | ARCHITECT DEWITTE KORTRIJK | BELGIUM


CENO


Ceiling recessed




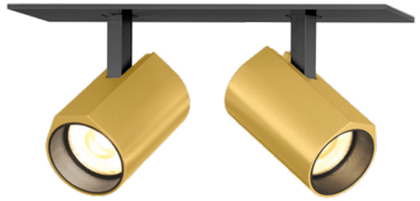














OPTIONAL

honeycomb louver

	CODE
	915230B0

LOXONE VERSIONS ONLINE

weverducre.com/more-ceno-recessed

1.1

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-90°|350° M-31° L70|55K

blade springs 32x66 75 min. 4

	CODE
	176461W_
	176461Q_
	176461K_
	176461B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	500	>90	3
3000K	530	>90	5

ALWAYS USE

quick connect driver | 350mA

	CODE
6W	90213303
7W dim	90223301
14W DALI	90243502

more options and specs on page 896

2.0

2x LED COB 6W | 700mA | 17V
aluminium

IP20 0°-90°|350° M-31° L70|55K

blade springs 32x145 60 min. 4

	CODE
	176261W_
	176261Q_
	176261K_
	176261B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x500	>90	3
3000K	2x530	>90	5

ALWAYS USE

driver | 700mA | only 1x needed

	CODE
14W dim	90225502
28W DALI	90245704

more options and specs on page 900

3.0

3x LED COB 6W | 700mA | 26V
aluminium

IP20 0°-90°|350° M-31° L70|55K

blade springs 32x221 60 min. 4

	CODE
	176361W_
	176361Q_
	176361K_
	176361B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	3x500	>90	3
3000K	3x530	>90	5

ALWAYS USE

driver | 700mA | only 1x needed

	CODE
20W dim	90225604
28W DALI	90245704

more options and specs on page 900



reddot winner 2024

LECA

Ceiling recessed







189

325

569



1.0

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-90°|350° M-31° L80|50K

wire springs 40-41 75 4-26

2700K | CRI >90 | 585lm

	CODE
	188161W3
	188161Q3
	188161B3





OPTIONAL

honeycomb louver

	CODE
	915230B0

ALWAYS USE


quick connect driver | 350mA

	CODE
7W dim	90223301
14W DALI*	90243502

*revision opening required
more options and specs on page 896

LOXONE VERSIONS ONLINE
weverducre.com/more-leca

back

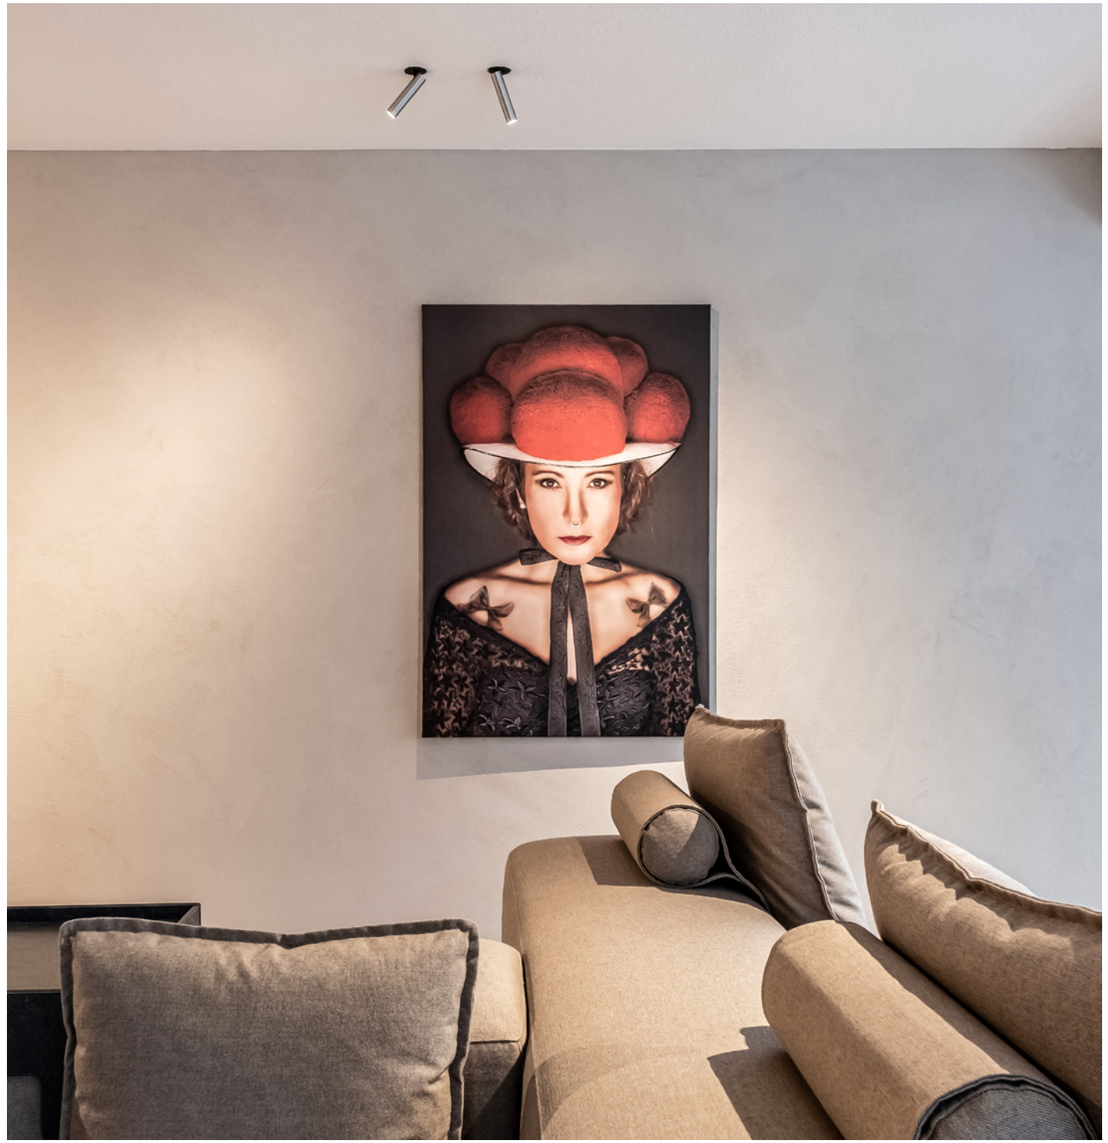


WALDBLICK WELLNESS | EW STUDIO FREUDENSTADT | GERMANY

DESIGN AWARD 2023 · GOOD DESIGN · reddot winner 2023

MATCH

Ceiling recessed







1.0 TRIMLESS

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-90°|360° M-30° L80|50K

45-47 67 4-26

	CODE
	190851W_
	190851BL_
	190851Q_
	190851B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	525	>90	3
3000K	555	>90	5

ALWAYS USE

quick connect driver | 350mA

	CODE
6W	90213303
7W dim	90223301
14W DALI	90243502

revision opening required
more options and specs on page 896

1.0

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-90°|350° M-30° L80|50K

wire springs 45-47 75 4-26

	CODE
	190151W_
	190151BL_
	190151Q_
	190151B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	525	>90	3
3000K	555	>90	5

ALWAYS USE

quick connect driver | 350mA

	CODE
6W	90213303
7W dim	90223301
14W DALI*	90243502

*revision opening required
more options and specs on page 896

≤67 mm
1.0 trimless
low recessed

IC rated

MORE VERSIONS + LOXONE ONLINE
weverducre.com/more-match-recessed

193
329 | 347
415 | 509
571
589 | 685
723 | 729





THINKING MU STORE BARCELONA | ISERN SERRA BARCELONA | SPAIN



PALM BEACH
ATHENS
CHIC STAYS
CINEMATIC


PRIVATE RESIDENCE | UNIQUE RENOVATIONS BELGIUM

DESIGN AWARD 2023 · GOOD DESIGN · reddot winner 2023



MATCH

Ceiling recessed



2.0

2x LED COB 6W | 700mA | 17V
aluminium

IP20 0°-90°|350° M-30° L80|50K

wire springs 105x30 60 4-26

	CODE
	190251W_
	190251Q_
	190251B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	2x515 | >90	3
3000K	2x545 | >90	5

ALWAYS USE

quick connect driver | 700mA
only 1x needed

	CODE
14W dim	90225502
28W DALI	90245704

more options and specs on page 900

60 mm
low recessed

IC rated

MORE VERSIONS + LOXONE ONLINE
weverducre.com/more-match-recessed

193
329 | 347
415 | 509
571
589 | 685
723 | 729

back



PRIVATE RESIDENCE | BUREAU DESTADSBADER BELGIUM


DESIGN AWARD 2023 · GOOD DESIGN · reddot winner 2023


MATCH SNEAK

Ceiling recessed









1.0 TRIMLESS

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-55°|350° M-30° L80|50K

	CODE
	190451W_
	190451L_
	190451M_
	190451Q_
	190451GM_
	190451B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	535	>90	3
3000K	565	>90	5

1.0


LED COB 6W | 350mA | 17V
aluminium

IP20 0°-55°|350° M-30° L80|50K

wire springs 64-68 53 4-26

	CODE
	190351W_
	190351L_
	190351M_
	190351Q_
	190351GM_
	190351B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	525	>90	3
3000K	555	>90	5





ALWAYS USE

alu plasterkit 78-80 45 12.5,15,20,25

	CODE
	90017210

quick connect driver | 350mA

	CODE
6W	90213303
7W dim	90223301
14W DALI	90243502

more options and specs on page 896

ALWAYS USE

quick connect driver | 350mA

	CODE
6W	90213303
7W dim	90223301
14W DALI*	90243502

*revision opening required and
more options and specs on page 896

LOXONE VERSIONS ONLINE
weverducre.com/more-match-sneak

193
329 | 347
415 | 509
571
589 | 685
723 | 729

back




DESIGN AWARD 2023 · GOOD DESIGN · reddot winner 2023






MATCH stick

Ceiling recessed





1.0 TRIMLESS

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-90°|360° M-30° L80|50K

45-47 67 4-26

	CODE
	190951W_
	190951BL_
	190951B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	525	>90	3
3000K	555	>90	5

1.0

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-90°|360° M-30° L80|50K

40-41 67 4-26

	CODE
	190751W_
	190751BL_
	190751B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	525	>90	3
3000K	555	>90	5

ALWAYS USE

quick connect driver | 350mA

	CODE
6W	90213303
7W dim	90223301
14W DALI	90243502


revision opening required
more options and specs on page 896

ALWAYS USE

quick connect driver | 350mA

	CODE
6W	90213303
7W dim	90223301
14W DALI	90243502

revision opening required
more options and specs on page 896






LOXONE VERSIONS ONLINE
weverducre.com/more-match-stick

193
329 | 347
415 | 509
571
589 | 685
723 | 729

back

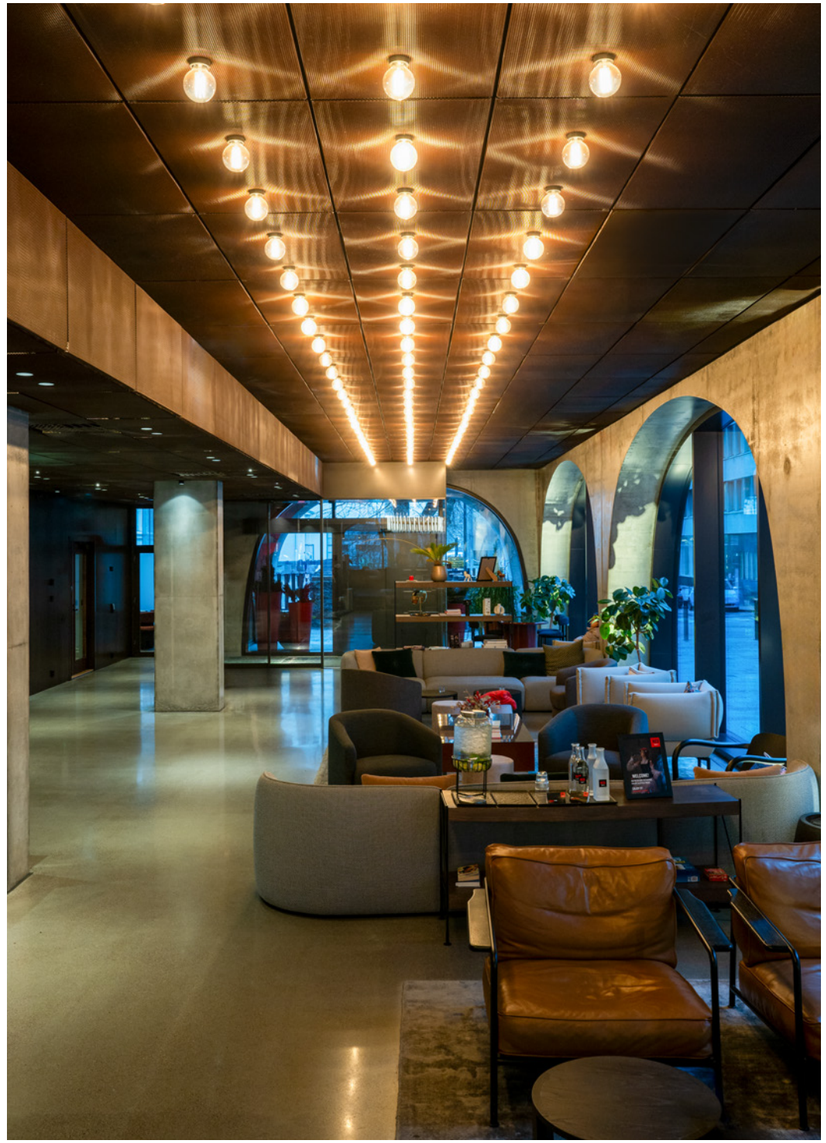

RADISSON RED | DESIGN AGENCY FYRA HELSINKI | FINLAND



RUVI

Ceiling recessed



1.0

G95 max. 12W | E27
220-240VAC | 50-60Hz
aluminium

IP20

54-56 90 7-33

	CODE
	1671E0B0

OPTIONAL

G95 5W/5.1W | E27 | phase-cut dim
gold mirror

	CODE
2200K | 370lm	9003E156
2700K | 410lm	9003E142

G95 5W | E27 | phase-cut dim
silver mirror

	CODE
2700K | 395lm	9003E157

G95 10W | E27 | phase-cut dim
ceramic soft look

	CODE
2700K | 1060lm	9003E163

G95 5.4W | E27 | phase-cut dim
gold tinted

	CODE
2200K | 380lm	9003E111

back

splash


THEY'RE FUN TO BATHE WITH

IP44 luminaires are perfectly protected against splashing water, while IP65 offers protection from water jets – ideal for bathrooms, showers, or spa areas. Slim models are great for limited space and low ceilings. And both protection classes come in many designs, not just spots.

IP44-Leuchten sind optimal vor Spritzwasser geschützt, IP65 sogar vor Wasserstrahlen – perfekt für Bad, Dusche oder SPA. Für wenig Platz eignen sich flache Modelle, die auch in niedrigen Räumen glänzen. Übrigens: Beide Schutzarten gibt es nicht nur als Spots, sondern in vielen weiteren Ausführungen.

weverducre.com/ip44

PLANO IP44	p. 151	MIRBI IP44	p. 297
MATCH point IP44	p. 153	TAIO IP65	p. 299
DEEP point IP44	p. 155	ROB IP44	p. 301
DEEP bijou IP65	p. 157	ROBY IP44	p. 303
DEEP petit IP65	p. 159	TOWNA IP44	p. 305
DEEP IP65 | IP44	p. 161	ROSS IP65	p. 307
DEEPER IP44	p. 163	HAJO IP44	p. 697
TAIO IP65	p. 165	PERLEZ IP44	p. 701
RINI SNEAK IP44	p. 167	PERLEZ CLIP IP44	p. 703
PERLEZ IP44	p. 169	MIRBA IP44	p. 705
MIRBI IP44	p. 171	MIRBI LONG IP44	p. 707
CITY IP44	p. 173	RIBELLE IP65	p. 709
PERLEZ IP44	p. 295	PAVIO IP65	p. 711

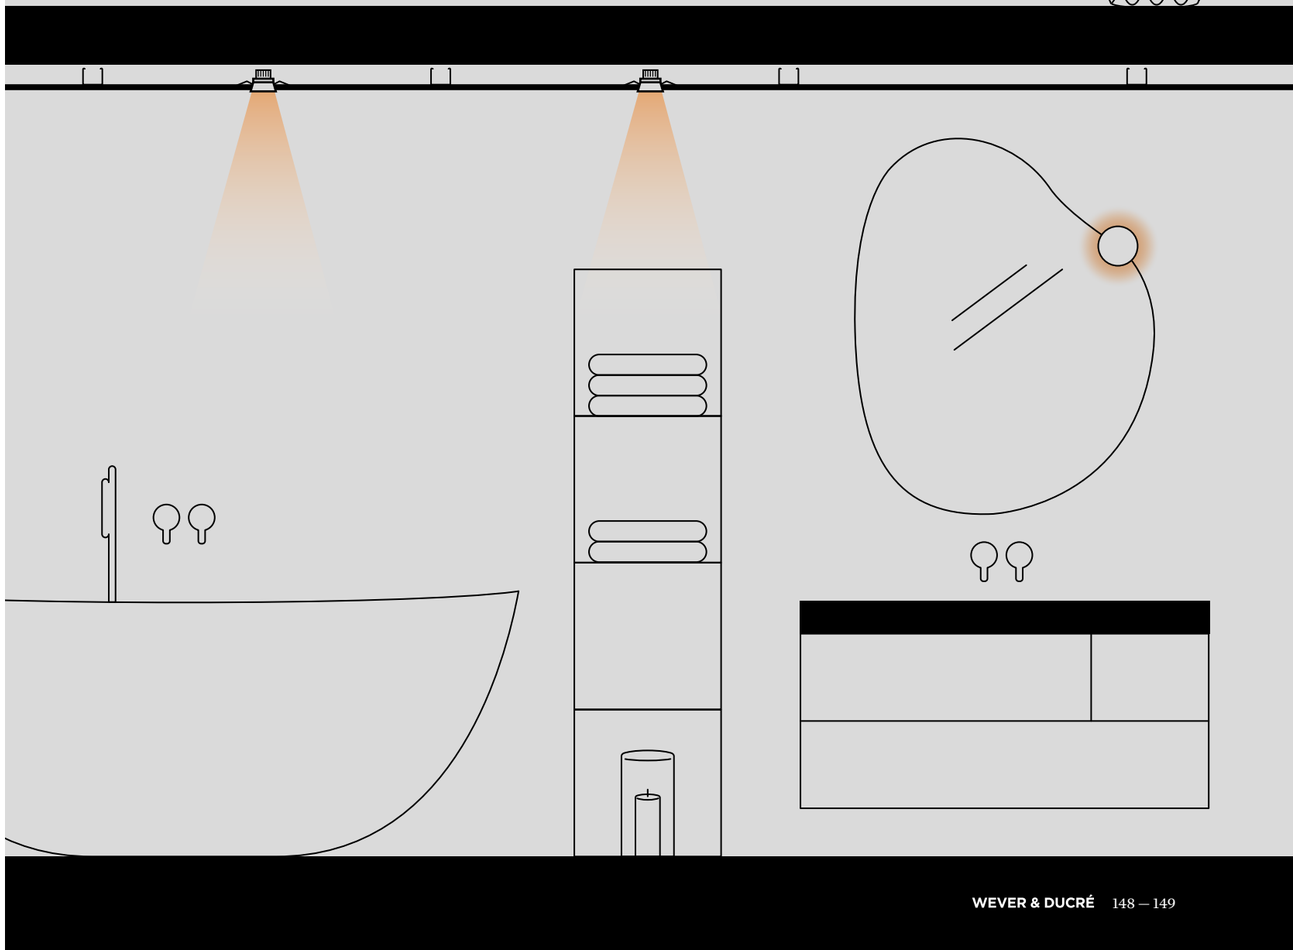





PRIVATE RESIDENCE | STUDIO BENOIT BELGIUM

PLANO IP44

Ceiling recessed

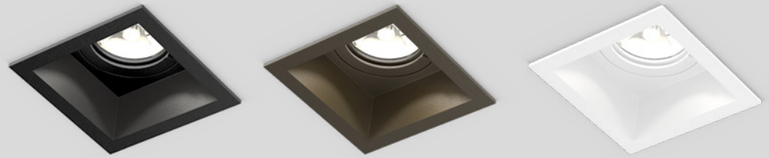





1.0 LED

LED COB 6/9W | 350/500mA | 17V
aluminium

IP44 M-34° L80|55K

wire springs 76x78 90 4-30

	CODE
	118861W_
	118861Q_
	118861B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	585/785	>90	3
3000K	615/830	>90	5
2000-3000K	430/635	>90	9

LED module 20 years replaceability

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP44

wire springs 74x78 130 4-30

	CODE
	118420W0
	118420Q0
	118420B0

ALWAYS USE

quick connect driver | 500mA

	CODE
10W | IP20	90214406
10W dim | IP20	90224403
15W DALI | IP20	90244501

more options and specs on page 898

OPTIONAL


PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905

MORE VERSIONS + LOXONE ONLINE
weverducre.com/more-plano-ip44


back

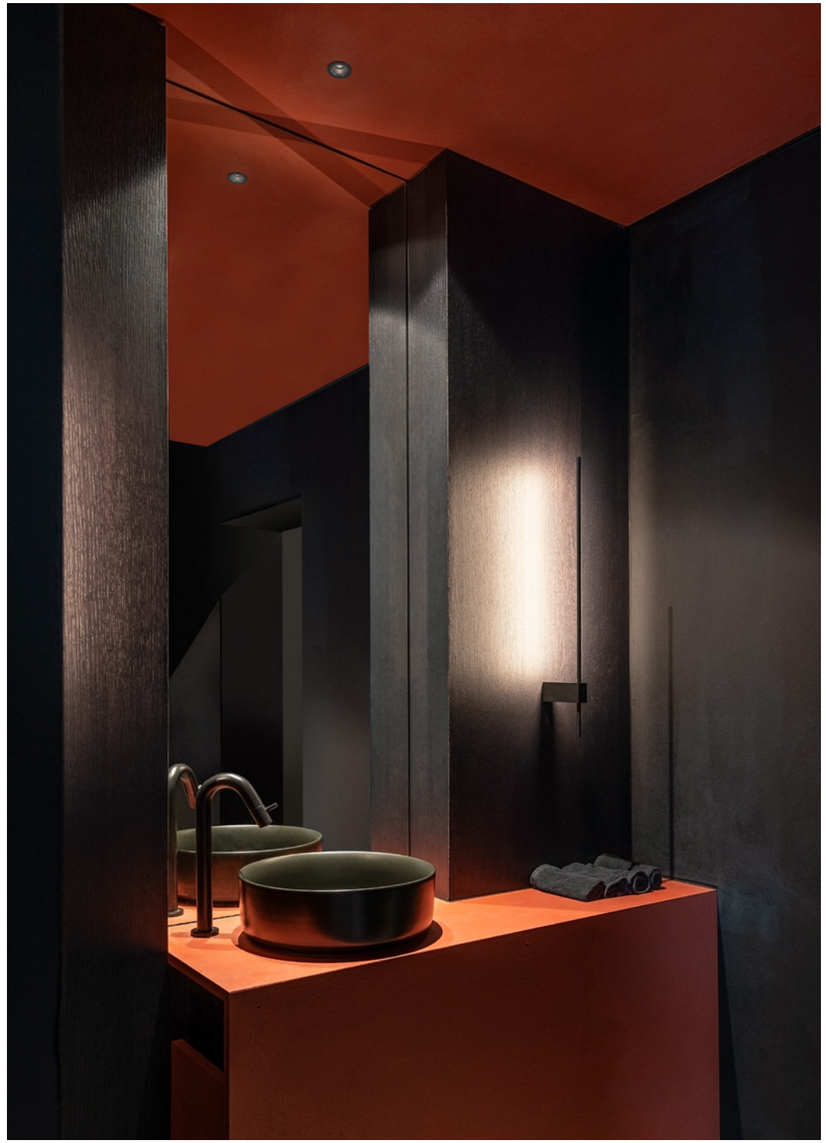

RESTAURANT OSAR | STEENHUYSE INTERIEURARCHITECTEN TIELT | BELGIUM

DESIGN AWARD 2023 · GOOD DESIGN · reddot winner 2023





MATCH point IP44

Ceiling recessed



42

ø45

1.0

LED COB 5W | 250mA | 17V
aluminium

IP44 M-32° L80|50K

wire springs 40-41 68 4-25

	CODE
	191261W_
	191261B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	295	>90	3
3000K	325	>90	5

ALWAYS USE

quick connect driver | 250mA

	CODE
5W dim | IP20	90226201
10W DALI | IP20*	90246403

*revision opening required
more options and specs on page 895

LOXONE VERSIONS ONLINE
weverducre.com/more-match-point

193
329 | 347
415 | 509
571
589 | 685
723 | 729


back




PRIVATE RESIDENCE | VLADIMIR MITROVIĆ SERBIA

DEEP point IP44

Ceiling recessed









1.0

LED COB 5W | 250mA | 17V
aluminium

IP44 M-32° L80|50K

wire springs 40-41 L68 4-25

	CODE
	185161W_
	185161Q_
	185161B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	355	>90	3
3000K	400	>90	5

ALWAYS USE

quick connect driver | 250mA

	CODE
5W dim | IP20	90226201
10W DALI | IP20*	90246403

*revision opening required
more options and specs on page 895

LOXONE VERSIONS ONLINE
weverducre.com/more-deep-point

IC rated


back



HOTEL MARTIN'S RENTMEESTERIJ | PCP ARCHITECTS BILZEN | BELGIUM

DEEP bijou IP65

Ceiling recessed





1.0

LED COB 4W | 500mA | 8V
aluminium

IP65 M-30° L80|55K

wire springs 50-52 85 4-25

	CODE
	165361W_
	165361Q_
	165361B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	470	>90	3
3000K	495	>90	5

ALWAYS USE

driver | 500mA

	CODE
6W | IP20	90214201
6.5W dim | IP20*	90224301
7W | IP67	90214301

*revision opening required
more drivers on page 898


MORE VERSIONS ONLINE
weverducre.com/more-deep-bijou-ip65




back









DEEP petit IP65

Ceiling recessed



1.0

LED COB 6W | 350mA | 17V
aluminium

IP65 M-31° L80|50K

wire springs 68-70 60 4-25

	CODE
	153761W_
	153761Q_
	153761B_


LIGHT COLOUR	LUMEN	CRI	CODE
2700K	590	>90	3
3000K	615	>90	5

ALWAYS USE

driver | 350mA

	CODE
6W | IP20	90213303
10W dim | IP20*	90223406
17W | IP68*	90213602

*revision opening required
more options and specs on page 896





back



LINK LAB CREATIVE OFFICES | STAY STUDIO KORTRIJK | BELGIUM

DEEP IP65 | IP44

Ceiling recessed







1.0 LED

LED COB 6/9W | 350/500mA | 17V
aluminium

IP65 M-33° L80|55K

wire springs 86-89 85 4-27

	CODE
	184161W_
	184161Q_
	184161B_

LIGHT COLOUR	LUMEN|CRI	CODE
2700K	480/660|>90	3
3000K	510/695|>90	5

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP44

wire springs 86-89 125 4-25

	CODE
	112620W0
	112620Q0
	112620B0

ALWAYS USE

driver | 500mA

	CODE
10W | IP20	90214406
10W dim | IP20	90224403
24W | IP68	90214702

more options and specs on page 898

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905

MORE VERSIONS + LOXONE ONLINE
weverducre.com/more-deep-ip44-65

1.0 LED
IC rated

745

back



HOTEL NOBIS | WINGÅRDHS COPENHAGEN | DENMARK

DEEPER IP44

Ceiling recessed







1.0 LED

LED COB 6/9W | 350/500mA | 17V
aluminium

IP44 M-34° L80|55K

wire springs 76-79 95 4-38

	CODE
	152461W_
	152461Q_
	152461B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	590/790	>90	3
3000K	620/835	>90	5
2000-3000K	440/650	>90	9

LED module 20 years replaceability

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP44

wire springs 76-79 130 4-38

	CODE
	152220W0
	152220Q0
	152220B0

ALWAYS USE

quick connect driver | 500mA

	CODE
10W | IP20	90214406
10W dim | IP20	90224403
15W DALI | IP20	90244501

more options and specs on page 898

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905

LOXONE VERSIONS ONLINE
weverducre.com/more-deeper



PRIVATE RESIDENCE | JOLIJN GEERAERTS INTERIEURARCHITECT BELGIUM









TAIO IP65

Ceiling recessed



1.0

LED COB 6/9W | 350/500mA | 17V
aluminium | opal glass convex lens

IP65 W-105° L80|55K

wire springs 70 80 4-27

	CODE
	180781W_
	180781G_
	180781Q_
	180781B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	375/515 | >90	3
3000K	390/535 | >90	5

ALWAYS USE

driver | 500mA

	CODE
10W | IP20	90214406
10W dim | IP20	90224403
24W | IP68	90214702

more options and specs on page 898

IC rated

back

299
747
757
803



PRIVATE RESIDENCE | AJ ARCHITECTEN BELGIUM

RINI SNEAK IP44

Ceiling recessed









1.0 LED

LED COB 6/9W | 350/500mA | 17V
aluminium

IP44 M-34° L80|55K

wire springs 76-79 52 4-25

	CODE
	154461W_
	154461B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	605/815	>90	3
3000K	640/860	>90	5
2000-3000K	450/665	>90	9

LED module 20 years replaceability

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP44

wire springs 76-79 85 4-25

	CODE
	154220W0
	154220B0

ALWAYS USE

quick connect driver | 500mA

	CODE
10W | IP20	90214406
10W dim | IP20	90224403
15W DALI | IP20	90244501

more options and specs on page 898


OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905

LOXONE VERSIONS ONLINE
weverducre.com/more-rini-sneak



back





PERLEZ IP44


Ceiling recessed

271 | 275 | 295

701







1.0

LED COB 6/9W | 350/500mA | 18V
aluminium | opal glass

IP44 L80|50K

wire springs 46-51 68 4-25

	CODE
	192181W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	520/705	>95	3
3000K	550/740	>95	5

2.0

LED COB 6/9W | 350/500mA | 18V
aluminium | opal glass

IP44 L80|50K

wire springs 46-51 68 4-25

	CODE
	192281W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	600/810	>95	3
3000K	630/850	>95	5

3.0

LED COB 6/9W | 350/500mA | 18V
aluminium | opal glass

IP44 L80|50K

wire springs 46-51 68 4-25

	CODE
	192381W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	645/875	>95	3
3000K	665/915	>95	5

IC rated

ALWAYS USE

quick connect driver | 350mA

	CODE
6W | IP20	90213303
7W dim | IP20	90223301
14W DALI*	90243502

*revision opening required

more options and specs on page 896

LOXONE VERSIONS ONLINE

weverducre.com/more-perlez-recessed

ALWAYS USE

quick connect driver | 350mA

	CODE
6W | IP20	90213303
7W dim | IP20	90223301
14W DALI*	90243502

*revision opening required

more options and specs on page 896

ALWAYS USE

quick connect driver | 350mA

	CODE
6W | IP20	90213303
7W dim | IP20	90223301
14W DALI*	90243502

*revision opening required

more options and specs on page 896


back



MIRBI IP44

Ceiling recessed









297



707









1.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz
clear + opal PMMA cover

IP44 L80|60K

blade springs 76-79 50 min. 8

3000K | CRI >90 | 640lm

CODE
175688W5

2.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz
clear + opal PMMA cover

IP44 L80|60K

blade springs 72x72 50 min. 8

3000K | CRI >90 | 640lm

CODE
175788W5

back



DENTAL PRACTICE TANDKORAAL | G4A ARCHITECTEN BRUGGE | BELGIUM

CITY IP44

Ceiling recessed





ø210



ø305

1.6

LED PCB 13W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA cover

IP44 L80|60K

wire springs 202-205 50 4-22

3000K | CRI >90 | 1170lm

	CODE
	115488W5
	115488B5

2.6


LED PCB 19W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA cover

IP44 L80|60K

wire springs 297-300 50 4-22

3000K | CRI >90 | 1740lm

	CODE
	115588W5
	115588B5



back

Ceiling surface

SPOT LIGHTS



QITO
177



BLIEK PETIT
179



CENO
181



LECA
189



MATCH
193



MATCH 4.0
197



MICK
199

PILLO
201



SARA ON BASE
203



SQUBE ON BASE
205

DOWN LIGHTS



LINOO
211



PIRRO PETIT
213



PIRRO
215



PIRRO OPAL
221



PIRRO ON BASE
223



PLANO PETIT
227



SIRRO
229



BOX MINI LED
231



BOX MINI PAR16
233



BOX
235



DOCUS MINI
239



DOCUS
241



HEXO MINI
243



HEXO
245



RAY MINI LED
247



RAY MINI PAR16
249



RAY
251



SOLID BIJOU
253



SOLID PETIT
255



SOLID
257



TRACE
261

LUMINAIRES

FINLIN
263



FIL SPIN
267



TRACE SPIN
269




PERLEZ SPIN
271



TRACE GRID
273



PERLEZ GRID
275



VENN
277



DRO
279



MIRRO
283

MIRRO SOFT
285

CLEA
287

J.J.W.
289

WIRO
291

ROOMOR OFFICE
293

IP-RATED

PERLEZ IP44
295

MIRBI IP44 1.0
297

MIRBI IP44 2.0
297

TAIO IP65
299

ROB IP44
301

ROBY IP44
303

TOWNA IP44
305

ROSS IP54
307


back



QITO

Ceiling surface





2.0

LED COB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-35°|350° M-31° L80|50K

	CODE
	198664W_
	198664L_
	198664Q_
	198664B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x420	>90	3
3000K	2x440	>90	5



OPTIONAL

honeycomb louver

	CODE
	915230B0


back




reddot winner 2023

BLIEK petit

Ceiling surface

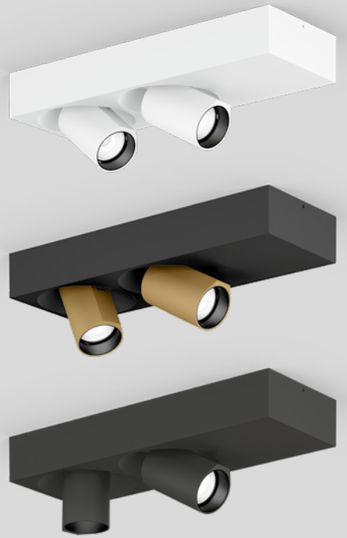



2.0

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-60°|355° M-31° L70|55K

	CODE
	164664W_
	164664CH_
	164664B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x490	>90	3
3000K	2x510	>90	5
2000-3000K	2x340	>90	9



OPTIONAL

honeycomb louver

	CODE
	915230B0

back



PRIVATE RESIDENCE | VERFAILLIE INTERIEUR BELGIUM

CENO

Ceiling surface

131
321
585







1.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-90°|350° M-31° L70|55K

	CODE
	176664W_
	176664Q_
	176664K_
	176664B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	520	>90	3
3000K	540	>90	5

2.0

LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-90°|350° M-31° L70|55K

	CODE
	176764W_
	176764Q_
	176764K_
	176764B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x480	>90	3
3000K	2x525	>90	5



OPTIONAL

honeycomb louver

	CODE
	915230B0

LOXONE VERSIONS ONLINE
weverducre.com/more-ceno-surface

back


MARRAKECH FLAIR


CENO


Ceiling surface

131
321
585









4.0

LED COB 30W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-90°|350° M-31° L70|55K

	CODE
	176864W_
	176864Q_
	176864K_
	176864B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	4x510	>90	3
3000K	4x530	>90	5

4.1

LED COB 30W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-90°|350° M-31° L70|55K

	CODE
	176964W_
	176964Q_
	176964K_
	176964B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	4x510	>90	3
3000K	4x530	>90	5



OPTIONAL

honeycomb louver

	CODE
	915230B0

back




PRIVATE RESIDENCE | STEENOVEN | B2A | BELGIUM

CENO

Ceiling surface





6.0

LED COB 41W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-90°|350° M-31° L70|55K

honeycomb

OPTIONAL

honeycomb louver

	CODE
	915230B0

	CODE
	176064W_
	176064Q_
	176064B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	6x480	>90	3
3000K	6x525	>90	5

back



reddot winner 2024


LECA

Ceiling surface


135


325

569

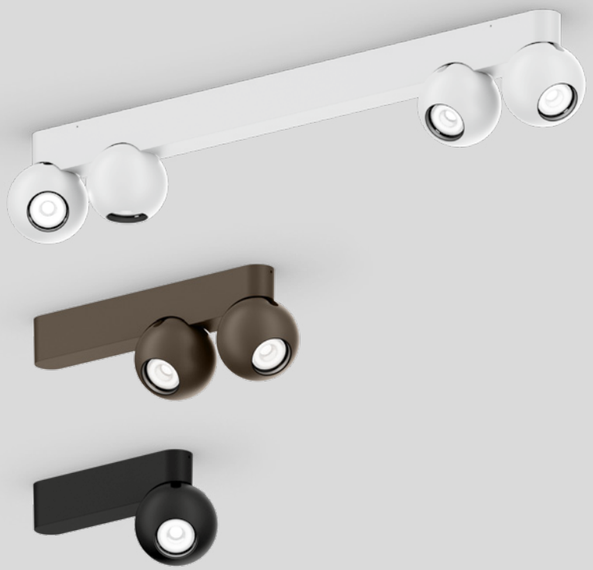







honeycomb

OPTIONAL

honeycomb louver

	CODE
	915230B0

1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-90°|350° M-31° L80|50K

2700K | CRI >90 | 585lm

	CODE
	188264W3
	188264Q3
	188264B3

2.0

LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-90°|350° M-31° L80|50K

2700K | CRI >90 | 2x585lm

	CODE
	188364W3
	188364Q3
	188364B3

4.0

LED COB 28W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-90°|350° M-31° L80|50K

2700K | CRI >90 | 4x585lm

	CODE
	188464W3
	188464B3

back






PRIVATE RESIDENCE | AJ ARCHITECTEN BELGIUM

MATCH

Ceiling surface 61 | 137 | 153








329 | 347


415 | 509

571

589 | 685

723 | 729





1.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-90°|350° M-30°L80|50K

	CODE
	177154W_
	177154BL_
	177154B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	550	>90	3
3000K	580	>90	5

2.0

LED COB 18W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-90°|350° M-30° L80|50K

	CODE
	177254W_
	177254BL_
	177254B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x545	>90	3
3000K	2x550	>90	5

LOXONE VERSIONS ONLINE
weverducre.com/more-match-surface

back







MATCH

Ceiling surface 61 | 137 | 153


329 | 347

415 | 509

571

589 | 685

723 | 729



4.0


LED COB 29W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-90°|350° M-30° L80|50K

	CODE
	177454W_
	177454B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	4x490	>90	3
3000K	4x495	>90	5

back

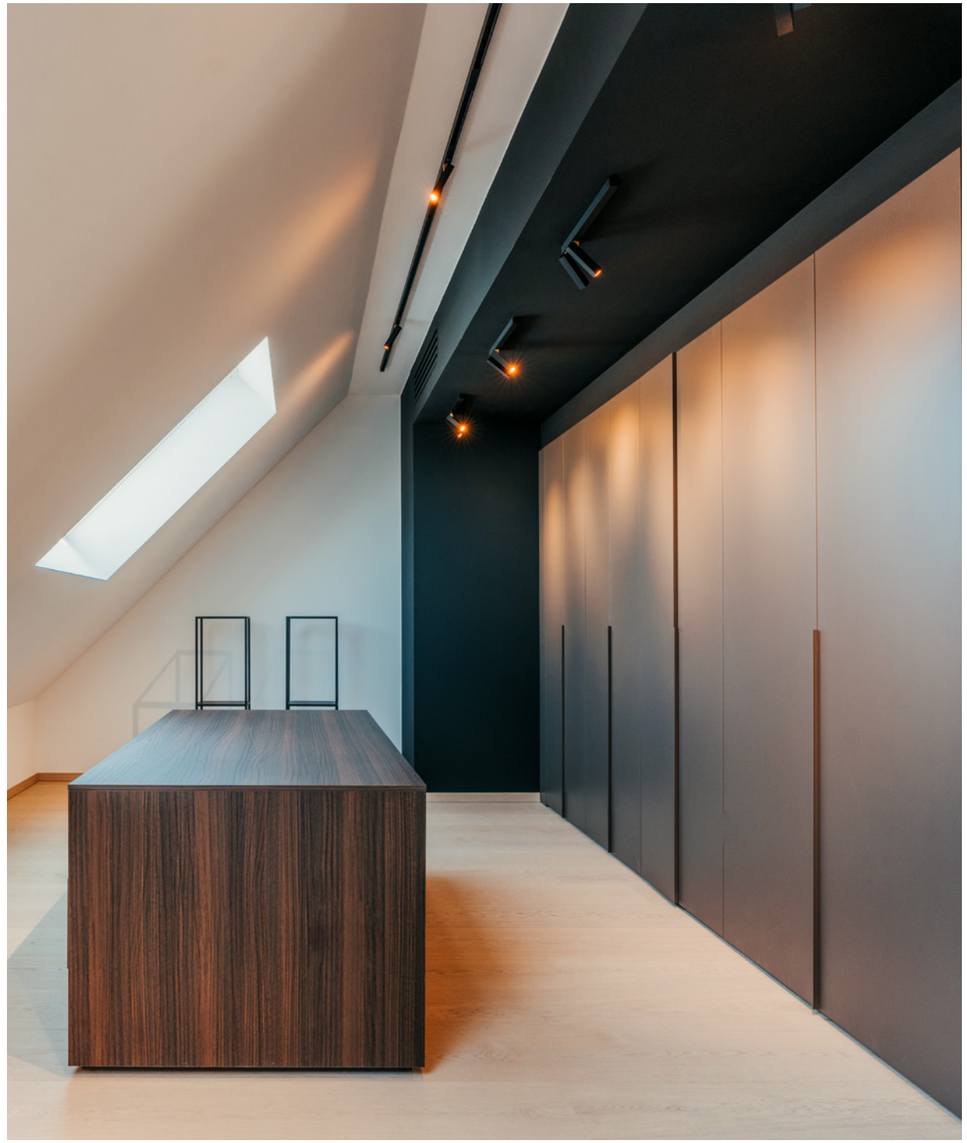


PRIVATE RESIDENCE | AXIOME ARCHITECTURE BELGIUM


MICK


Ceiling surface


333

687 | 691

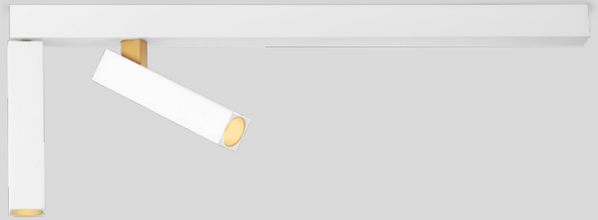

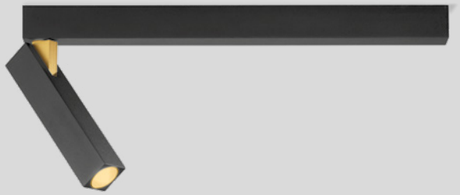





1.0

LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-90°|350° M-23° L80|50K

	CODE
	159144J_
	159144K_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	410	>90	3
3000K	435	>90	5

2.0

LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-90°|350° M-23° L80|50K

	CODE
	159244J_
	159244K_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x215	>90	3
3000K	2x225	>90	5

S&R CORNELISSEN

back





PILLO

Ceiling surface









1.0

PAR11 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-90°|350°

	CODE
	194120W0
	194120B0

2.0

2x PAR11 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-90°|350°

	CODE
	194220W0
	194220B0

OPTIONAL

PAR11 4.3W | GU10 | phase-cut dim

	CODE
2700K | 225lm	901128B3
3000K | 235lm	901128B5

OPTIONAL

PAR11 4.3W | GU10 | phase-cut dim

	CODE
2700K | 225lm	901128B3
3000K | 235lm	901128B5

363

back





MARBELLA DESIGN & ART FAIR | MARISA GALLO | INTERIORISMO STUDIO MARBELLA | SPAIN


SARA on base

Ceiling surface









1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-90°

	CODE
	157220W0
	157220G0
	157220K0
	157220B0

1.1

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-90°|330°

	CODE
	157420W0
	157420B0

3.0

3x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-90°|330°

	CODE
	157520W0
	157520B0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905

365

689

back



PRIVATE RESIDENCE | AGENCE VERONIQUE COTREL FRANCE

SQUBE on base

Ceiling surface











1.0 LED

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP20 0°-90° M-39° L70|55K

	CODE
	144268W_
	144268B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	400	>90	3
3000K	445	>90	5
1800-3000K	350	>80	9

1.1 LED

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP20 0°-90° M-32° L70|55K

	CODE
	144468W_
	144468B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	925	>90	3
3000K	960	>90	5
1800-3000K	645	>80	9

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-90°

	CODE
	144220W0
	144220B0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905


black ring LED


PAR16

back








PRIVATE RESIDENCE | LANCO DESIGN BELGIUM


SQUBE on base

Ceiling surface









2.0

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-90°|355°

	CODE
	144520W0
	144520B0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905

3.0

3x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-90°|355°

	CODE
	144620W0
	144620B0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5


more lamps and info on page 905





LINOO

Ceiling surface









4.0

LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | polycarbonate
light colour selectable via dip switch

IP20 M-39° L80|50K

2700K/3000K | CRI >90 | 4x125lm

	CODE
	109664WW9
	109664WB9
	109664QB9
	109664BB9

4.1

LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | polycarbonate
light colour selectable via dip switch

IP20 M-39° L80|50K

2700K/3000K | CRI >90 | 4x125lm

	CODE
	109764WW9
	109764WB9
	109764QB9
	109764BB9

8.0

LED PCB 19W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | polycarbonate
light colour selectable via dip switch

IP20 M-39° L80|50K

2700K/3000K | CRI >90 | 8x125lm

	CODE
	109864WW9
	109864WB9
	109864QB9
	109864BB9

UGR ≤ 16
65°≤ 3000cd

2700K – 3000K
adjustment
switch


back





PRIVATE RESIDENCE | IN-LIJN INTERIEURARCHITECTUUR BELGIUM

PIRRO petit

Ceiling surface

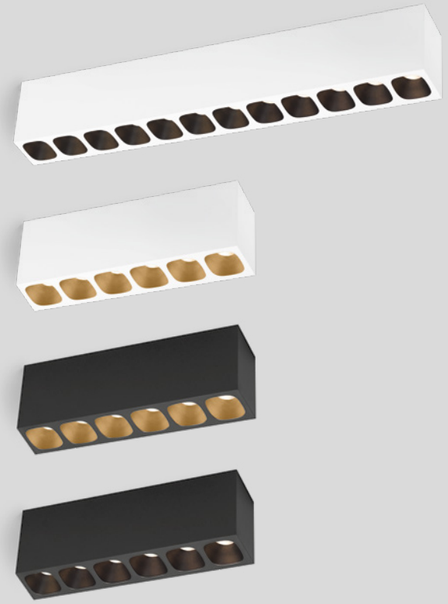





6.0

LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-28° L80|50K

	CODE
	129854E_
	129854WM_
	129854CH_
	129854B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	6x160	>90	3
3000K	6x165	>90	5

12.0

LED COB 27W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-28° L80|50K

	CODE
	129954E_
	129954WM_
	129954CH_
	129954B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	12x160	>90	3
3000K	12x165	>90	5


back




PIRRO

Ceiling surface







1.0

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-32° L70|55K

	CODE
	151164E_
	151164J_
	151164K_
	151164B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	355	>90	3
3000K	385	>90	5

4.1

LED COB 20W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-32° L70|55K

	CODE
	151564E_
	151564J_
	151564K_
	151564B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	4x365	>90	3
3000K	4x380	>90	5



OPTIONAL

honeycomb louver

	CODE
	915230B0

back









PRIVATE RESIDENCE | PADRON LUXURY LIVING BY POTRELL BELGIUM


PIRRO


Ceiling surface



75




371

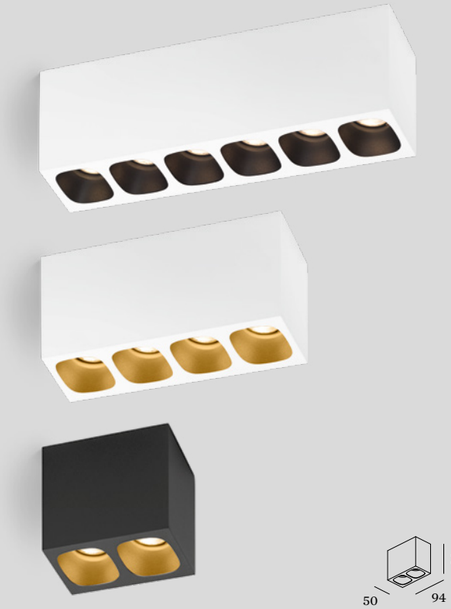





2.0

LED COB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-32° L70|55K

	CODE
	151264E_
	151264J_
	151264K_
	151264B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x355	>90	3
3000K	2x385	>90	5

4.0

LED COB 20W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-32° L70|55K

	CODE
	151464E_
	151464J_
	151464K_
	151464B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	4x365	>90	3
3000K	4x380	>90	5

6.0

LED COB 21W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-32° L70|55K

	CODE
	151664E_
	151664J_
	151664K_
	151664B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	6x330	>90	3
3000K	6x350	>90	5




OPTIONAL

honeycomb louver

	CODE
	915230B0

back



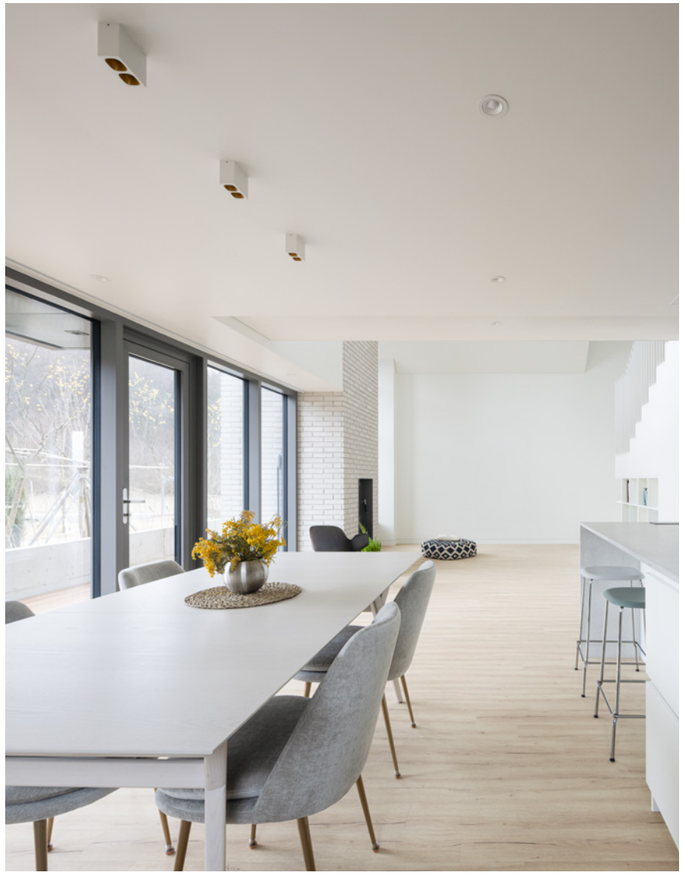






PRIVATE RESIDENCE | ORANEN & TURKLIN FINLAND

PIRRO OPAL

Ceiling surface

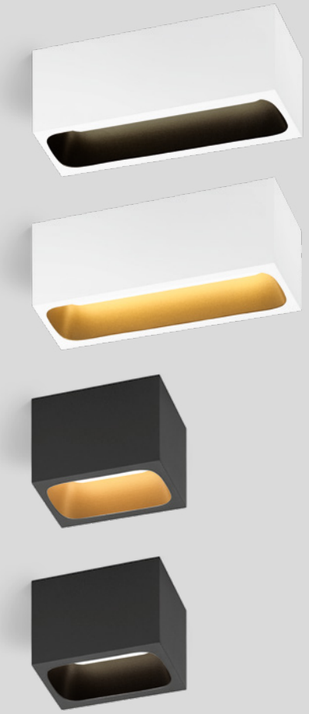





2.0

LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA cover

IP20 L80|60K

	CODE
	151284E_
	151284J_
	151284K_
	151284B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	270	>90	3
3000K	280	>90	5

4.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA cover

IP20 L80|60K

	CODE
	151484E_
	151484J_
	151484K_
	151484B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	685	>90	3
3000K	710	>90	5



back





PRIVATE RESIDENCE | PADRON LUXURY LIVING BY POTRELL BELGIUM


PIRRO on base

Ceiling surface













OPTIONAL

honeycomb louver

	CODE
	915230B0

2.2

LED COB 22W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PC lens and reflector

IP20 M-32° L70|55K

	CODE
	173564WWB_
	173564WWG_
	173564BBG_
	173564BBB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	4x360	>90	3
3000K	4x380	>90	5

4.2

LED COB 31W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PC lens and reflector

IP20 M-32° L70|55K

	CODE
	173664WWB_
	173664WWG_
	173664BBG_
	173664BBB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	6x360	>90	3
3000K	6x380	>90	5

4.4

LED COB 40W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PC lens and reflector

IP20 M-32° L70|55K

	CODE
	173764WWB_
	173764WWG_
	173764BBG_
	173764BBB_


LIGHT COLOUR	LUMEN	CRI	CODE
2700K	8x360	>90	3
3000K	8x380	>90	5

back



PIRRO on base


Ceiling surface

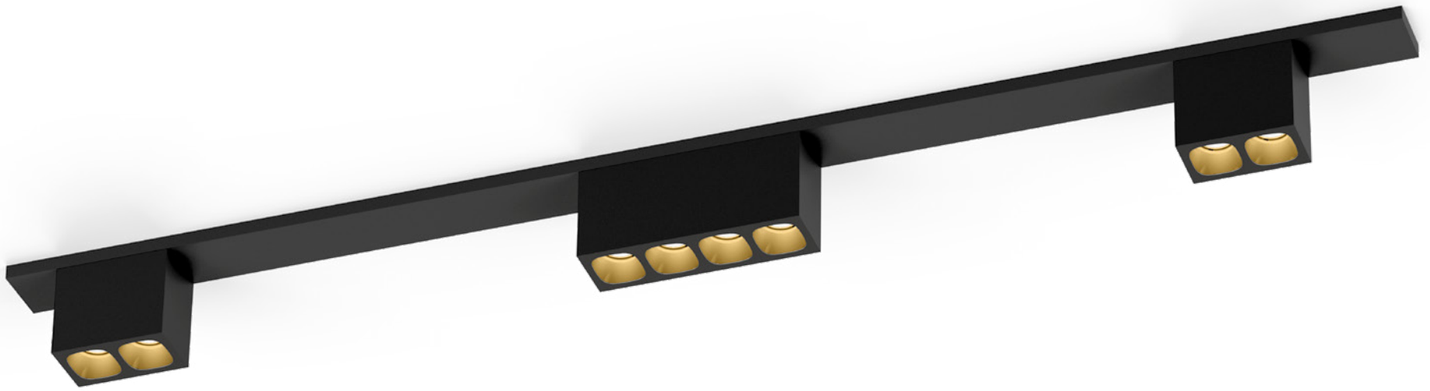












2.4.2

LED COB 42W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PC lens and reflector

IP20 M-32° L70|55K

	CODE
	173864WWB_
	173864WWG_
	173864BBG_
	173864BBB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	8x360	>90	3
3000K	8x380	>90	5


4.2.2

LED COB 42W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PC lens and reflector

IP20 M-32° L70|55K

	CODE
	173964WWB_
	173964WWG_
	173964BBG_
	173964BBB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	8x360	>90	3
3000K	8x380	>90	5





OPTIONAL

honeycomb louver

	CODE
	915230B0


PRIVATE RESIDENCE | HUIS CREEMERS BELGIUM

back





PLANO petit


Ceiling surface














1.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-25°|355° M-31° L70|55K

	CODE
	162864WW_
	162864WB_
	162864BM_
	162864BB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	550	>90	3
3000K	580	>90	5

LED module 20 years replaceability

2.0

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-25°|355° M-31° L70|55K

	CODE
	162964WW_
	162964WB_
	162964BM_
	162964BB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x550	>90	3
3000K	2x580	>90	5

LED module 20 years replaceability

3.0

LED COB 23W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-25°|355° M-31° L70|55K

	CODE
	162764WW_
	162764WB_
	162764BM_
	162764BB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	3x540	>90	3
3000K	3x570	>90	5

LED module 20 years replaceability

MORE VERSIONS + LOXONE ONLINE
weverducre.com/more-plano-surface

back




DEUTSCHE WOHNWERTE | BRANDHERM + KRUMREY HAMBURG HEIDELBERG | GERMANY


SIRRO


Ceiling surface











1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-35°|355°

	CODE
	139120W0
	139120E0
	139120B0

2.0

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-35°|355°

	CODE
	139220W0
	139220E0
	139220B0

3.0

3x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-35°|355°

	CODE
	139320W0
	139320E0
	139320B0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905

OPTIONAL


PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905

LOXONE VERSIONS ONLINE
weverducre.com/more-sirro

back


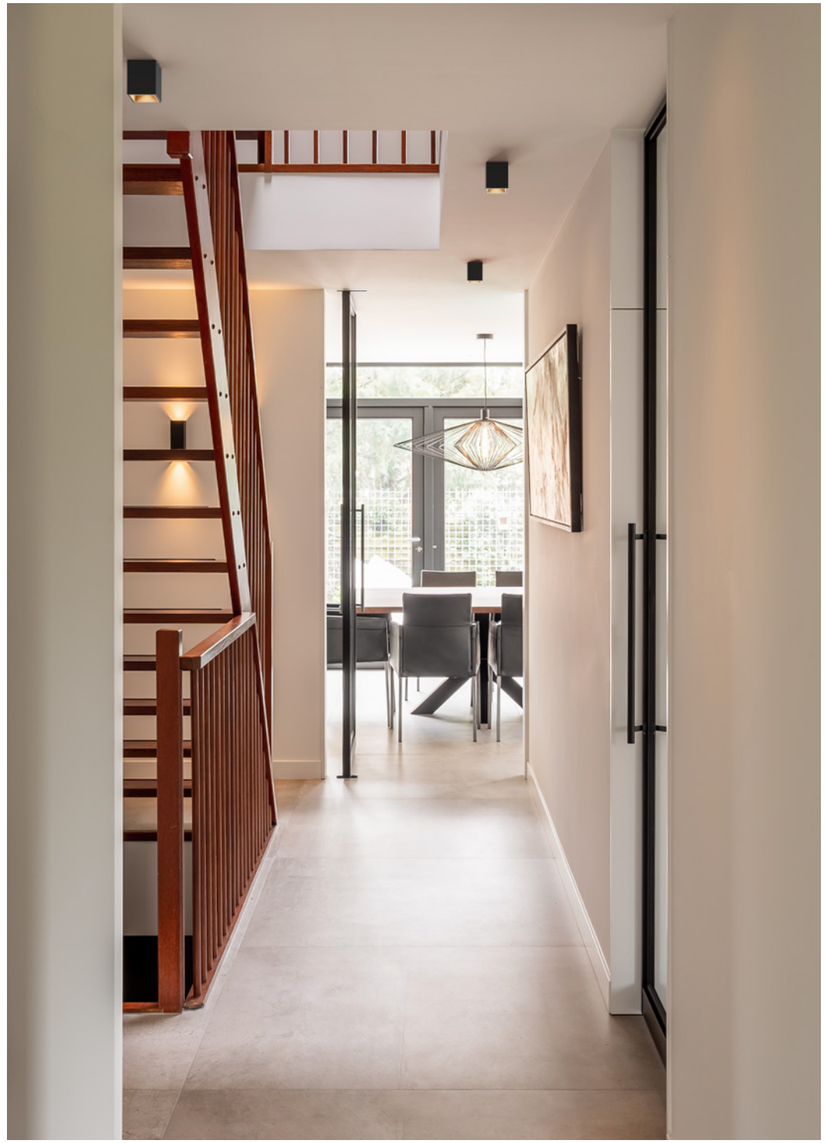



PRIVATE RESIDENCE | JACO GOUDRIAAN THE NETHERLANDS

BOX mini

Ceiling surface





1.0 LED

LED COB 7W | phase-cut dim
220-240VAC | 50-60Hz
incl. driver | aluminium

IP20 M-30° L80|55K




















CODE
258154WW_
258154WM_
258154WB_
258154MM_
258154MB_
258154BM_
258154QQ_
258154BB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	470	>90	3
3000K	500	>90	5


LOXONE VERSIONS ONLINE
weverducre.com/more-box-mini

back

BOX mini

Ceiling surface





605

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

	CODE
	258120W0
	258120G0
	258120M0
	258120Q0
	258120B0



OPTIONAL

inner reflector max. 10W
polycarbonate

	CODE
	900199W1
	900199G1
	900199M1
	900199Q1
	900199B1

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905


back



OFFICE INNARGI COPENHAGEN | HELLE FLOU COPENHAGEN | DENMARK

BOX


Ceiling surface














1.0 LED

LED COB 8W | dimmable
220-240VAC | 50-60Hz
aluminium

IP20 M-21° L70|50K

phase-cut dim

	CODE
	186158W_
	186158L_
	186158G_
	186158M_
	186158Q_
	186158B_

DALI

	CODE
	186159W_
	186159L_
	186159G_
	186159M_
	186159Q_
	186159B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	600 | >90	3
3000K	620 | >90	5
2000-3000K*	415 | >90	9

*only for phase-cut dim


1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

	CODE
	146120W0
	146120L0
	146120G0
	146120M0
	146120Q0
	146120B0





OPTIONAL

inner reflector max. 10W
polycarbonate

	CODE
	911211W1
	911211G1
	911211M1
	911211B1

inner cover max. 10W
aluminium

	CODE
	911011W1
	911011G1
	911011M1
	911011B1

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905

back

335
607
765
815





PRIVATE RESIDENCE | DECOFORM BELGIUM


BOX

Ceiling surface













OPTIONAL

double inner reflector max. 10W
polycarbonate

	CODE
	911251W1
	911251G1
	911251M1
	911251B1

inner cover max. 10W
aluminium | 2 pieces needed

	CODE
	911011W1
	911011G1
	911011M1
	911011B1

2.0 LED

LED COB 16W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP20 M-21° L70|50K

	CODE
	186258W_
	186258L_
	186258G_
	186258M_
	186258Q_
	186258B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x600	>90	3
3000K	2x620	>90	5
2000-3000K	2x415	>90	9

2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

	CODE
	146220W0
	146220L0
	146220G0
	146220M0
	146220Q0
	146220B0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905


335
607
765
815
back




OFFICE INARTO | INARTO ARCHITECTEN HERENTALS | BELGIUM

DOCUS mini

Ceiling surface

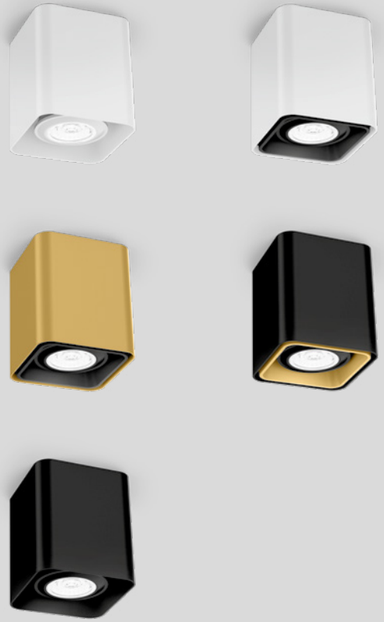



1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

	CODE
	258320W0
	258320G0
	258320B0



OPTIONAL

inner reflector max. 10W
polycarbonate

	CODE
	900199W2
	900199G2
	900199B2

OPTIONAL


PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905

609

back

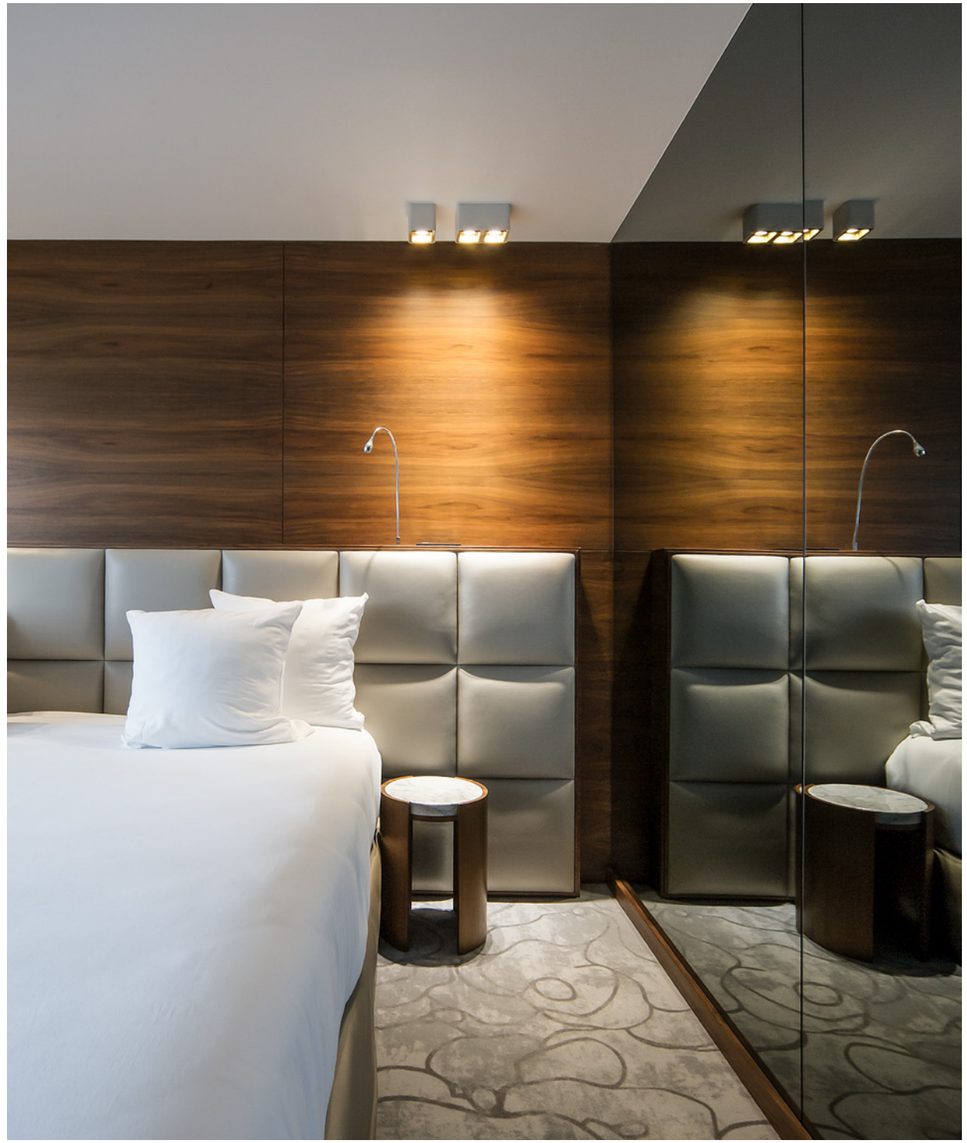

HOTEL HOWARD | ROQUE INTÉRIEURS PARIS | FRANCE


DOCUS


Ceiling surface














1.0 LED

LED COB 8W | dimmable
220-240VAC | 50-60Hz
aluminium

IP20 M-21° L70|50K

phase-cut dim

	CODE
	186358W_
	186358G_
	186358B_

DALI

	CODE
	186359W_
	186359G_
	186359B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	610	>90	3
3000K	630	>90	5
2000-3000K*	420	>90	9

*only for phase-cut dim

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

	CODE
	146320W0
	146320G0
	146320B0

2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

	CODE
	146420W0
	146420G0
	146420B0



OPTIONAL

inner cover max. 10W
aluminium | **2.0** 2 pieces needed

	CODE
	911021W1
	911021G1
	911021B1

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905


OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905

back

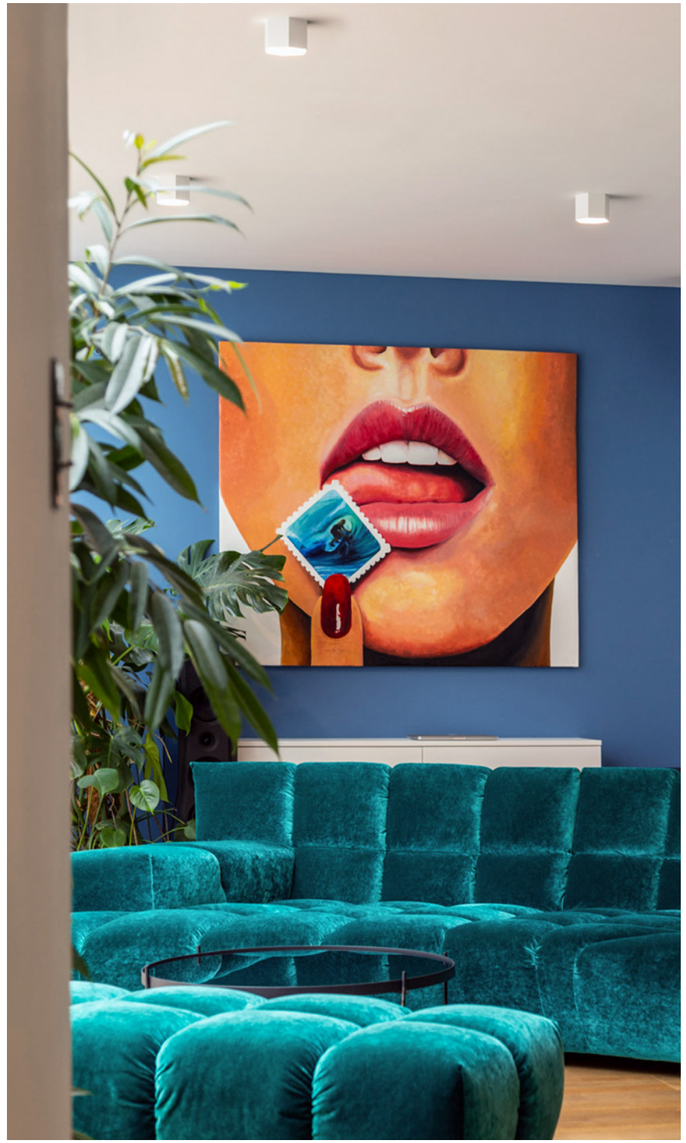

PRIVATE RESIDENCE | TOM BEIGE / *NESS HUNGARY

HEXO mini

Ceiling surface










375 | 391


505 | 531


611

1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

CODE

	258420W0
	258420G0
	258420Q0
	258420B0



OPTIONAL

inner reflector max. 10W
polycarbonate

CODE

	900199W3
	900199G3
	900199Q3
	900199B3

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

CODE

2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905

back



PRIVATE RESIDENCE | **CONCEPT'N** BELGIUM

HEXO

Ceiling surface














1.0 LED

LED COB 8W | dimmable
220-240VAC | 50-60Hz
aluminium

IP20 M-21° L70|50K

phase-cut dim

	CODE
	186558W_
	186558G_
	186558Q_
	186558P_
	186558B_

DALI

	CODE
	186559W_
	186559G_
	186559Q_
	186559P_
	186559B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	670	>90	3
3000K	700	>90	5
2000-3000K*	470	>90	9

*only for phase-cut dim

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

	CODE
	146520W0
	146520G0
	146520Q0
	146520P0
	146520B0

2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

	CODE
	146620W0
	146620G0
	146620Q0
	146620P0
	146620B0



OPTIONAL

inner cover max. 10W
aluminium | **2.0** 2 pieces needed

	CODE
	911031W1
	911031G1
	911031B1

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905

back



PRIVATE RESIDENCE | SYNOPSIS ARCHITECTURE BELGIUM

RAY mini

Ceiling surface





375 | 391



507 | 535



613



85

ø70

1.0 LED

LED COB 7W | phase-cut dim
220-240VAC | 50-60Hz
incl. driver | aluminium

IP20 M-30° L80|55K

	CODE
	258254WW_
	258254WM_
	258254WB_
	258254MM_
	258254MB_
	258254BM_
	258254QQ_
	258254BB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	450	>90	3
3000K	480	>90	5




WW




WM



WB



MM



MB



QQ



BM



BB

LOXONE VERSIONS ONLINE
weverducre.com/more-ray-mini


back



HOTEL MARTIN'S RENTMEESTERIJ | PCP ARCHITECTS BILZEN | BELGIUM

RAY mini

Ceiling surface

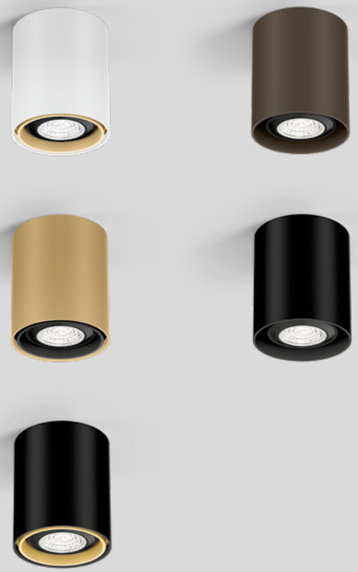



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

CODE
258220W0
258220G0
258220M0
258220Q0
258220B0



OPTIONAL

inner reflector max. 10W
polycarbonate

CODE
900199W4
900199G4
900199M4
900199Q4
900199B4

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905

back





MAISONME BOUTIQUE HOTEL | ALICE PIUBELLO BARDOLINO LAKE GARDA | ITALY

RAY

Ceiling surface













1.0 LED

LED COB 8W | dimmable
220-240VAC | 50-60Hz
aluminium

IP20 M-21° L70|50K

phase-cut dim

	CODE
	186758W_
	186758L_
	186758G_
	186758M_
	186758Q_
	186758P_
	186758B_

DALI

	CODE
	186759W_
	186759L_
	186759G_
	186759M_
	186759Q_
	186759P_
	186759B_

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

	CODE
	146720W0
	146720L0
	146720G0
	146720M0
	146720Q0
	146720P0
	146720B0

OPTIONAL

inner cover max. 10W
aluminium

	CODE
	911041W1
	911041G1
	911041M1
	911041B1

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	670 | >90	3
3000K	700 | >90	5
2000-3000K*	470 | >90	9

*only for phase-cut dim

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905


back


341 | 377 | 393
537
615
759
805

PRIVATE RESIDENCE | AGENCE VÉRONIQUE COTRE, FRANCE

SOLID bijou

Ceiling surface

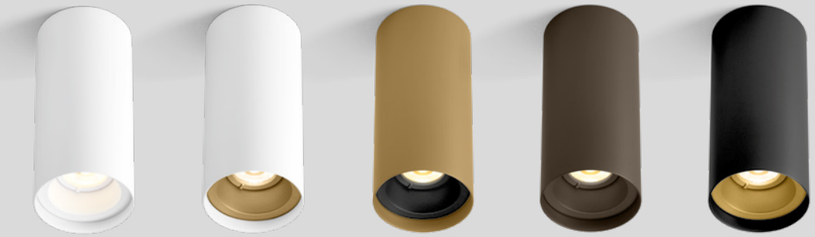



1.0

LED COB 6W | phase-cut dim
220-240V | 50-60Hz | incl. driver
aluminium

IP20 M-27° L80|50K

	CODE
	133864WW_
	133864WG_
	133864MB_
	133864BG_
	133864BM_
	133864QQ_
	133864BB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	480	>90	3
3000K	510	>90	5

LOXONE VERSIONS ONLINE
weverducre.com/more-solid-bijou

back



PRIVATE RESIDENCE | ELLEMVIE - ART & INTERIEUR THE NETHERLANDS

SOLID petit

Ceiling surface





2.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-25°|355° M-31° L80|50K



	CODE
	133964WW_
	133964WG_
	133964MB_
	133964BG_
	133964BM_
	133964SG_
	133964ME_
	133964QQ_
	133964BB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	555	>90	3
3000K	585	>90	5
2000-3000K	470	>90	9

LED module 20 years replaceability

MORE VERSIONS + LOXONE ONLINE
weverducre.com/more-solid-petit

back



PRIVATE RESIDENCE | STUDIO ZUYD THE NETHERLANDS

SOLID

Ceiling surface







1.0 LED

LED COB 13W | dimmable
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-25°|355° M-34° L80|55K

phase-cut dim

	CODE
	133764WW_
	133764WG_
	133764MB_
	133764BG_
	133764BM_
	133764QQ_
	133764BB_

DALI-2 | push dim


	CODE
	133765WW_
	133765WG_
	133765MB_
	133765BG_
	133765BM_
	133765QQ_
	133765BB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	855	>90	3
3000K	905	>90	5
2000-3000K	695	>90	9

LED module 20 years replaceability















MORE VERSIONS + LOXONE ONLINE
weverducre.com/more-solid

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-25°|355°

	CODE
	133120WW0
	133120WG0
	133120MB0
	133120BG0
	133120BM0
	133120QQ0
	133120BB0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905

back








PRIVATE RESIDENCE | STUDIO FOOLEN THE NETHERLANDS

DESIGN AWARD 2024

reddot winner 2023

TRACE

Ceiling surface

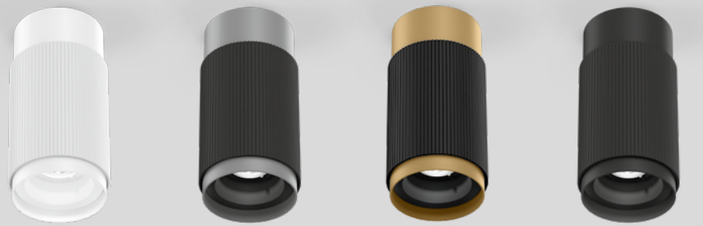





351



511 | 547



593



130

ø65

1.0

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-27° L80|50K

	CODE
	183164W_
	183164BL_
	183164CH_
	183164B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	480	>90	3
3000K	510	>90	5

back



PRIVATE RESIDENCE GREECE


DESIGN AWARD 2024

reddot winner 2023

FINLIN

Ceiling surface





1.0

LED PCB 5W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser

IP20 L80|50K

	CODE
	174184W_
	174184CH_
	174184B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	450	>90	3
3000K	485	>90	5



2.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser

IP20 L80|50K

	CODE
	174284W_
	174284CH_
	174284B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	675	>90	3
3000K	730	>90	5



3.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser

IP20 L80|50K

	CODE
	174384W_
	174384CH_
	174384B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	900	>90	3
3000K	975	>90	5

OPTIONAL

cover plate adapter for concrete housing

	CODE
	900194B0

433
673 | 679
727

back






reddot winner 2024


FIL SPIN

Ceiling surface

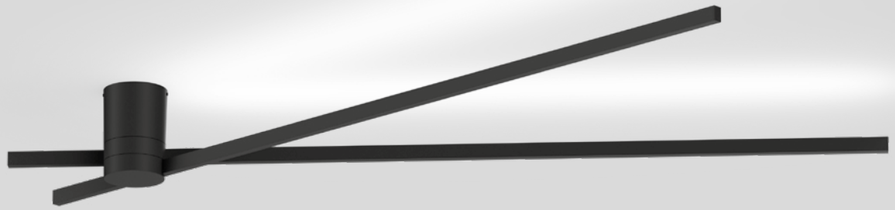

441

681



1.0

LED PCB 24W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | indir. light

IP20 180° L80|100K

2700K | CRI >90 | 2x905lm

CODE

254584B3




back



TRACE SPIN


Ceiling surface

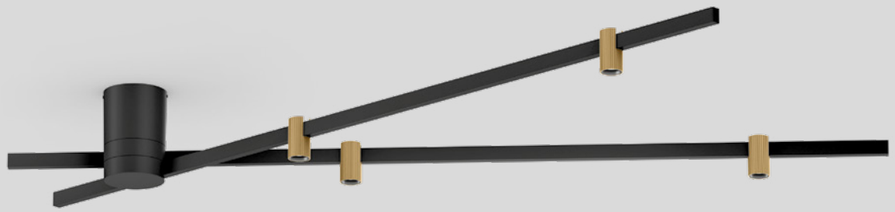

351

511 | 547

593



1.0

LED COB 26W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 180° M-30° L80|50K

2700K | CRI >90 | 4x360lm



CODE

183264CH3
183264B3


back


PERLEZ SPIN

Ceiling surface

169

701

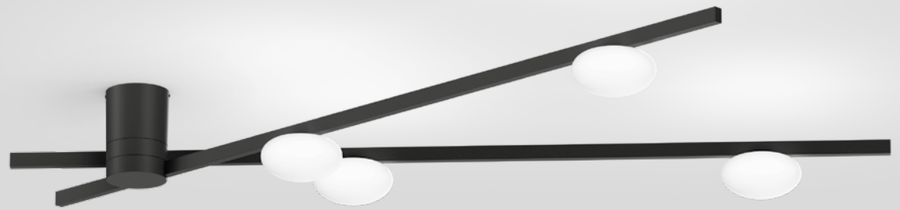



1.0

LED COB 25W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal glass

IP20 180° L80|50K

2700K | CRI >90 | 4x250lm

CODE

192784BW3




back



PRIVATE RESIDENCE | KWADRAAT BELGIUM

TRACE GRID


Ceiling surface

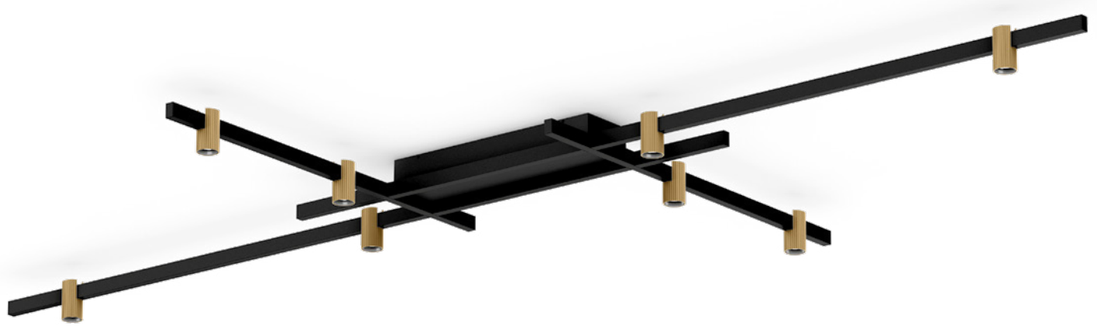

351

511 | 547

593




1.0

LED COB 41W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
direct light

IP20 M-30° L80|50K

2700K | CRI >90 | 8x415lm

	CODE
	183364CH3
	183364B3



2.0

LED PCB/COB 35W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
dir./indir. light

IP20 M-30° L80|50K

2700K | CRI >90 | 4x415/2x480lm

	CODE
	183464CH3
	183464B3


back


PERLEZ GRID

Ceiling surface

169

701

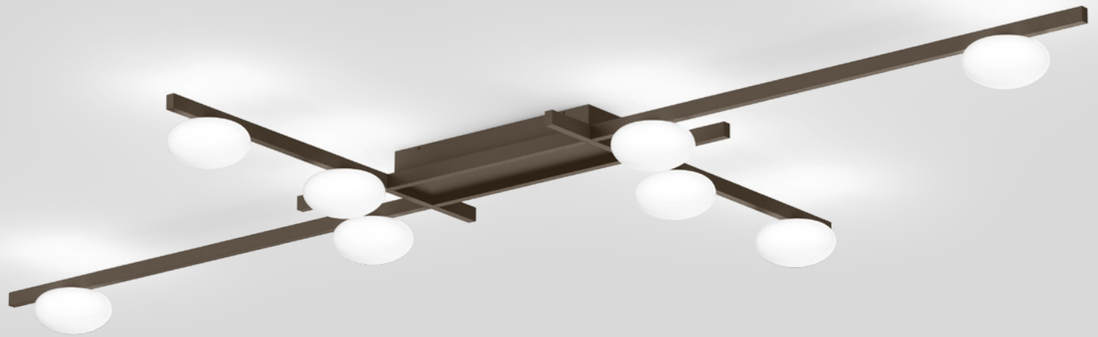



1.0

LED COB 40W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal glass
direct light

IP20 L80|50K

2700K | CRI >90 | 8x220lm

	CODE
	192884QW3
	192884BW3


back





OFFICE RPD | VIVA ARCHITECTURE ANTWERP | BELGIUM

VENN

Ceiling surface

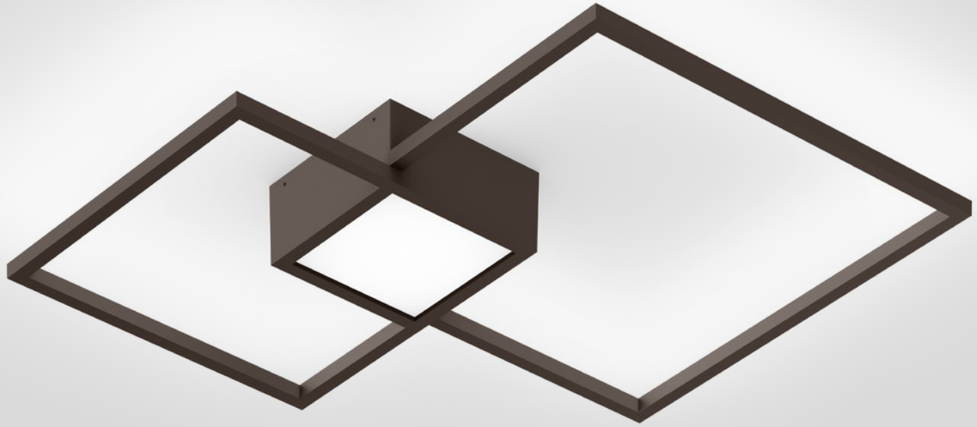





1.0

LED PCB 42W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
opal PMMA cover indirect light

IP20 L70|55K

	CODE
	149184W_
	149184Q_
	149184B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	3410	>90	3
3000K	3510	>90	5

2.0

LED PCB 49W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
opal PMMA cover dir./indir. light

IP20 L70|55K

	CODE
	149284W_
	149284Q_
	149284B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	480/3920	>90	3
3000K	495/4035	>90	5

CREATE YOUR OWN VENN
weverducre.com/venn-configurator


back



PRIVATE RESIDENCE | STUDIO REE THE NETHERLANDS

DRO

Ceiling surface

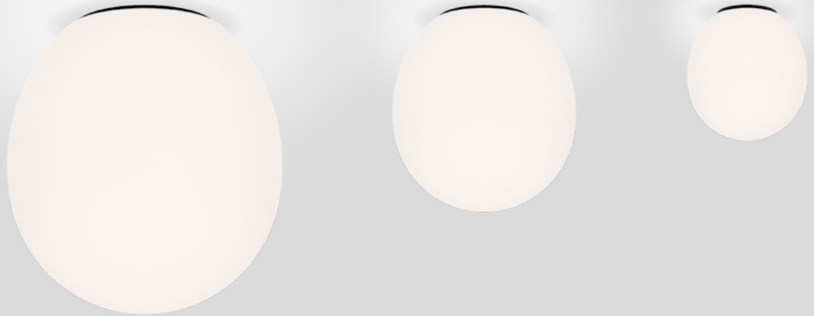







1.0

QT14 max. 5W | G9
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass

IP20

CODE
1721G0WB0

OPTIONAL

QT14 3.5W | G9 | phase-cut dim clear

CODE
2700K | 340lm 9010G803
3000K | 350lm 9010G805

2.0

C35 max. 6W | E14
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass

IP20

CODE
1722C0WB0

OPTIONAL

C35 5.5W | E14 | phase-cut dim | opal

CODE
2700K | 450lm 9003C103

3.0

A60 max. 12W | E27
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass

IP20

CODE
1723E0WB0

OPTIONAL

A60 9W | E27 | phase-cut dim | opal

CODE
2700K | 800lm 9003E152

back




PRIVATE RESIDENCE | STUDIO REE THE NETHERLANDS




IBIS STYLES PREVESSIN | FORTY STUDIO GENÈVE | SWITZERLAND

MIRRO

Ceiling surface

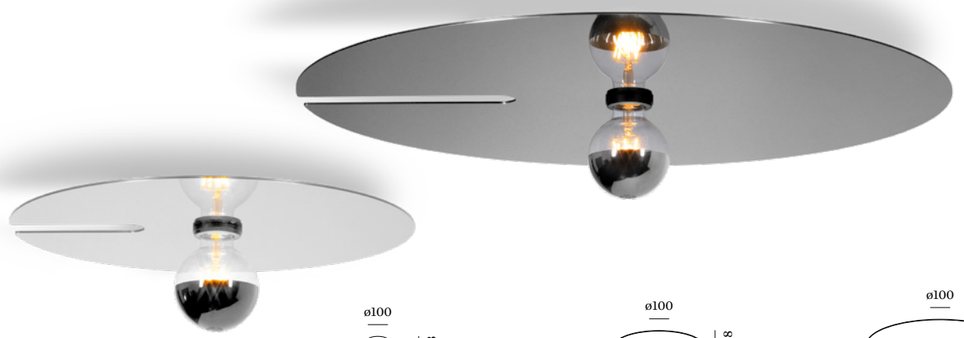













1.0

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium
one side reflective composite panel

IP20

	CODE
	6321E0GB0
	6321E0NB0
	6321E0LB0
	6321E0BL0

OPTIONAL

A60 5.5W | E27 | phase-cut dim
gold mirror

	CODE
2700K | 405lm	9003E139

A60 5.5W | E27 | phase-cut dim
silver mirror

	CODE
2700K | 405lm	9003E140

2.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium
one side reflective composite panel

IP20

	CODE
	6322E0GB0
	6322E0NB0
	6322E0LB0
	6322E0BL0

OPTIONAL

G95 5W/5.1W | E27 | phase-cut dim
gold mirror

	CODE
2200K | 370lm	9003E156
2700K | 410lm	9003E142

G95 5W | E27 | phase-cut dim
silver mirror

	CODE
2700K | 395lm	9003E157

3.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium
one side reflective composite panel

IP20

	CODE
	6323E0GB0
	6323E0NB0
	6323E0LB0
	6323E0BL0

OPTIONAL

G95 5W/5.1W | E27 | phase-cut dim
gold mirror

	CODE
2200K | 370lm	9003E156
2700K | 410lm	9003E142

G95 5W | E27 | phase-cut dim
silver mirror


	CODE
2700K | 395lm	9003E157




MIRRO SOFT

Ceiling surface







2.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | PET felt material
noise absorbing material

IP20

	CODE
	6322E0MF0
	6322E0LF0
	6322E0IF0
	6322E0AF0

3.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | PET felt material
noise absorbing material

IP20

	CODE
	6323E0MF0
	6323E0LF0
	6323E0IF0
	6323E0AF0

OPTIONAL

G95 5W/5.1W | E27 | phase-cut dim
gold mirror

	CODE
2200K | 370lm	9003E156
2700K | 410lm	9003E142

G95 5W | E27 | phase-cut dim
silver mirror

	CODE
2700K | 395lm	9003E157

G95 10W | E27 | phase-cut dim | opal

	CODE
2700K | 1060lm	9003E163

G95 4.5W | E27 | phase-cut dim | clear

	CODE
2700K | 375lm	9003E160

OPTIONAL

G95 5W/5.1W | E27 | phase-cut dim
gold mirror

	CODE
2200K | 370lm	9003E156
2700K | 410lm	9003E142

G95 5W | E27 | phase-cut dim
silver mirror

	CODE
2700K | 395lm	9003E157

G95 10W | E27 | phase-cut dim | opal

	CODE
2700K | 1060lm	9003E163

G95 4.5W | E27 | phase-cut dim | clear

	CODE
2700K | 375lm	9003E160

471
629




CLEA

Ceiling surface



557

631




1.0

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white opal glass hand blown

IP20 L80|50K

	CODE
	181184W_
	181184LS_
	181184SG_
	181184FJ_
	181184B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	780	>90	3
3000K	825	>90	5




2.0

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white opal glass hand blown

IP20 L80|50K

	CODE
	181284W_
	181284LS_
	181284SG_
	181284FJ_
	181284B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	780	>90	3
3000K	825	>90	5



3.0

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white opal glass hand blown


IP20 L80|50K

	CODE
	181384W_
	181384LS_
	181384SG_
	181384FJ_
	181384B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	770	>90	3
3000K	815	>90	5

back



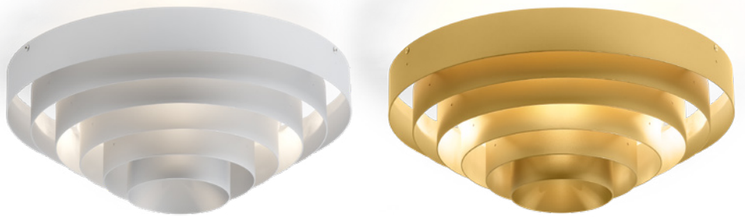

J.J.W.

Ceiling surface






479



633



03

3x A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium

IP20

	CODE
	2051E0S0
	2051E0G0

OPTIONAL

A60 3.8W | E27 | phase-cut dim
gold tinted

	CODE
2200K | 245lm	9003E109

A60 5.6W | E27 | phase-cut dim | clear

	CODE
2700K | 480lm	9003E138




WIRO


Ceiling surface

















2.0 WIRO

A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel

IP20

	CODE
	2086E0V0
	2086E0B0

OPTIONAL

A60 3.8W | E27 | phase-cut dim
gold tinted

	CODE
2200K | 245lm	9003E109

A60 5.6W | E27 | phase-cut dim | clear

	CODE
2700K | 480lm	9003E138

1.8 WIRO

T30 max. 25W | E27
220-240VAC | 50-60Hz
aluminium | steel

IP20

	CODE
	2082E0V0
	2082E0B0

OPTIONAL

T30-225 5.3W | E27 | phase-cut dim
gold tinted

	CODE
2200K | 380lm	9003E129
2700K | 425lm	9003E136

1.0 CONE

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel

IP20

	CODE
	2080E0V0
	2080E0B0

OPTIONAL

T30-225 5.3W | E27 | phase-cut dim
gold tinted

	CODE
2200K | 380lm	9003E129
2700K | 425lm	9003E136

3.8 WIRO

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel

IP20

	CODE
	2083E0V0
	2083E0B0

OPTIONAL

T30-225 5.3W | E27 | phase-cut dim
gold tinted

	CODE
2200K | 380lm	9003E129
2700K | 425lm	9003E136

BERND STEINHUBER

487

back



URBAN SPACES | STUDIO KOMO STUTTGART | GERMANY

reddot winner 2021

ROOMOR OFFICE

Ceiling surface







1.0 MICROPRISMATIC

LED PCB 35W | DALI-2 | push dim
220-240VAC | 50-60Hz | incl. driver
aluminium
microprismatic PMMA cover

IP20 L80|60K UGR ≤ 19/65°

	CODE
	1683M5W_
	1683M5B_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	3660	>90	5
4000K	3660	>90	7


1.0 OPAL

LED PCB 35W | DALI-2 | push dim
220-240VAC | 50-60Hz | incl. driver
aluminium
opal PMMA cover

IP20 L80|60K

	CODE
	168385W_
	168385B_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	3700	>90	5
4000K	3700	>90	7



back


PERLEZ IP44


Ceiling surface




169

701







1.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal glass

IP44 L80|50K

	CODE
	192484W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	520	>95	3
3000K	550	>95	5
4000K	580	>95	7

2.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal glass

IP44 L80|50K

	CODE
	192584W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	600	>95	3
3000K	630	>95	5
4000K	665	>95	7

3.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal glass

IP44 L80|50K

	CODE
	192684W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	645	>95	3
3000K	665	>95	5
4000K	705	>95	7

back



PRIVATE RESIDENCE | ATELIER B AUSTRIA

MIRBI IP44


Ceiling surface

171

707







1.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | clear and opal PMMA cover

IP44 L80|60K

3000K | CRI >90 | 640lm

	CODE
	175488W5
	175488BW5

2.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | clear and opal PMMA cover

IP44 L80|60K

3000K | CRI >90 | 640lm

	CODE
	175588W5
	175588BW5

back



PRIVATE RESIDENCE | AJ ARCHITECTEN BELGIUM

TAIO IP65

Ceiling surface





1.0

LED COB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
opal glass convex lens

IP65 W-105° L80|55K

	CODE
	180884W_
	180884Q_
	180884B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	455	>90	3
3000K	510	>90	5

back

165
747
757
803



GAW HOPPEHOF ERTVELDE | BELGIUM

ROB IP44

Ceiling surface





ø160



ø256



ø345



769

1.6

LED PCB 13W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA cover

IP44 L80|60K

	CODE
	701188W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1170	>90	3
3000K	1220	>90	5

2.6

LED PCB 19W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA cover

IP44 L80|60K

	CODE
	701288W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1800	>90	3
3000K	1810	>90	5

3.5

LED PCB 32W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA cover

IP44 L80|60K

	CODE
	701388W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	3340	>90	3
3000K	3360	>90	5

back



ORL PRAXIS SEMADENI | EMULSION INNENARCHITEKTUR CHUR | SWITZERLAND

ROBY IP44


Ceiling surface











1.6

LED PCB 13W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA cover

IP44 L80|60K

	CODE
	135188W_
	135188B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1080	>90	3
3000K	1130	>90	5

2.6

LED PCB 19W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA cover

IP44 L80|60K

	CODE
	135288W_
	135288B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1670	>90	3
3000K	1680	>90	5

3.5

LED PCB 32W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA cover

IP44 L80|60K

	CODE
	135388W_
	135388B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	3090	>90	3
3000K	3100	>90	5

back




PRIVATE RESIDENCE | FORUM OFFICE BELGIUM


TOWNA IP44


Ceiling surface











1.0

LED PCB 13W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | steel
opal PMMA cover

IP44 L80|60K

CODE
178188W_
178188J_
178188K_
178188Z_
178188B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1070	>90	3
3000K	1110	>90	5

2.0

LED PCB 19W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | steel
opal PMMA cover

IP44 L80|60K

CODE
178288W_
178288J_
178288K_
178288Z_
178288B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1650	>90	3
3000K	1660	>90	5

3.0

LED PCB 32W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | steel
opal PMMA cover

IP44 L80|60K

CODE
178388W_
178388J_
178388K_
178388Z_
178388B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	3050	>90	3
3000K	3060	>90	5



back




ROSS IP54

Ceiling surface
















1.0

LED PCB 9/11/15W
220-240VAC | 50-60Hz | incl. driver
polycarbonate housing
output and light colour selectable via dip switch

IP54 L80|50K

3000K/4000K/6000K | CRI >90
960lm/1170lm/1630lm

CODE
715184W9

2.0

LED PCB 10/15/20W
220-240VAC | 50-60Hz | incl. driver
polycarbonate housing
output and light colour selectable via dip switch

IP54 L80|50K

3000K/4000K/6000K | CRI >90
1270lm/1810lm/2360lm

CODE
715284W9

3.0

LED PCB 28/33/37W
220-240VAC | 50-60Hz | incl. driver
polycarbonate housing
output and light colour selectable via dip switch

IP54 L80|50K

3000K/4000K/6000K | CRI >90
4350lm/5000lm/5570lm

CODE
715384W9

back

Track / System

308 – 411


STREX TRACK




48V TRACKS 313 · CENO 321 · LECA 325 · DOMY 327 · MATCH 329



TRACE MINI 331 · MICK 333 · BOX 335 · DOCUS 337 · HEXO 339 · RAY 341



DOT MODULE 343 · OPAL MODULE 343 · COZY CONE 345 · MATCH 347 · TRACE 351 · ODREY 353




OPLIA 357 · SOLLI 359

1-PHASE TRACK



1-PHASE TRACKS 361 · PILLO 363 · SARA 365 · SQUBE 369 · PIRRO 371



DRO 373 · HEXO MINI 375 · RAY MINI 375 · HEXO 377 · RAY 377 · ODREY 379



RUVI 383

3-PHASE TRACK




3-PHASE TRACKS 385 · LIKO 387 · SQUBE 389 · HEXO MINI 391 · RAY MINI 391



HEXO 393 · RAY 393 · ROOMOR OFFICE 395

SYSTEM












QUBBY SYSTEM 397 · FLYRA SYSTEM 401 · ELLO SYSTEM 405 · ILANE 409

Track systems are easier than they seem: 1-phase tracks control all luminaires together, while 3-phase tracks allow separate control of spots, insets, and pendants. The 48-volt system offers maximum flexibility for different luminaires – and can be conveniently controlled via smartphone.

Schienensysteme sind einfacher als gedacht: 1-Phasen-Schienen steuern alle Leuchten gemeinsam, 3-Phasen-Schienen erlauben die separate Bedienung von Strahlern, Insets und Pendeln. Das 48-Volt-System bietet maximale Flexibilität für verschiedene Leuchten – und lässt sich bequem per Smartphone steuern.

weverducre.com/track-lighting

track

	STREX 48V DALI page 313	1-PHASE TRACK 220–240V page 361	3-PHASE TRACK 220–240V DALI page 385
1 CHOOSE YOUR MOUNTING	 recessed surface suspended suspended indirect	 recessed surface suspended	 surface suspended
2 INSTALL IT IN YOUR LAYOUT			
3 CHOOSE YOUR DRIVER	 remote in-line in-track ceiling		
4 COMBINE IT WITH INSETS			

For more support and an extended layout of track systems, please check our FAQ section at weverducre.com/faq

back


mounting

weverducre.com/strex-configurator

Discreetly hidden in the ceiling, as a striking surface-mounted option, or floating freely in the room – with three mounting types you'll find the right solution for any space. Tip: sketch your project and note where the track should run and which zones you want to highlight for a clearer overview.

CUSTOM CUT AVAILABLE
Have a look on page 917 or browse online: weverducre.com/strex-custom

CEILING RECESSED




STREX RECESSED

track 48V | 15A | DALI

SELV 31-33 65 5-25


		CODE
	1m	904111W0
	1m	904111B0
	2m	904112W0
	2m	904112B0
	3m	904113W0
	3m	904113B0



M | MOUNTING BRACKET

recessed mounting bracket
for 1m - 2pcs needed | for 2m - 4pcs needed | for 3m - 6pcs needed


	CODE
	904141I0



E | END CAP

	CODE
	904121W0
	904121B0

CEILING SURFACE



STREX SURFACE

track 48V | 15A | DALI

SELV


		CODE
	1m	904211W0
	1m	904211B0
	2m	904212W0
	2m	904212L0
	2m	904212M0
	2m	904212Q0
	2m	904212B0
	3m	904213W0
	3m	904213L0
	3m	904213M0
	3m	904213Q0
	3m	904213B0



E | END CAP

	CODE
	904221W0
	904221M0
	904221Q0
	904221B0

CEILING SUSPENDED




STREX SUSPENDED

track 48V | 15A | DALI

SELV

		CODE
	1m	904211W0
	1m	904211B0
	2m	904212W0
	2m	904212L0
	2m	904212M0
	2m	904212Q0
	2m	904212B0
	3m	904213W0
	3m	904213L0
	3m	904213M0
	3m	904213Q0
	3m	904213B0



STREX SUSP. INDIRECT

track 48V | 15A | DALI | with indirect light | 3.0m suspension sets already included | 15W/m


SELV

3000K | CRI >90 | 1900lm

		CODE
	2m	904512W5
	2m	904512B5

3000K | CRI >90 | 2850lm

		CODE
	3m	904513W5
	3m	904513B5



S | SUSPENSION SET

complete suspension set | incl. ceiling fixation bracket | not needed for indirect light version | for 1m - 2pcs needed | for 2m - 3pcs needed
for 3m - 4pcs needed

stainless steel colour

		CODE
	max. 1.5m	904341I0
	max. 3m	904342I0

black colour

		CODE
	max. 1.5m	904341B0
	max. 3m	904342B0





E | END CAP


	CODE
	904221W0
	904221M0
	904221Q0
	904221B0

back

layout

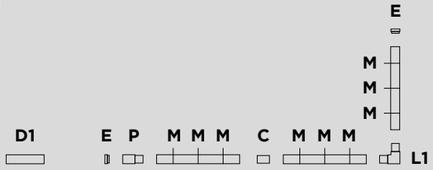

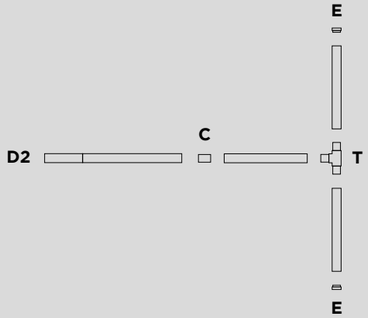




weverducre.com/strex-configurator

M | S | E
Choose your mounting
on page 312

D | P
Choose your driver | power feed
on page 316


GOOD TO KNOW
Electrical components of champagne or bronze connectors and drivers will be black.

ALL MOUNTINGS



BLANK COVER

		CODE
	2m	911002W0
	2m	911002B0




C | CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector

	CODE
	904431W0
	904431B0


CEILING RECESSED



L1 | L-CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector left and right

	CODE
	904132W0
	904132B0




L2 | L-CONNECTOR NON ELECTRICAL

only needed 1x for square installation

	CODE
	904133W0
	904133B0


CEILING SURFACE | SUSPENDED



L1 | L-CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector left and right


	CODE
	904232W0
	904232MB0
	904232QB0
	904232B0



L2 | L-CONNECTOR NON ELECTRICAL

only needed 1x for square installation


	CODE
	904233W0
	904233MB0
	904233QB0
	904233B0



T | T-CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector

	CODE
	904234W0
	904234B0



X | X-CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector

	CODE
	904235W0
	904235B0

back


driver

weverducre.com/strex-configurator

A driver regulates the current flowing through your LED lights, preventing overheating and unwanted flickering. Which is best suited to your STREX system depends on the chosen installation. The most elegant solution is an in-track driver, but many other variants are also available.

GOOD TO KNOW
Electrical components of champagne or bronze connectors and drivers will be black.

CEILING RECESSED | SURFACE




D1 | REMOTE DRIVER

remote converter | 220-240VAC 50-60Hz | 48V | for connection to power feed adapter

220-240V — 48V

	CODE
100W | 48V	90218901
150W | 48V	90218902


for more information see page 917



P | POWER FEED

48V | 15A | DALI | end/middle power feed adapter | max. 4 x 1.5mm²

	CODE
	904451W0
	904451B0




D2 | IN LINE DRIVER SURFACE

220-240VAC | 50-60Hz | 48V
incl. power end feed adapter
incl. DALI through wiring

220-240V DALI SELV IN — 48V DALI SELV OUT

	CODE
100W	904262W0
100W	904262B0
150W	904272W0
150W	904272B0




D3 | IN TRACK DRIVER SURFACE


220-240VAC | 50-60Hz | 48V
incl. power end feed function
with in line connection box

220-240V — 48V

	CODE
100W	904263W0
100W	904263MB0
100W	904263QB0
100W	904263B0



	CODE
250W	904283W0
250W	904283MB0
250W	904283QB0
250W	904283B0




D4 | IN TRACK DRIVER SURFACE

220-240VAC | 50-60Hz | 48V
incl. power middle/end feed function
with in track connection


220-240V — 48V

	CODE
100W	904264W0
100W	904264B0



	CODE
250W	904284W0
250W	904284B0

CEILING SUSPENDED




D1 | CEILING DRIVER

220-240VAC | 50-60Hz | 48V
incl. power middle/end feed adapter
incl. DALI through wiring
driver ceiling mounted

220-240V DALI SELV IN — 48V DALI SELV OUT

	CODE
100W	904361W0
100W	904361B0
150W	904371W0
150W	904371B0




D2 | IN LINE DRIVER

220-240VAC | 50-60Hz | 48V
incl. power end feed adapter
incl. DALI through wiring
suspended driver in line with profile

220-240V DALI SELV IN — 48V DALI SELV OUT

	CODE
100W	904362W0
100W	904362B0
150W	904372W0
150W	904372B0




D3 | IN TRACK DRIVER


220-240VAC | 50-60Hz | 48V
incl. power end feed function
incl. 3m power cable
suspended driver in the profile

220-240V — 48V

	CODE
100W	904363W0
100W	904363MB0
100W	904363QB0
100W	904363B0



	CODE
250W	904383W0
250W	904383B0




D4 | REMOTE DRIVER

220-240VAC | 50-60Hz | 48V
incl. power end feed function
incl. 3m power cable
incl. remote driver


220-240V — 48V

	CODE
100W	904364W0
100W	904364B0
150W	904374W0
150W	904374B0




	CODE
250W	904384W0
250W	904384B0

control

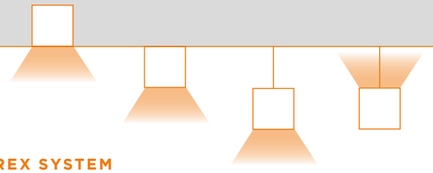

ALL MOUNTINGS



WIRELESS CASAMBI CONTROL


8W | adapter for wireless control
of 64 DALI fixtures in max. 8 groups

	CODE
	904491W0
	904491B0

HOW TO CONTROL MY STREX SYSTEM

The great thing about the STREX system? You have countless options. Switching or dimming your lights is easy with DALI. If you prefer not to install a hard-wired system, choose a more flexible setup – all you need is a Casambi control module and compatible DALI insets.

Das Großartige am STREX-System? Es bietet unzählige Möglichkeiten. Das Schalten oder Dimmen Ihrer Leuchten ist mit DALI ganz einfach. Wenn Sie kein fest verdrahtetes System installieren möchten, wählen Sie eine flexiblere Lösung – alles, was Sie benötigen, sind ein Casambi-Steuermodul und kompatible DALI-Module.

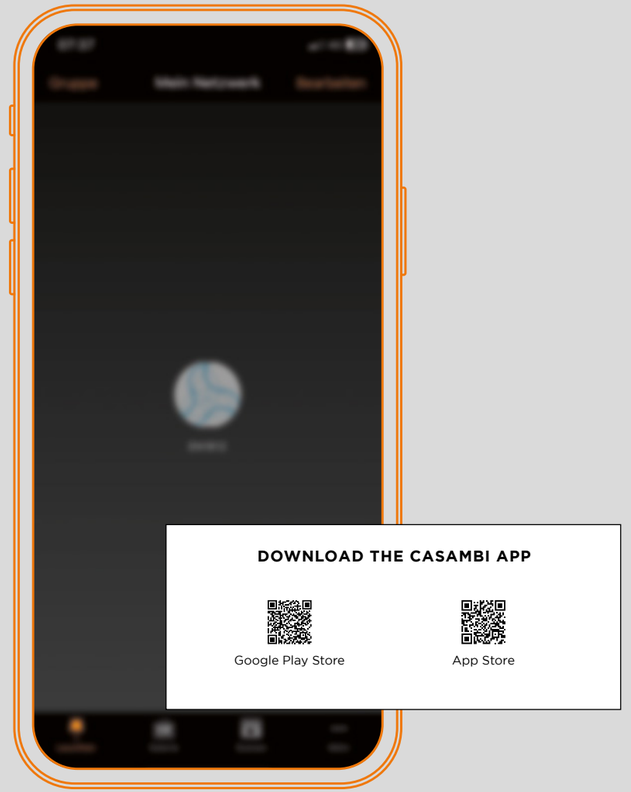


CREATE A SCENE FOR YOUR
INDIVIDUAL LIGHTING SOLUTION







CENO on STREX

48V system







1.0

LED COB 10W | 48V
aluminium | PC adapter

IP20 0-90°|355° M-31° L70|55K

non dim

	CODE
	166562W_
	166562BQ_
	166562K_
	166562CH_
	166562B_

DALI-2

	CODE
	166565W_
	166565BQ_
	166565K_
	166565CH_
	166565B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	480 | >90	3
3000K	510 | >90	5

accessories on page 910

2.0

LED COB 17W | 48V
aluminium | PC adapter

IP20 0-90°|355° M-31° L70|55K

non dim

	CODE
	166662W_
	166662BQ_
	166662K_
	166662CH_
	166662B_

DALI-2

	CODE
	166665W_
	166665BQ_
	166665K_
	166665CH_
	166665B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	2x480 | >90	3
3000K	2x510 | >90	5

accessories on page 910



OPTIONAL

honeycomb louver

	CODE
	915230B0

PRIVATE RESIDENCE | STUDIO BENOIT BELGIUM

back







PRIVATE RESIDENCE | STUDIO BINNEN THE NETHERLANDS



LECA on STREX

48V system

135

189

569



1.0

LED COB 7W | 48V
aluminium | PC adapter

IP20 0-90°|350° M-31° L80|50K

non dim

	CODE
	188662W_
	188662BQ_
	188662B_

DALI-2

	CODE
	188665W_
	188665BQ_
	188665B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	585 | >90	3
3000K	620 | >90	5



OPTIONAL

honeycomb louver


	CODE
	915230B0

back



DOMY on STREX

48V system



1.0

LED COB 7W | 48V
aluminium | glass | PC adapter

IP20 0-90°|350° M-25° L80|50K

non dim

	CODE
	107452WLS_
	107452WFJ_
	107452WSG_
	107452BT_
	107452BB_

DALI-2

	CODE
	107455WLS_
	107455WFJ_
	107455WSG_
	107455BT_
	107455BB_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	560 | >90	3
3000K	575 | >90	5

back

RESTAURANT GARDENS | ANDREAS HUHN ARCHITEKTEN TÜBINGEN I GERMANY

reddot winner 2023



MATCH on STREX

48V *system* 61 | 137 | 153


193

415 | 509

571

589 | 685

723 | 729



1.0

LED COB 10W | 48V
aluminium | PC adapter

IP20 0-90°|360° M-30° L80|50K

non dim

	CODE
	179152W_
	179152BL_
	179152CH_
	179152BQ_
	179152B_

DALI-2

	CODE
	179155W_
	179155BL_
	179155CH_
	179155BQ_
	179155B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	530	>90	3
3000K	560	>90	5

accessories on page 910


back



TRACE mini on STREX

48V system

591



1.0

LED PCB 5W | 48V
aluminium | PC adapter

IP20 0-90°|355° M-30° L80|50K

non dim

	CODE
	333552W_
	333552BM_
	333552B_

DALI-2


	CODE
	333555W_
	333555BM_
	333555B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	326	>90	3
3000K	336	>90	5

back



DENTAL PRACTICE M.K.A. | DMG ARCHITECTURAL SOLUTIONS KAPELLEN | BELGIUM

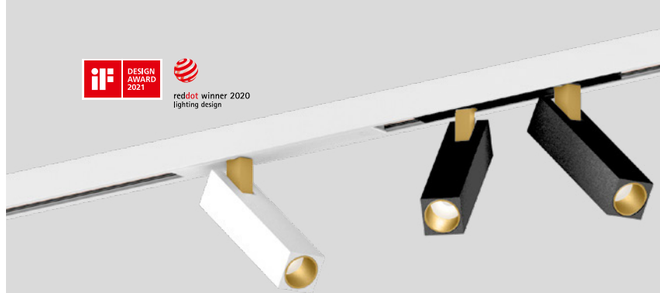



MICK on STREX

48V *system*

199

687 | 691





1.0

LED COB 13W | 48V
aluminium | PC adapter

IP20 0-90°|360° M-23° L80|50K

non dim

	CODE
	159442J_
	159442K_

DALI-2

	CODE
	159445J_
	159445K_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	415	>90	3
3000K	435	>90	5

accessories on page 910

2.0

LED COB 22W | 48V
aluminium | PC adapter

IP20 0-90°|360° M-23° L80|50K

non dim

	CODE
	159542J_
	159542K_

DALI-2

	CODE
	159545J_
	159545K_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x445	>90	3
3000K	2x465	>90	5

accessories on page 910




PRIVATE RESIDENCE BELGIUM



BOX on STREX

48V system



1.0

LED COB 9W | 48V
aluminium

IP20 M-25° L80|55K

adapter | 2700K | CRI >90 | 505lm

	CODE
	258162W_3
	258162B_3
DALI-2	258165W_3
DALI-2	258165B_3


adapter | 3000K | CRI >90 | 535lm

	CODE
	258162W_5
	258162B_5
DALI-2	258165W_5
DALI-2	258165B_5


housing | inner reflector colour

CODE
W
WM
E
M
H
Q
CH
B

only for ceiling surface and suspended tracks


W


WM



E


M


H


Q


CH


B


back



DOCUS on STREX

48V system

241



1.0

LED COB 9W | 48V
aluminium

IP20 M-25° L80|55K

adapter | 2700K | CRI >90 | 505lm

		CODE
		258362W_3
		258362B_3
	DALI-2	258365W_3
	DALI-2	258365B_3


adapter | 3000K | CRI >90 | 535lm

		CODE
		258362W_5
		258362B_5
	DALI-2	258365W_5
	DALI-2	258365B_5

housing | inner reflector colour

	CODE
	W
	J
	E
	K
	B

only for ceiling surface and suspended tracks

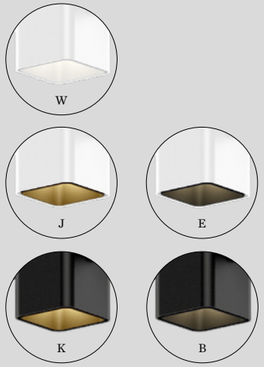


back






HEXO on STREX

48V system





1.0

LED COB 9W | 48V
aluminium

IP20 M-25° L80|55K

adapter | 2700K | CRI >90 | 505lm

	CODE
	258462W_3
	258462B_3
DALI-2	258465W_3
DALI-2	258465B_3


adapter | 3000K | CRI >90 | 535lm

	CODE
	258462W_5
	258462B_5
DALI-2	258465W_5
DALI-2	258465B_5

housing | inner reflector colour

CODE
W
J
E
Q
K
B


only for ceiling surface and suspended tracks

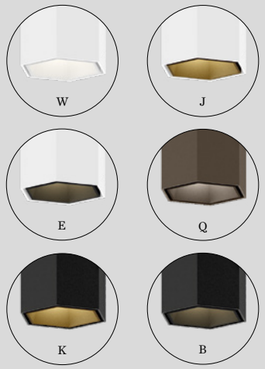

back




PRIVATE RESIDENCE | AJ ARCHITECTEN BELGIUM

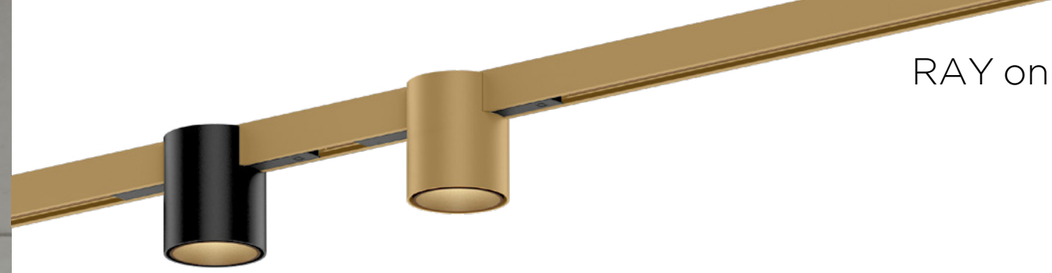

RAY on STREX

48V system



1.0

LED COB 9W | 48V
aluminium

IP20 M-25° L80|55K

adapter | 2700K | CRI >90 | 485lm

	CODE
	258262W_3
	258262B_3
DALI-2	258265W_3
DALI-2	258265B_3

adapter | 3000K | CRI >90 | 515lm

	CODE
	258262W_5
	258262B_5
DALI-2	258265W_5
DALI-2	258265B_5


housing | inner reflector colour

CODE
W
WM
E
M
H
Q
CH
B


only for ceiling surface and suspended tracks


W


WM



E


M


H


Q


CH


B

back

251
537
615
759
805




FORUM ADVOCATEN | VRV ARCHITECTEN ANTWERP | BELGIUM


STREX MODULE

48V system









1.0 DOT

LED PCB 9W | 48V
PC adapter | cover
PC lens

IP20 W-40° UGR≤19 L80|60K

non dim

	CODE
	171362W_
	171362B_

DALI

	CODE
	171365W_
	171365B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	840	>90	3
3000K	860	>90	5

1.0 OPAL

LED PCB 15W | 48V
PC adapter | cover
PMMA opal cover

IP20 L80|60K

non dim

	CODE
	171382W_
	171382B_

DALI

	CODE
	171385W_
	171385B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	620	>90	3
3000K	640	>90	5

2.0 OPAL

LED PCB 29W | 48V
PC adapter | cover
PMMA opal cover

IP20 L80|60K

non dim

	CODE
	171482W_
	171482B_

DALI

	CODE
	171485W_
	171485B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1240	>90	3
3000K	1280	>90	5






MORE VERSIONS ONLINE
weverducre.com/more-strex-module


back


COZY CONE on STREX

48V system

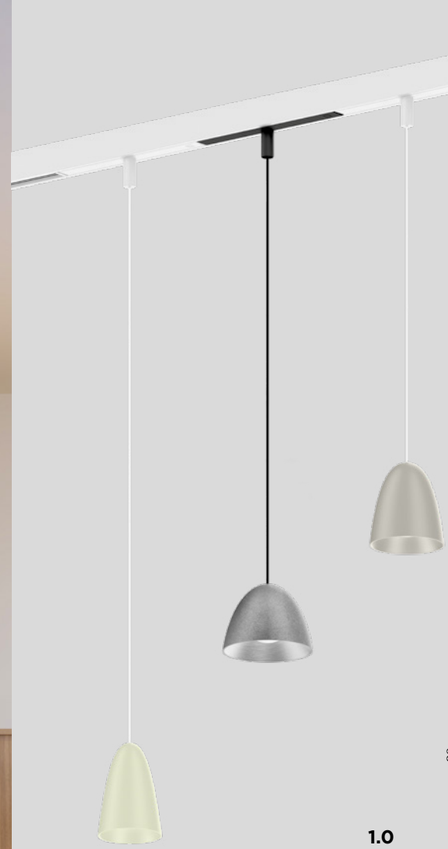







1.0

LED PCB 7W | 48V | DALI-2
aluminium | glass | PC adapter
black and T– black cable/adapter
others – white cable/adapter

IP20 M-40° L80|50K

2700K | CRI >90 | 480lm

	CODE
	241665LS3
	241665SG3
	241665FJ3
	241665T3
	241665B3

2.0

LED PCB 7W | 48V | DALI-2
aluminium | glass | PC adapter
black and T – black cable/adapter
others – white cable/adapter

IP20 M-40° L80|50K

2700K | CRI >90 | 510lm

	CODE
	241765LS3
	241765SG3
	241765FJ3
	241765T3
	241765B3


3.0

LED PCB 7W | 48V |DALI-2
aluminium | glass | PC adapter
black and T – black cable/adapter
others – white cable/adapter

IP20 M-40° L80|50K

2700K | CRI >90 | 520lm

	CODE
	241865LS3
	241865SG3
	241865FJ3
	241865T3
	241865B3



back



PRIVATE RESIDENCE | DÉVÉ CREATIONS THE NETHERLANDS

MATCH on STREX

48V system 61 | 137 | 153


193


415 | 509

571

589 | 685

723 | 729

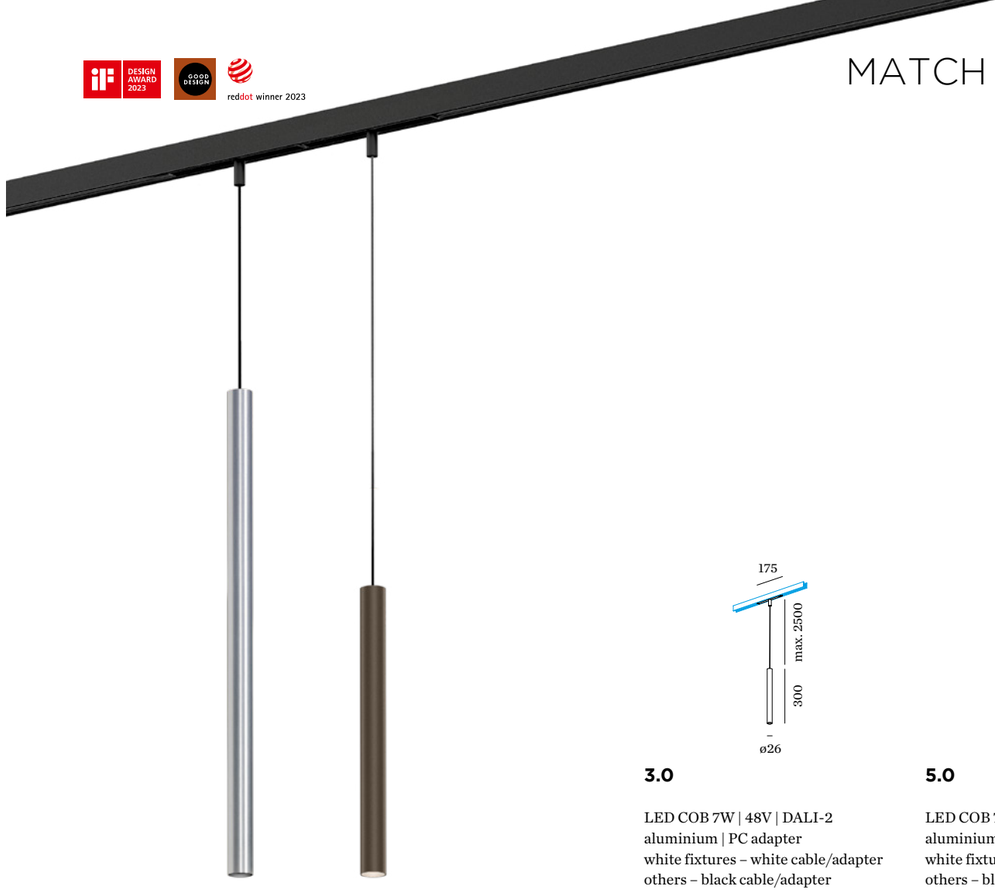



3.0

LED COB 7W | 48V | DALI-2
aluminium | PC adapter
white fixtures – white cable/adapter
others – black cable/adapter

IP20 W-54° L80|50K

	CODE
	179775W_
	179775L_
	179775M_
	179775Q_
	179775B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	490	>90	3
3000K	520	>90	5

5.0


LED COB 7W | 48V | DALI-2
aluminium | PC adapter
white fixtures – white cable/adapter
others – black cable/adapter

IP20 W-54° L80|50K

	CODE
	179875W_
	179875L_
	179875M_
	179875Q_
	179875B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	490	>90	3
3000K	520	>90	5






MORE VERSIONS ONLINE
weverducre.com/more-match-on-strex

back



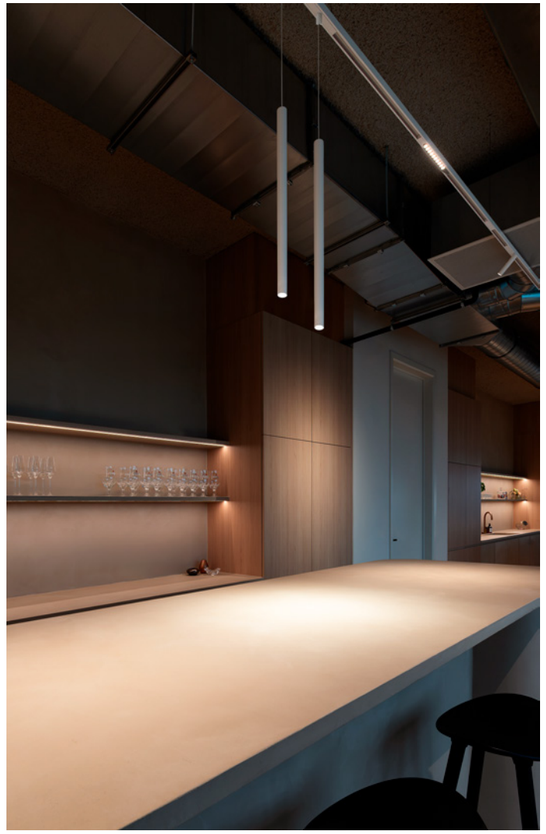


OFFICE LAMETT DEERLIJK | BELGIUM



TRACE on STREX

48V *system*

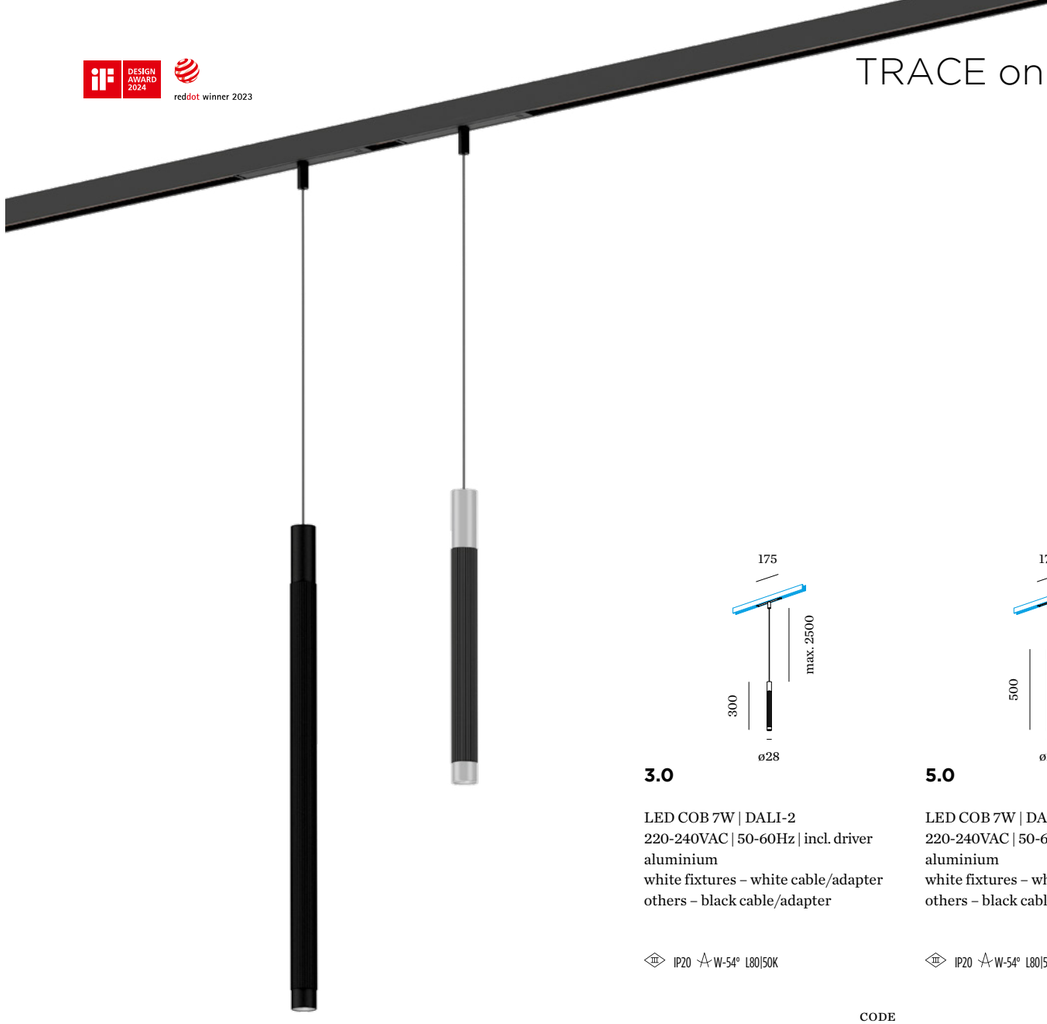

261 | 269 | 273

511 | 547

593 | 595


3.0

LED COB 7W | DALI-2
220-240VAC | 50-60Hz | incl. driver
aluminium
white fixtures – white cable/adapter
others – black cable/adapter

IP20 W-54° L80|50K

	CODE
	333875W_
	333875BL_
	333875BM_
	333875B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	490	>90	3
3000K	520	>90	5



5.0


LED COB 7W | DALI-2
220-240VAC | 50-60Hz | incl. driver
aluminium
white fixtures – white cable/adapter
others – black cable/adapter

IP20 W-54° L80|50K

	CODE
	333975W_
	333975BL_
	333975BM_
	333975B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	490	>90	3
3000K	520	>90	5

MORE VERSIONS ONLINE
weverducre.com/more-trace-on-strex



back





PRIVATE RESIDENCE | TOM LIERMAN BUREAU VOOR ARCHITECTUUR & INTERIEUR BELGIUM


ODREY on STREX

48V system



















MORE VERSIONS ONLINE
weverducre.com/more-odrey-on-strex

1.2

LED COB 7W | 48V | DALI-2
aluminium | PC adapter
white fixtures – white cable/adapter
others – black cable/adapter

IP20 M-32° L70|55K

	CODE
	197265WW_
	197265QQ_
	197265BL_
	197265BG_
	197265BB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	400	>90	3
3000K	445	>90	5

1.4

LED COB 7W | 48V | DALI-2
aluminium | PC adapter
white fixtures – white cable/adapter
others – black cable/adapter

IP20 M-32° L70|55K

	CODE
	197465WW_
	197465QQ_
	197465BL_
	197465BG_
	197465BB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	450	>90	3
3000K	470	>90	5

1.6

LED COB 7W | 48V | DALI-2
aluminium | PC adapter
white fixtures – white cable/adapter
others – black cable/adapter

IP20 M-32° L70|55K

	CODE
	197665WW_
	197665QQ_
	197665BL_
	197665BG_
	197665BB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	480	>90	3
3000K	505	>90	5

optional inner cover on page 910


517 | 539

599

back



PRIVATE RESIDENCE | WALRAVENS WEETS ARCHITECTEN
BELGIUM

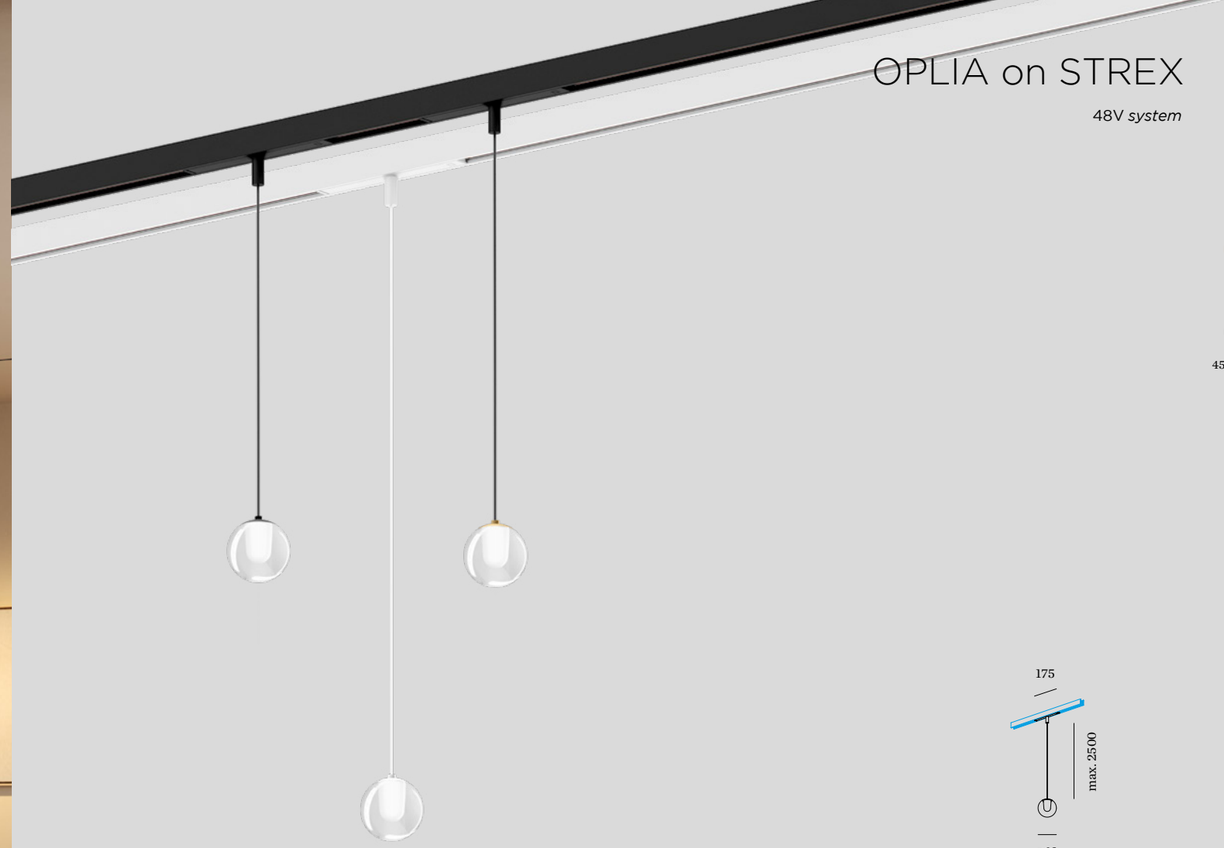

OPLIA on STREX

48V system


457 | 521

1.0

LED PCB 5W | 48V | DALI-2
aluminium | glass | PC adapter
white fixtures – white cable/adapter
others – black cable/adapter

IP20 L80|100K

2700K | CRI >90 | 245lm




CODE
246285W3
246285M3
246285B3

back

SOLLI on STREX

48V system






1.0

LED COB 7W | 48V | DALI-2
aluminium | black cable
artisanal Italian hand blown glass
PC adapter

IP20 L80|50K

	CODE
	238985FD_
	238985TD_
	238985WB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	280	>90	3
3000K	290	>90	5





back

523

RECESSED | SURFACE | SUSPENDED EXAMPLES

configuration as seen from top view
for more support and extended layout of 1-phase tracks,
please check our FAQ section on weverducre.com/faq






TRACK PROFILE

recessed | 220-240V | 16A

	CODE
1m	90014118
1m	90014119
2m	90014120
2m	90014121
3m	90014122
3m	90014123




F | MOUNTING BRACKET

for recessed fixation

34-45 45 4-15

CODE
90014100

for 1.0m - 2pcs needed
for 2.0m - 3pcs needed
for 3.0m - 4pcs needed



TRACK PROFILE

surface | suspended | 220-240V | 16A

	CODE
1m	90014001
1m	90014007
2m	90014002
2m	90014008
3m	90014003
3m	90014009




G | SUSPENSION SET

complete suspension set
incl. ceiling fixation bracket

	CODE
max. 1.5m	90014101
max. 1.5m	90014102
max. 3m	90014103
max. 3m	90014104


for 1.0m - 2pcs needed
for 2.0m - 3pcs needed
for 3.0m - 4pcs needed



A | END FEED 1.0

220-240V | max. 3 x 1.5mm² - 16A


	CODE
	90014018
	90014019



A | END FEED 2.0

220-240V | max. 3 x 1.5mm² - 16A


	CODE
	90014020
	90014021



B | MIDDLE FEED

straight
220-240V | max. 3 x 1.5mm² - 16A

	CODE
	90014036
	90014037



C | END CAP LEFT/RIGHT


	CODE
	90014028
	90014029



D | L-FEED 1.0

220-240V | max. 3 x 1.5mm² - 16A

	CODE
	90014024
	90014025



D | L-FEED 2.0

220-240V | max. 3 x 1.5mm² - 16A

	CODE
	90014026
	90014027



E | STRAIGHT CONNECTOR

straight | 220-240V | 16A

	CODE
	90014022
	90014023



COVERPLATE END FEED

only use with recessed tracks

	CODE
	90014124
	90014125


more 1-phase track accessories on page 918



PILLO on track

1-*Phase*





1.0

PAR11 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter

IP20 0°-90°|350°

	CODE
	194420W0
	194420B0

OPTIONAL

PAR11 4.3W | GU10 | phase-cut dim

	CODE
2700K | 225lm	901128B3
3000K | 235lm	901128B5

back



ENSO BOUTIQUE HOTEL | TIM DE TAEYE & TINE VANPARIJS KNOKKE-HEIST | BELGIUM



SARA on track


1-*Phase*











1.0 LED

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter

IP20 0-90°|355° M-34° L70|55K

	CODE
	157168W_
	157168G_
	157168K_
	157168B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	655	>80	3
3000K	700	>80	5

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter

IP20 0-90°|355°

	CODE
	157120W0
	157120G0
	157120K0
	157120B0

OPTIONAL


PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905














back


TRUKIKORA
5
4
3
2
1




LENDHOTEL | LAM ARCHITEKTUR ZT GMBH GRAZ | AUSTRIA



SQUBE on track

1-Phase

205



1.0 LED

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter

IP20 0-90°|355° M-39° L70|55K

	CODE
	144168W_
	144168B_


LIGHT COLOUR	LUMEN	CRI	CODE
2700K	415	>90	3
3000K	430	>90	5
1800-3000K	350	>90	9



black ring LED



PAR16



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter

IP20 0-90°|355°

	CODE
	144120W0
	144120B0

OPTIONAL


PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905

back





white fixtures with white adapter
other fixtures with black adapter




PIRRO on track

1-*Phase*

77

215 | 221 | 223



2.0

LED COB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PC lens and reflector
1-phase Global® track adapter

IP20 310° M-32° L70|55K


	CODE
	173264E_
	173264K_
	173264B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x355	>90	3
3000K	2x385	>90	5

OPTIONAL

honeycomb louver

	CODE
	915230B0



4.0

LED COB 20W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PC lens and reflector
1-phase Global® track adapter

IP20 310° M-32° L70|55K


	CODE
	173464E_
	173464K_
	173464B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	4x365	>90	3
3000K	4x380	>90	5

OPTIONAL

honeycomb louver

	CODE
	915230B0




2.0 OPAL

LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PMMA cover
1-phase Global® track adapter

IP20 310° L80|60K

	CODE
	173284E_
	173284K_
	173284B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	270	>90	3
3000K	280	>90	5



4.0 OPAL

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PMMA cover
1-phase Global® track adapter

IP20 310° L80|60K


	CODE
	173484E_
	173484K_
	173484B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	685	>90	3
3000K	710	>90	5

back



URBAN SPACES | STUDIO KOMO STUTTGART | GERMANY

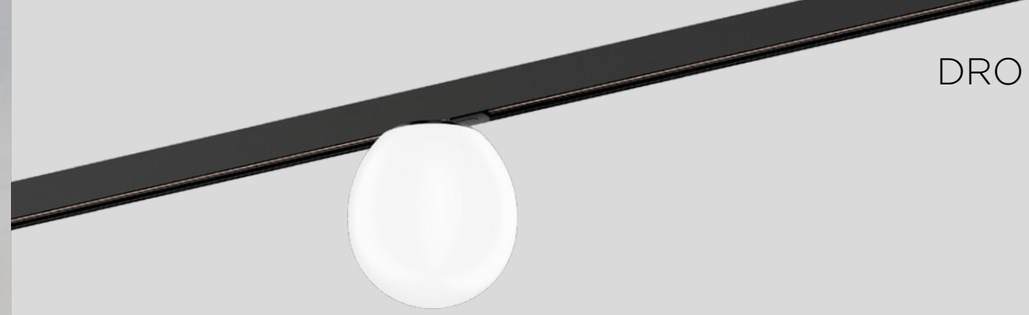

DRO on track

1-Phase

279

465

623

715 | 731



1.0

QT14 max. 5W | G9
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass
1-phase Global® track adapter

IP20

	CODE
	1724G0WB0


OPTIONAL

QT14 3.5W | G9 | phase-cut dim clear

	CODE
2700K | 340lm	9010G803
3000K | 350lm	9010G805

back




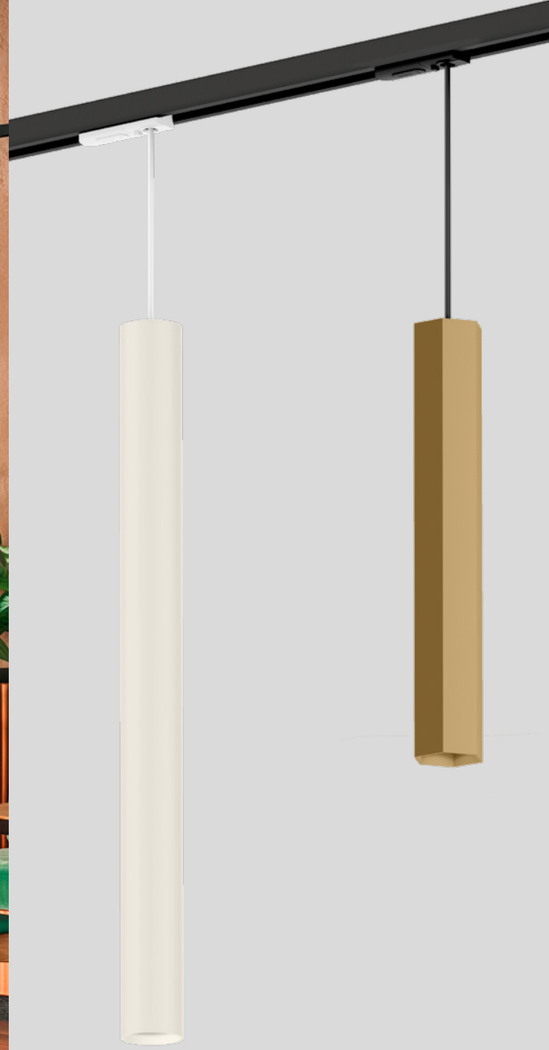

HEXO mini | RAY mini on track

1-Phase

243 | 247
505 | 507
531 | 535
611 | 613



HEXO MINI 3.0 | 5.0

PAR11 max. 12W | GU10
220-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter

IP20

3.0

300mm	CODE
	259320M0
	259320Q0
	259320B0


5.0

500mm	CODE
	259420M0
	259420Q0
	259420B0

OPTIONAL

PAR11 4.3W | GU10 | phase-cut dim

	CODE
2700K | 225lm	901128B3
3000K | 235lm	901128B5



RAY MINI 3.0 | 5.0

PAR11 max. 12W | GU10
220-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter
white and LS – white cable/adapter
others – black cable/adapter

IP20

3.0

300mm	CODE
	260320W0
	260320LS0
	260320Q0
	260320B0

5.0

500mm	CODE
	260420W0
	260420LS0
	260420Q0
	260420B0

OPTIONAL


PAR11 4.3W | GU10 | phase-cut dim

	CODE
2700K | 240lm	901128W3
2700K | 225lm	901128B3
3000K | 255lm	901128W5
3000K | 235lm	901128B5

back




OFFICE THE HOUSE | SPACELAB ARKITEKTER COPENHAGEN | DENMARK

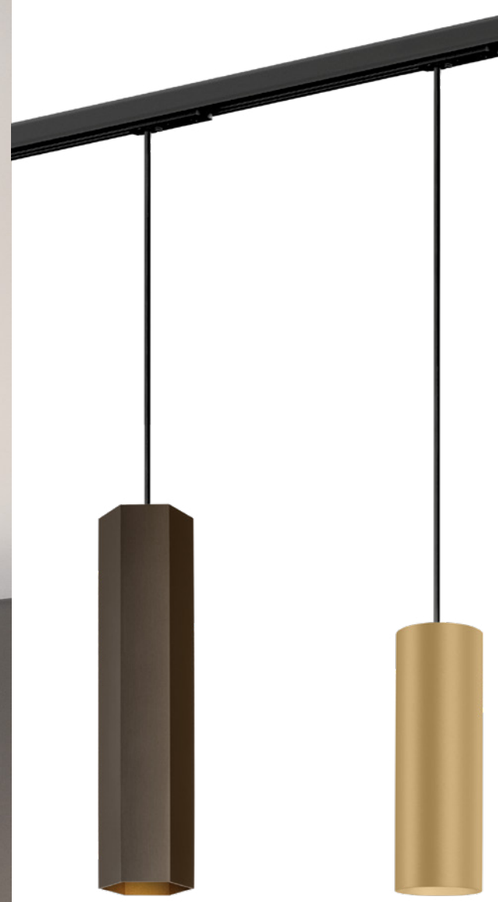

HEXO | RAY on track

1-*Phase*



HEXO 3.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter

IP20

3.0


300mm	CODE
	215620G0
	215620Q0
	215620P0
	215620B0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 440lm	901228B3
3000K | 460lm	901228B5

more lamps and info on page 905



RAY 2.0 | 3.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter
white fixtures – white cable/adapter
others – black cable/adapter

IP20

2.0

200mm	CODE
	217520W0
	217520G0
	217520M0
	217520Q0
	217520P0
	217520B0

3.0

300mm	CODE
	217620W0
	217620G0
	217620M0
	217620Q0
	217620P0
	217620B0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905

245 | 251
533 | 537
615
759
805





PRIVATE RESIDENCE | BRITTE MARCUS BELGIUM

ODREY on track

1-Phase









517 | 539





599

1.1

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter
white fixtures – white cable/adapter
others – black cable/adapter

IP20













	CODE
	187120WW0
	187120GG0
	187120QQ0
	187120BL0
	187120BG0
	187120BB0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905

1.2

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter
white fixtures – white cable/adapter
others – black cable/adapter

IP20

	CODE
	187220WW0
	187220GG0
	187220QQ0
	187220BL0
	187220BG0
	187220BB0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905

1.3

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter
white fixtures – white cable/adapter
others – black cable/adapter

IP20

	CODE
	187320WW0
	187320GG0
	187320QQ0
	187320BL0
	187320BG0
	187320BB0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905

back





SHOWROOM GRANDO KEUKENS BELGIUM

ODREY on track

1-Phase







517 | 539

599

1.4

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter
white fixtures – white cable/adapter
others – black cable/adapter

IP20

	CODE
	187420WW0
	187420GG0
	187420QQ0
	187420BL0
	187420BG0
	187420BB0

1.5

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter
white fixtures – white cable/adapter
others – black cable/adapter

IP20

	CODE
	187520WW0
	187520GG0
	187520QQ0
	187520BL0
	187520BG0
	187520BB0

1.6

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter
white fixtures – white cable/adapter
others – black cable/adapter

IP20

	CODE
	187620WW0
	187620GG0
	187620QQ0
	187620BL0
	187620BG0
	187620BB0

optional inner cover on page 910













OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5


more lamps and info on page 905





RUVI on track

1-Phase



1.0

G95 max. 12W | E27
220-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter
white fixtures – white cable/adapter
others – black cable/adapter

IP20

	CODE
	1672E0W0
	1672E0M0
	1672E0Q0
	1672E0B0

OPTIONAL

G95 10W | E27 | phase-cut dim | opal


	CODE
2700K | 1060lm	9003E163


back



SURFACE | SUSPENDED EXAMPLES

configuration as seen from top view

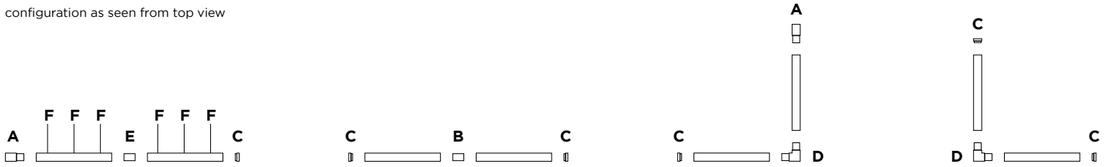



TRACK PROFILE

surface | suspended | DALI
220-240V | 16A

DALI FELV

		CODE
	1m	90014200
	1m	90014201
	2m	90014202
	2m	90014203
	3m	90014204
	3m	90014205




F | SUSPENSION SET

complete suspension set
incl. ceiling fixation bracket

		CODE
	max. 1.5m	90014206
	max. 1.5m	90014207
	max. 3m	90014208
	max. 3m	90014209

for 1.0m - 2pcs needed
for 2.0m - 3pcs needed
for 3.0m - 4pcs needed

top view




A | END FEED 1.0

including cable gasket
220-240V | max. 7 x 1.5-2.5mm² | 16A

	CODE
	90014240
	90014241

top view




A | END FEED 2.0

including cable gasket
220-240V | max. 7 x 1.5-2.5mm² | 16A

	CODE
	90014238
	90014239

top view



B | MIDDLE FEED

straight
220-240V | max. 7 x 1.5-2.5mm² | 16A


	CODE
	90014224
	90014225



C | END CAP LEFT/RIGHT

	CODE
	90014216
	90014217

top view




D | L-FEED 1.0

220-240V | max. 7 x 1.5-2.5mm² | 16A

	CODE
	90014220
	90014221

top view



D | L-FEED 2.0

220-240V | max. 7 x 1.5-2.5mm² | 16A

	CODE
	90014222
	90014223


top view



E | STRAIGHT CONNECTOR

straight | 220-240V | 16A

	CODE
	90014226
	90014227



TRACK COVER

		CODE
	1m	90014236
	1m	90014237

more 3-phase track accessories on page 919


back





LIKO on track

3-Phase









1.0

LED COB 12W
220-240VAC | 50-60Hz
aluminium
3-phase track adapter

IP20 0-90°|360° M-30° L80|50K

non-dim

	CODE
	263152W_
	263152B_

DALI-2

	CODE
	263155W_
	263155B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1070	>90	3
3000K	1110	>90	5

OPTIONAL

honeycomb louver

	CODE
	915231B0

2.0

LED COB 14W | ≤115lm/W
220-240VAC | 50-60Hz
aluminium
3-phase track adapter

IP20 0-90°|360° M-27° L80|50K

non-dim

	CODE
	263252W_
	263252B_

DALI-2

	CODE
	263255W_
	263255B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1565	>90	3
3000K	1600	>90	5

OPTIONAL

honeycomb louver

	CODE
	915232B0

3.0

LED COB 18W | ≤120lm/W
220-240VAC | 50-60Hz
aluminium
3-phase track adapter

IP20 0-90°|360° M-27° L80|50K

non-dim

	CODE
	263352W_
	263352B_

DALI-2

	CODE
	263355W_
	263355B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2110	>90	3
3000K	2175	>90	5

OPTIONAL

honeycomb louver

	CODE
	915233B0

≤120lm/W

MORE VERSIONS ONLINE
weverducre.com/more-liko

back




AOK OFFICE | DESIGNFUNKTION BERLIN | GERMANY


SQUBE on track


3-Phase



205







1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
3-phase track adapter

IP20 0-90°|355°

	CODE
	144720W0
	144720B0

2.0 LED

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium
3-phase track adapter

IP20 0-90°|355° M-32° L70|55K

	CODE
	144368W_
	144368B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	925	>90	3
3000K	960	>90	5
1800K-3000K	645	>90	9

3.0 LED

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz
aluminium
3-phase track adapter

IP20 0-90°|355° M-27° L70|55K

	CODE
	144558W_
	144558B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1400	>90	3
3000K	1480	>90	5





OPTIONAL


PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905

back




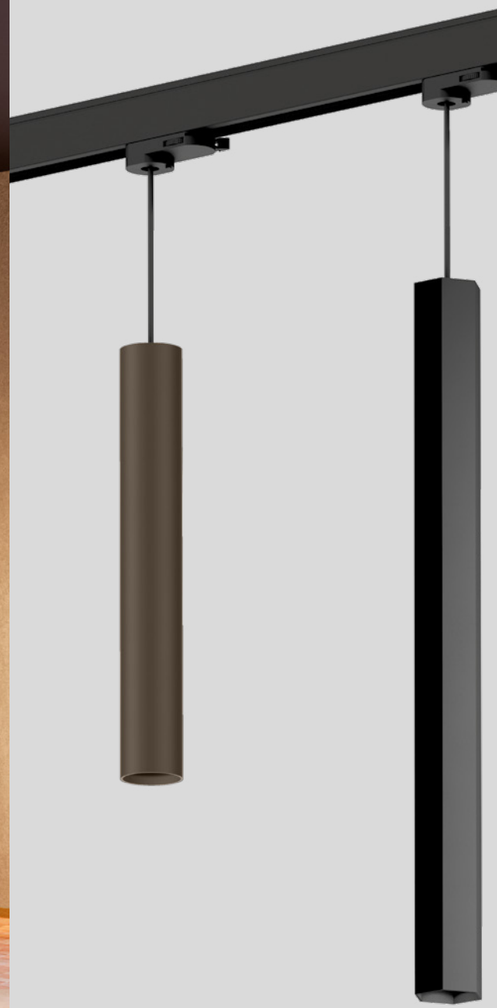

HEXO mini | RAY mini on track

3-Phase

243 | 247
505 | 507
531 | 535
611 | 613



HEXO MINI 3.0 | 5.0

PAR11 max. 12W | GU10
220-240VAC | 50-60Hz
aluminium
3-phase track adapter

IP20

3.0

300mm	CODE
	259520M0
	259520Q0
	259520B0


5.0

500mm	CODE
	259620M0
	259620Q0
	259620B0

OPTIONAL

PAR11 4.3W | GU10 | phase-cut dim

	CODE
2700K | 225lm	901128B3
3000K | 235lm	901128B5



RAY MINI 3.0 | 5.0

PAR11 max. 12W | GU10
220-240VAC | 50-60Hz
aluminium
3-phase track adapter
W and LS – white cable/adapter
others – black cable/adapter

IP20

3.0

300mm	CODE
	260520W0
	260520LS0
	260520Q0
	260520B0

5.0

500mm	CODE
	260620W0
	260620LS0
	260620Q0
	260620B0

OPTIONAL

PAR11 4.3W | GU10 | phase-cut dim

	CODE
2700K | 240lm	901128W3
2700K | 225lm	901128B3
3000K | 255lm	901128W5
3000K | 235lm	901128B5

back




PRIVATE RESIDENCE | INTERNI 21.11 ITALY



HEXO | RAY on track

3-Phase



HEXO 3.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
3-phase track adapter

IP20

3.0


300mm	CODE
	215420G0
	215420Q0
	215420P0
	215420B0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 440lm	901228B3
3000K | 460lm	901228B5

more lamps and info on page 905



RAY 2.0 | 3.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
3-phase track adapter
W fixtures – white cable/adapter
others – black cable/adapter

IP20

2.0

200mm	CODE
	217320W0
	217320G0
	217320M0
	217320Q0
	217320P0
	217320B0

3.0

300mm	CODE
	217420W0
	217420G0
	217420M0
	217420Q0
	217420P0
	217420B0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905

245 | 251
533 | 537
615
759
805



DIN SONNBERG IM MÜHLKREIS | AUSTRIA

reddot winner 2021

ROOMOR OFFICE on track


3-Phase

293

499







1.0 MICROPRISMATIC

LED PCB 35W | DALI-2
220-240VAC | 50-60Hz
aluminium
microprismatic PMMA cover
3-phase track adapter incl. driver

IP20 L80|60K UGR ≤ 19

	CODE
	1684M5W_
	1684M5B_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	3660	>90	5
4000K	3660	>90	7

UGR ≤ 19
65°≤ 3000cd
microprismatic

1.0 OPAL

LED PCB 35W | DALI-2
220-240VAC | 50-60Hz
aluminium | opal PMMA cover
3-phase track adapter incl. driver

IP20 L80|60K


	CODE
	168485W_
	168485B_


LIGHT COLOUR	LUMEN	CRI	CODE
3000K	3700	>90	5
4000K	3700	>90	7


back


QUBBY SYSTEM

Ceiling suspended

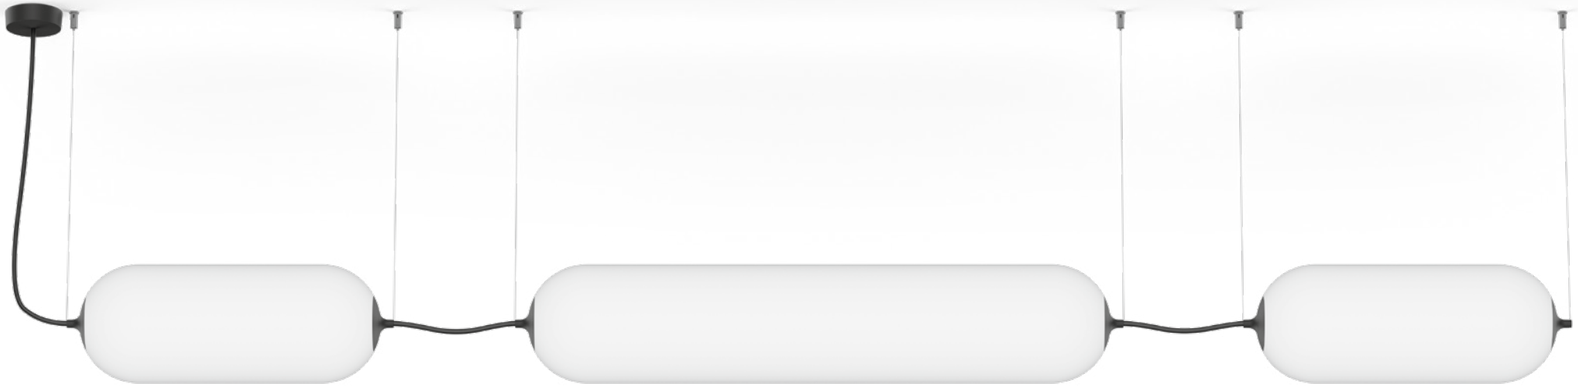







1.0

LED PCB 16W | DALI-2 DT8
220-240VAC | 50-60Hz
aluminium | opal polyethylene
incl. suspension set
default light colour 3500K

IP20 L80|100K

2700K-5000K| CRI >90 | 1250lm

CODE
916215B9

2.0

LED PCB 22W | DALI-2 DT8
220-240VAC | 50-60Hz
aluminium | opal polyethylene
incl. suspension set
default light colour 3500K

IP20 L80|100K

2700K-5000K| CRI >90 | 2500lm

CODE
916225B9

3.0

LED PCB 35W | DALI-2 DT8
220-240VAC | 50-60Hz
aluminium | opal polyethylene
incl. suspension set
default light colour 3500K

IP20 L80|100K

2700K-5000K| CRI >90 | 4500lm

CODE
916235B9


B | BASE

W/H ø97x28
polypropylene

CODE
914231B0

CONNECTOR

included in **1.0 | 2.0 | 3.0**

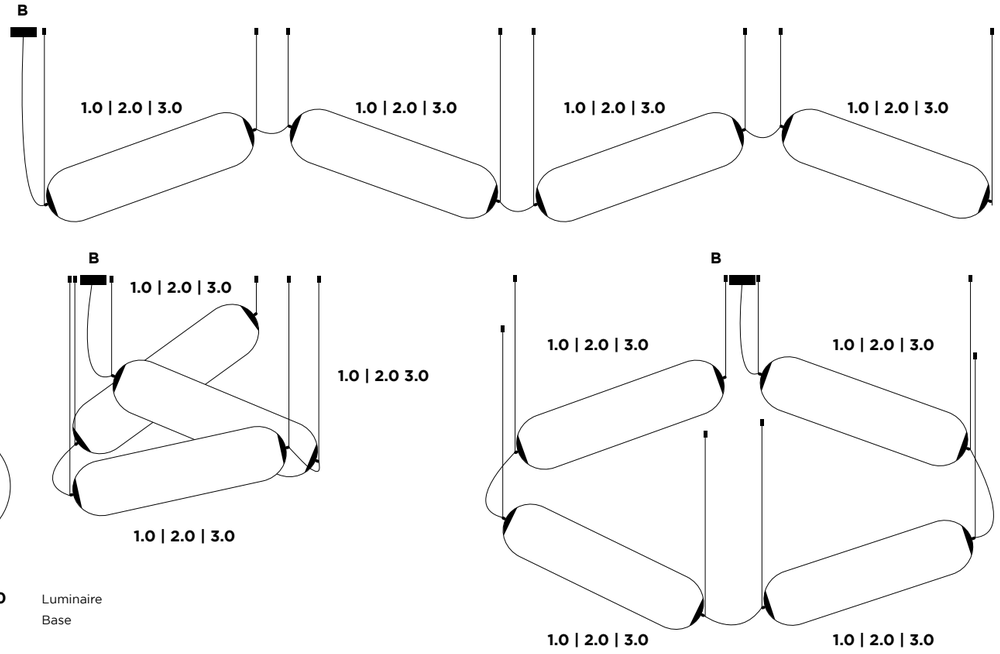


1.0 | 2.0 | 3.0 Luminaire
B Base


KEEP IN MIND WHEN PLANNING YOUR SYSTEM


Please be aware that the maximum length of the QUBBY System cannot be longer then 80m or max. 40 luminaires.



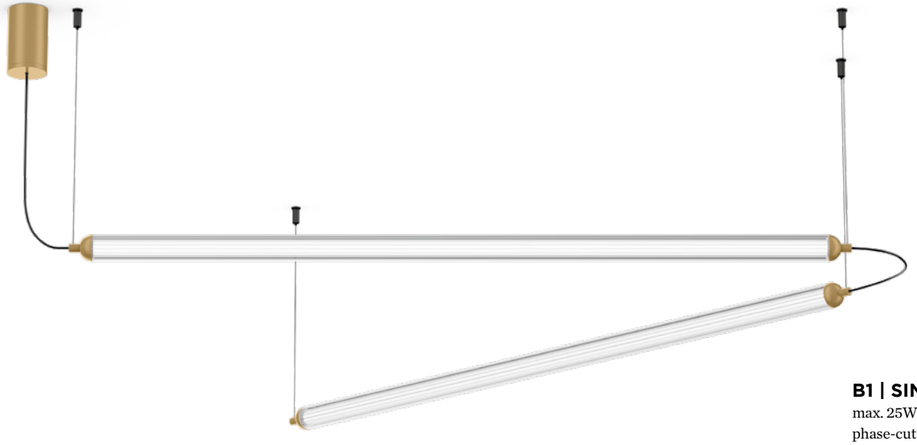







1.0

LED strip 8W
aluminium | ribbed glass

IP20 L80|50K

	CODE
	269182M_
	269182B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1035	>90	3
3000K	1065	>90	5

2.0

LED strip 12W
aluminium | ribbed glass

IP20 L80|50K

	CODE
	269282M_
	269282B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1555	>90	3
3000K	1600	>90	5

3.0

LED strip 15W
aluminium | ribbed glass

IP20 L80|50K

	CODE
	269382M_
	269382B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2070	>90	3
3000K	2130	>90	5

B1 | SINGLE/MULTI BASE

max. 25W | const. volt. | 24V
phase-cut dim | W/H ø62x102
polycarbonate

	CODE
	914224M0
	914224B0

B2 | MULTI BASE

max. 50W | const. volt. | 24V
phase-cut dim | W/H ø200x38
polycarbonate

	CODE
	914225M0
	914225B0

C | CABLE CONNECTOR


cable from one luminaire to another
incl. plugs


	CODE
0.3m	915210B0
0.6m	915211B0
0.9m	915212B0
1.2m	915213B0

D | FIX CONNECTOR


electrical | mechanical | straight
central suspension

	CODE
	915221B0

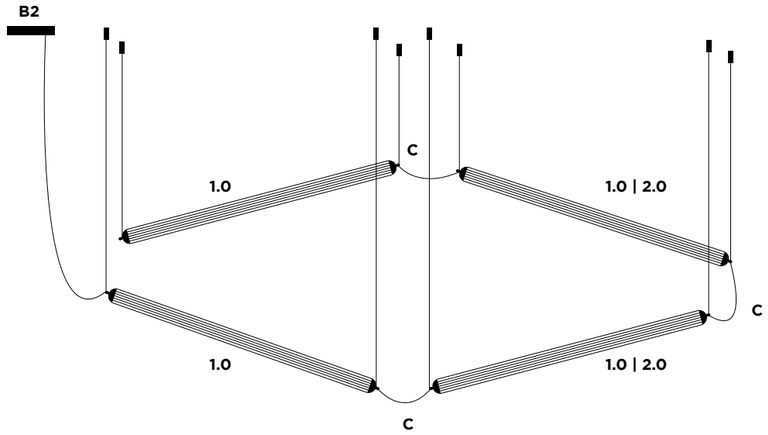

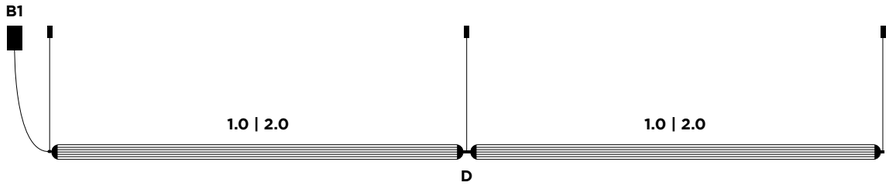

1.0 | 2.0 | 3.0	Luminaire
B1	Single/Multi Base
B2	Multi Base
C	Cable connector
D	Fix connector

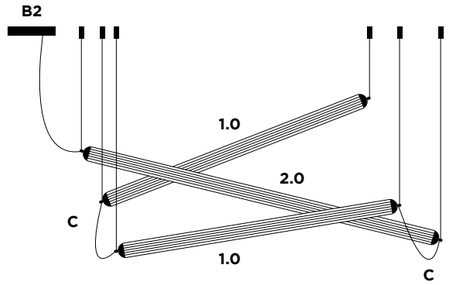


KEEP IN MIND WHEN PLANNING YOUR SYSTEM

Please be aware that the maximum wattage of the FLYRA System cannot be higher than 25W for B1 and 50W for B2 per System.

weverducre.com/flyra







1.0

LED PCB | dimmable
220-240VAC | 50-60Hz
aluminium | opal PMMA cover


IP20 L80|50K

phase-cut dim | 20W
3000K | CRI >90 | 1090lm

	CODE
	500384W5
	500384B5

DALI-2 | 22W | incl. driver
3000K | CRI >90 | 1090lm

	CODE
	500385W5
	500385B5



B | CONNECTOR POINT

phase-cut dim up to max. 4 fixtures
DALI up to max. 2 fixtures

	CODE
	900190W1
	900190B1

C | STEEL SUSPENSION CABLE

	CODE
2.0m	90015102

D1 | POWER FEEDER

for phase-cut dim | incl. steel suspension cable 2.0m | max. 10 luminaires per power feeder

	CODE
	90018010
	90018011


D2 | POWER FEEDER

for DALI | incl. steel suspension cable 2.0m | max. 10 luminaires per power feeder

	CODE
	90018012
	90018013


SURFACE EXAMPLES

configuration as seen from top view | minimum angle 45°

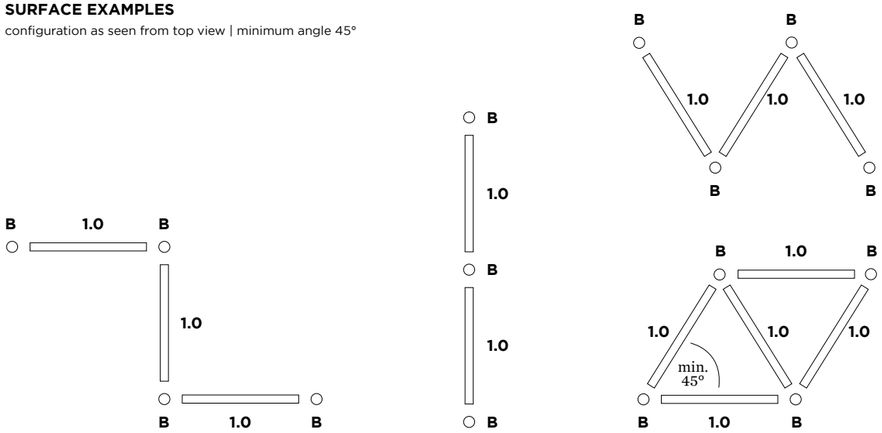


SUSPENDED EXAMPLES

configuration as seen from top view | minimum angle 45°
can be used up or down (direct or indirect)

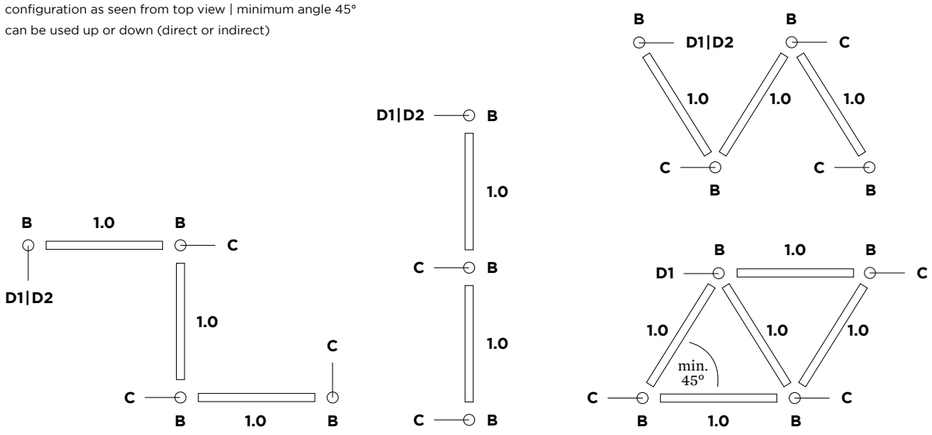




OFFICE KR PROPERTIES | 2A ARCHITECURAL GROUP

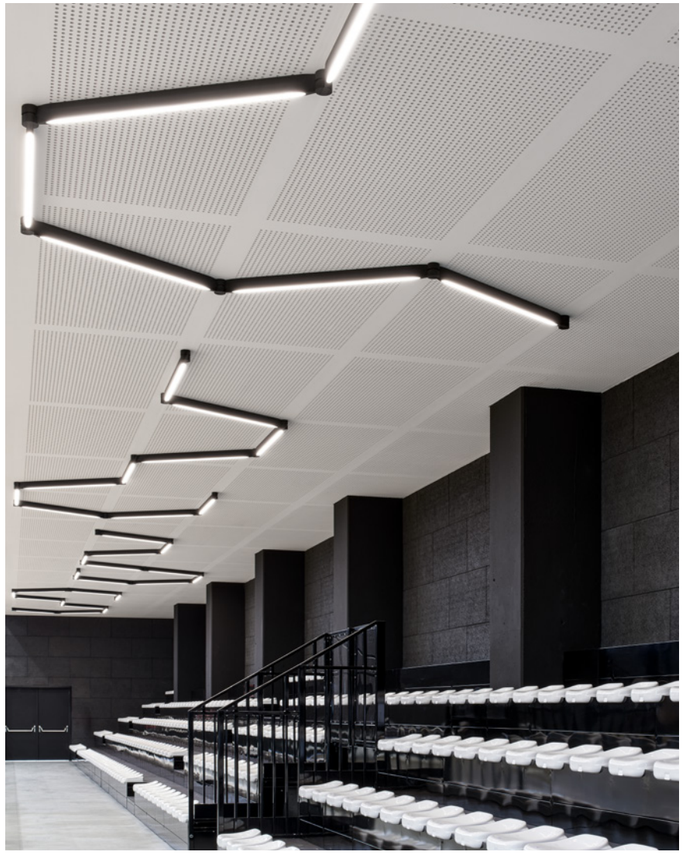

MATE SPORT HALL | IBL LIGHT & DESIGN THIENE | ITALY



PRIVATE RESIDENCE AUSTRIA

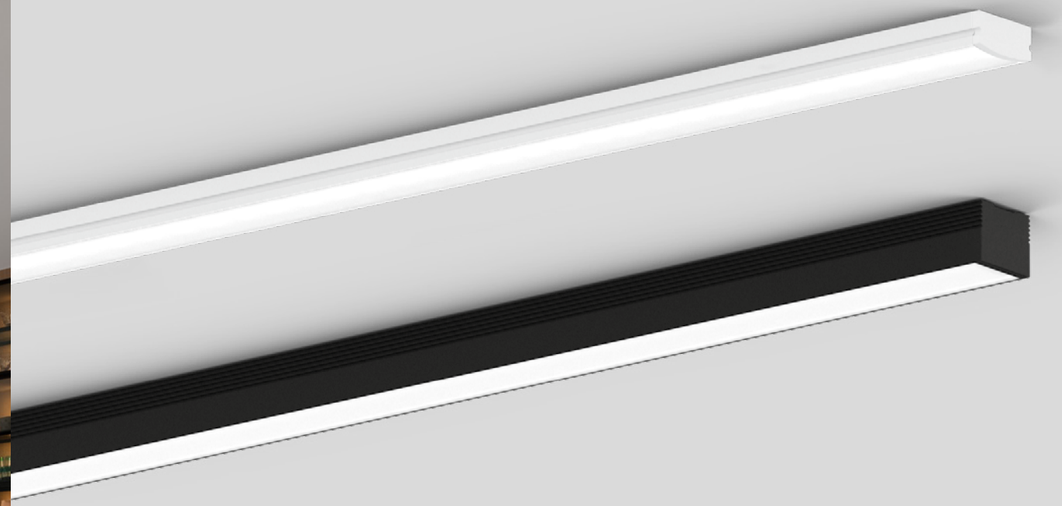


ILANE

Ceiling surface

1.0 PROFILE


aluminium | opal diffuser included
end caps and mounting clips



		CODE
	2m	911991W2
	2m	911991B2
	3m	911991W3
	3m	911991B3

2.0 PROFILE

aluminium | opal diffuser included
end caps and mounting clips



		CODE
	2m	911992W2
	2m	911992B2
	3m	911992W3
	3m	911992B3

ALWAYS USE

LED COB strip 24V | IP20
10W/m | 800lm/m

	CODE
20W | 2m	9003S21_
30W | 3m	9003S31_
50W | 5m	9003S41_

LED COB strip 24V | IP20
15W/m | 1250lm/m

	CODE
30W | 2m	9003S22_
45W | 3m	9003S32_
75W | 5m	9003S42_

LIGHT COLOUR	CRI	CODE
2700K	>90	3
3000K	>90	5

driver | 24V

	CODE
35W	90212801
100W	90212902
25W dim	90222701
50W dim	90222901

specs on page 901

ALWAYS USE

LED COB strip 24V | IP20
10W/m | 800lm/m

	CODE
20W | 2m	9003S21_
30W | 3m	9003S31_
50W | 5m	9003S41_

LED COB strip 24V | IP20
15W/m | 1250lm/m


	CODE
30W | 2m	9003S22_
45W | 3m	9003S32_
75W | 5m	9003S42_

LIGHT COLOUR	CRI	CODE
2700K	>90	3
3000K	>90	5

driver | 24V

	CODE
35W	90212801
100W	90212902
25W dim	90222701
50W dim	90222901

specs on page 901



for net output of LED strip on profiles,
check weverducre.com/ilane

OPTIONAL

Black diffuser | only for 1.0

	CODE
2m	911902B1
3m	911903B1

Double side tape for profile fixation

	CODE
3m	90019199

more accessories on page 916


back




PRIVATE RESIDENCE SPAIN

ILANE

Ceiling surface / recessed

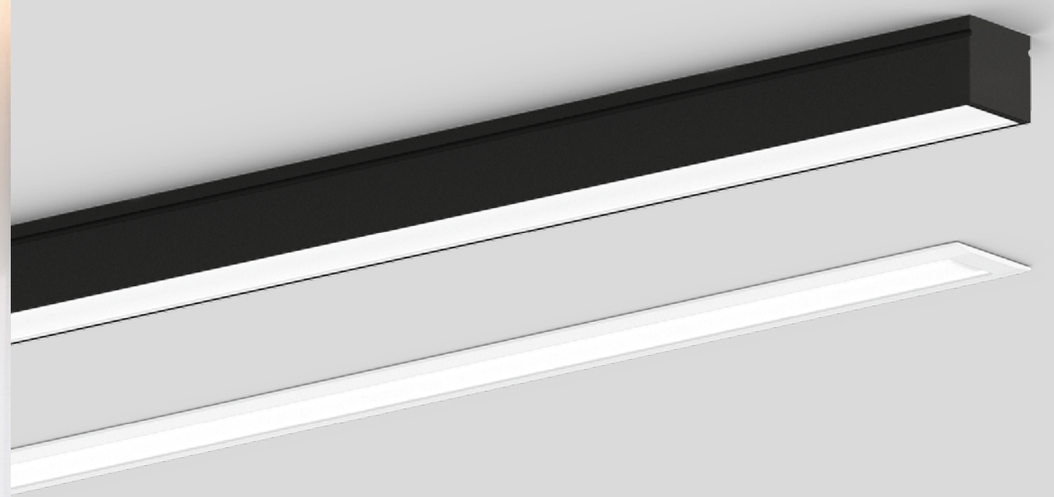



for net output of LED strip on profiles,
check weverducre.com/ilane

OPTIONAL

Black diffuser | only for 3.0

	CODE
2m	911912B1
3m	911913B1


Double side tape for profile fixation

	CODE
3m	90019199

more accessories on page 916

3.0 PROFILE

aluminium | opal diffuser included
end caps and mounting clips



		CODE
	2m	911993W2
	2m	911993B2
	3m	911993W3
	3m	911993B3

ALWAYS USE

LED COB strip 24V | IP20
10W/m | 800lm/m

	CODE
20W | 2m	9003S21_
30W | 3m	9003S31_
50W | 5m	9003S41_

LED COB strip 24V | IP20
15W/m | 1250lm/m

	CODE
30W | 2m	9003S22_
45W | 3m	9003S32_
75W | 5m	9003S42_

LIGHT COLOUR	CRI	CODE
2700K	>90	3
3000K	>90	5


driver | 24V

	CODE
35W	90212801
100W	90212902
25W dim	90222701
50W dim	90222901

specs on page 901

4.0 PROFILE

aluminium | opal diffuser included
end caps and mounting clips



		CODE
	2m	911994W2
	2m	911994B2
	3m	911994W3
	3m	911994B3

ALWAYS USE

LED COB strip 24V | IP20
10W/m | 800lm/m

	CODE
20W | 2m	9003S21_
30W | 3m	9003S31_
50W | 5m	9003S41_

LED COB strip 24V | IP20
15W/m | 1250lm/m

	CODE
30W | 2m	9003S22_
45W | 3m	9003S32_
75W | 5m	9003S42_

LIGHT COLOUR	CRI	CODE
2700K	>90	3
3000K	>90	5

driver | 24V

	CODE
35W	90212801
100W	90212902
25W dim	90222701
50W dim	90222901


specs on page 901

back

Ceiling suspended

412 – 565

SINGLE LUMINAIRES



MATCH LUSTA
415



TRACE CHANDELIER
417



NET
421



FINELLE
423

FLYRA
427

FINLIN
433



STUDO
437



FIL
441



DARF
445




SHEDDA
449



SHEDDA FRACTAL
451



KUJO
453



OPLIA CHANDELIER
457



QUBBY
459



GIGANT
461

SINGLE SUSPEN-SIONS

CONE
463

DRO
465



MIRRO
467



MIRRO SOFT
471



SPIRRA SOFT
475



WAVE SOFT
477



J.J.W.
479



WIRO
489



ROOMOR
495



ROOMOR OFFICE
499

CHOOSE YOUR BASE

LV more infos
on p. 500

COZY CONE
503

HEXO MINI
505

RAY MINI
507

MATCH
509

TRACE
511



ODREY
517

OPLIA
521



SOLLI
523




SOLLI COCOON
525

CHOOSE YOUR BASE

HV more infos
on p. 528

HEXO MINI
531



HEXO
533

RAY MINI
535

RAY
537

ODREY
539



TRACE 2.0
547

WETRO
549


CLEA
557


SHIEK
561


DINOR
563


MATCH LUSTA


Ceiling suspended

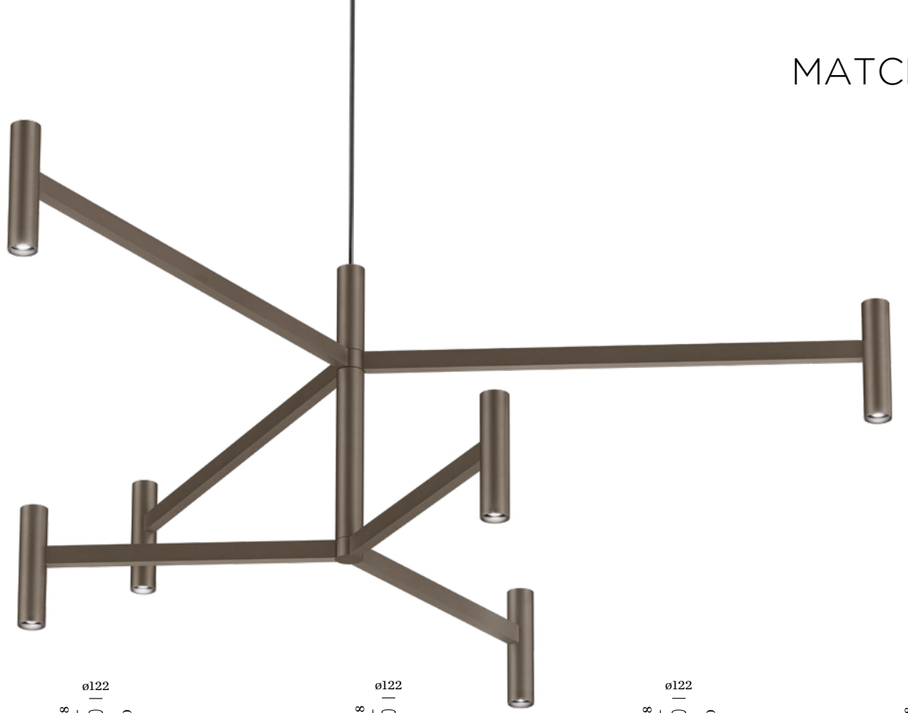









1.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-30° L80|50K

2700K | CRI >90 | 3x240lm

	CODE
	280154M3
	280154Q3
	280154B3

2.1

LED COB 18W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-30° L80|50K

2700K | CRI >90 | 6x240lm

	CODE
	280254M3
	280254Q3
	280254B3

3.2

LED COB 18W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-30°L80|50K

2700K | CRI >90 | 6x240lm

	CODE
	280354M3
	280354Q3
	280354B3

3.2.1

LED COB 26W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-30° L80|50K

2700K | CRI >90 | 9x240lm

	CODE
	280454M3
	280454Q3
	280454B3

61 | 137 | 153
193
329 | 347
571
589 | 685
723 | 729

back



PRIVATE RESIDENCE | RARDO ARCHITECTS SPAIN

DESIGN AWARD 2024

reddot winner 2023


TRACE CHANDELIER


Ceiling suspended

261 | 269 | 273

351

593 | 595

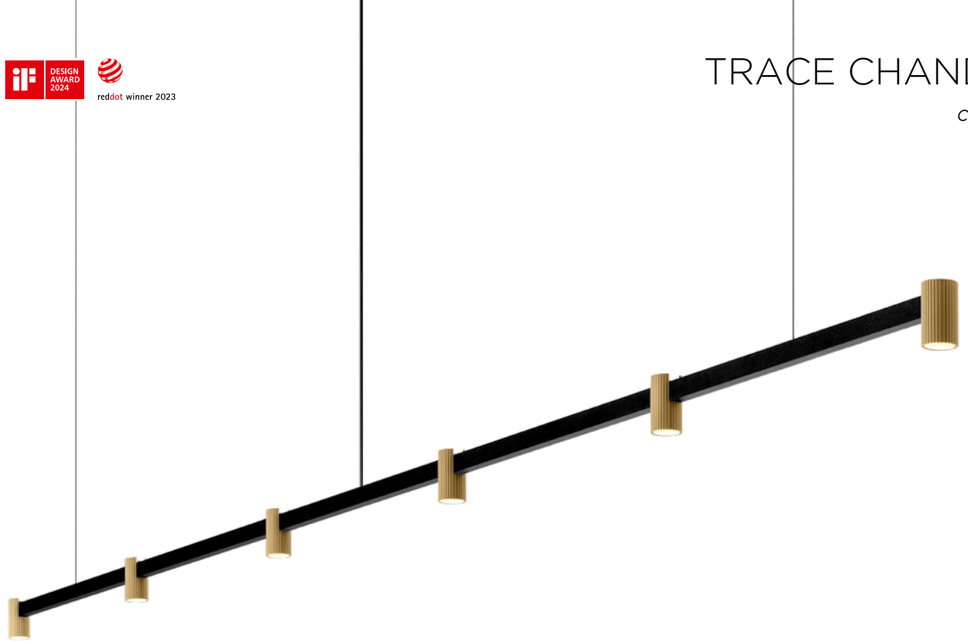




1.0

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-30° L80|50K

	CODE
	253564CH_
	253564B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	4x170	>90	3
3000K	4x180	>90	5




2.0

LED COB 16W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-30° L80|50K

	CODE
	253664CH_
	253664B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	6x180	>90	3
3000K	6x190	>90	5



3.0

LED COB 17W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium


IP20 M-30° L80|50K

	CODE
	253764CH_
	253764B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	8x215	>90	3
3000K	8x225	>90	5

back



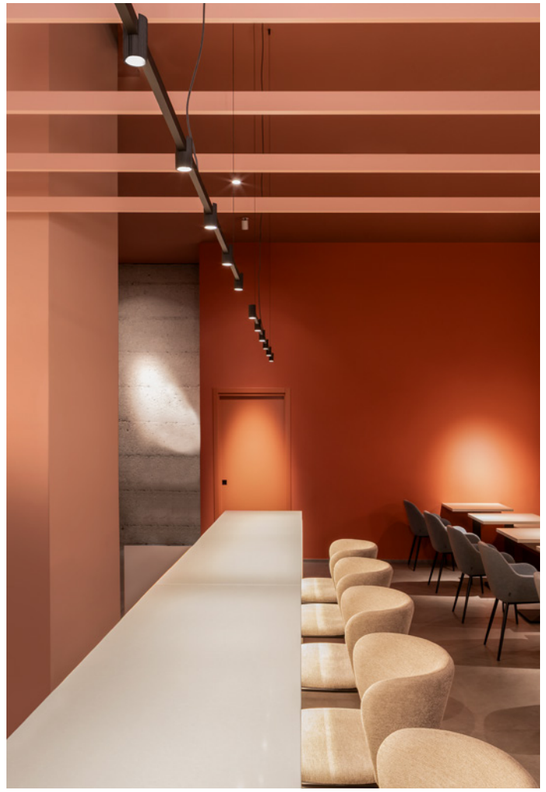


RESTAURANT L'APERICENA TIME | ARCH. LEONARDO PORCELLI – STILEMI RIVAROLO CANAVESE | ITALY




PRIVATE RESIDENCE | SOFIE CHRISTIAENS BELGIUM

NET

Ceiling suspended

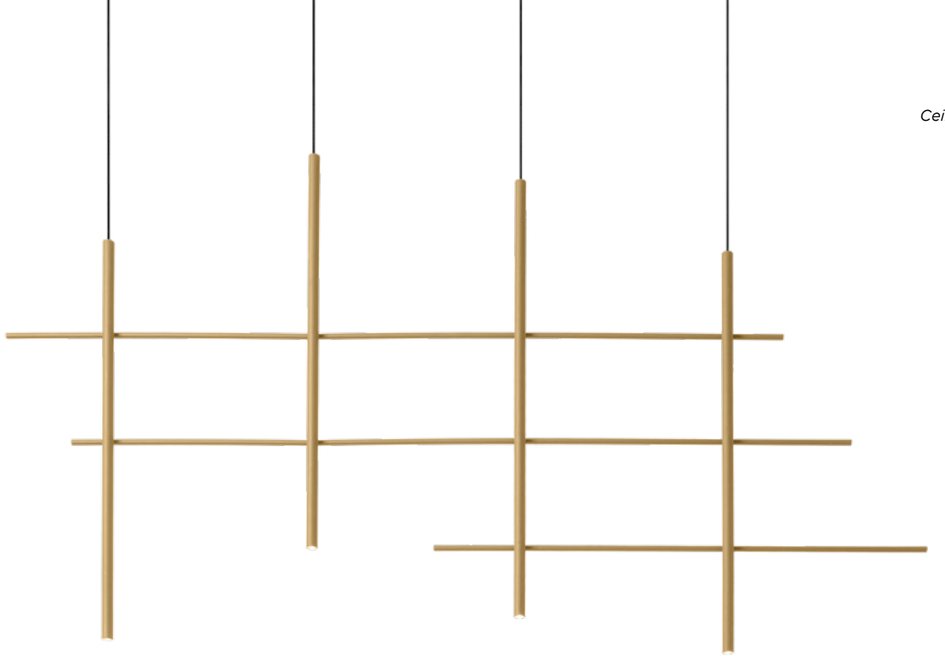




2.0

LED PCB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 W-85° L80|50K

2700K | CRI >90 | 2x235lm

	CODE
	231264W3
	231264M3
	231264B3



4.0

LED PCB 28W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 W-85° L80|50K

2700K | CRI >90 | 4x235lm


	CODE
	231464W3
	231464M3
	231464B3

back

FINELLE

Ceiling suspended





1.0


LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | ribbed glass

IP20 L80|100K

2700K | CRI >90 | 1040lm

	CODE
	272184M3
	272184B3

back

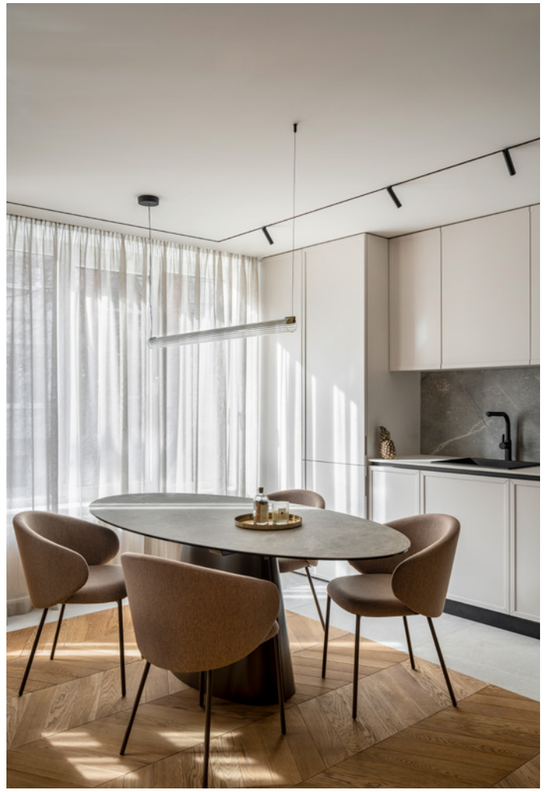


PRIVATE RESIDENCE | EN-TRE STUDIO BULGARIA




FLYRA

Ceiling suspended

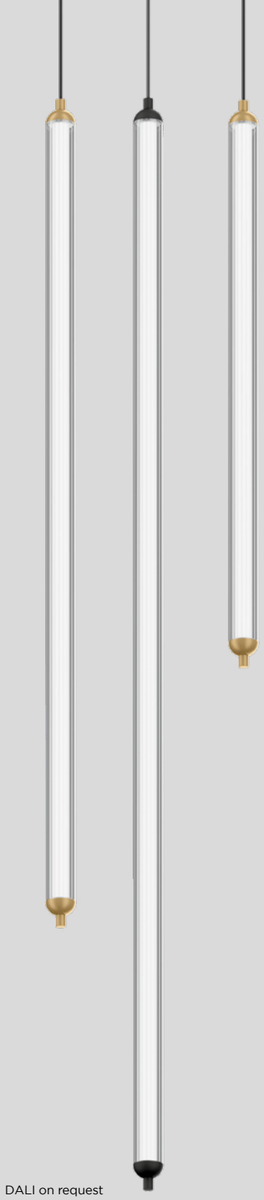

DALI on request




1.1 VERTICAL

LED strip 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | ribbed glass

IP20 L80|50K

	CODE
	249184M_
	249184B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	710	>90	3
3000K	730	>90	5



1.2 VERTICAL

LED strip 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | ribbed glass

IP20 L80|50K

	CODE
	249284M_
	249284B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1065	>90	3
3000K	1095	>90	5



1.3 VERTICAL

LED strip 16W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | ribbed glass

IP20 L80|50K

	CODE
	249384M_
	249384B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1420	>90	3
3000K	1460	>90	5


back



FLYRA

Ceiling suspended

401

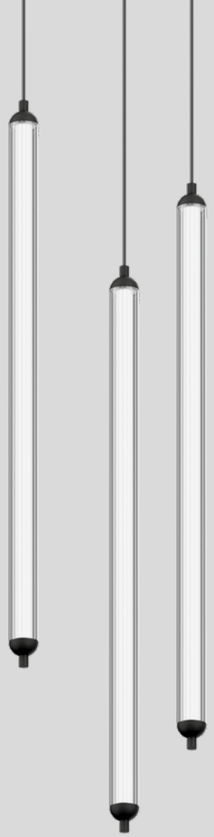




3.1 VERTICAL

LED strip 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | ribbed glass

IP20 L80|50K

	CODE
	449184BM_
	449184BB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	965	>90	3
3000K	995	>90	5




3.3 VERTICAL

LED strip 18W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | ribbed glass

IP20 L80|50K

	CODE
	449284BM_
	449284BB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1450	>90	3
3000K	1490	>90	5



6.3 VERTICAL

LED strip 35W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | ribbed glass

IP20 L80|50K

	CODE
	449384BM_
	449384BB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2900	>90	3
3000K	2985	>90	5


back

FLYRA

Ceiling suspended

401






1.1 HORIZONTAL

LED strip 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | ribbed glass

IP20 L80|50K

	CODE
	269184M_
	269184B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	710	>90	3
3000K	730	>90	5




1.2 HORIZONTAL

LED strip 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | ribbed glass

IP20 L80|50K

	CODE
	269284M_
	269284B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1065	>90	3
3000K	1095	>90	5



1.3 HORIZONTAL

LED strip 18W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | ribbed glass

IP20 L80|50K

	CODE
	269384M_
	269384B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1420	>90	3
3000K	1460	>90	5

DALI on request

back





DESIGN AWARD 2024

reddot winner 2023


FINLIN


Ceiling suspended


263

673 | 679

727







1.0

LED PCB 5W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser

IP20 L80|50K

		CODE
	2.5m	270184CH_
	2.5m	270184B_
	10m	270484B5

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	450	>90	3
3000K	485	>90	5

2.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser

IP20 L80|50K

		CODE
	2.5m	270284CH_
	2.5m	270284B_
	10m	270584B5

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	675	>90	3
3000K	730	>90	5

3.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser

IP20 L80|50K

		CODE
	2.5m	270384CH_
	2.5m	270384B_
	10m	270684B5

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	900	>90	3
3000K	975	>90	5

OPTIONAL

cover plate adapter for concrete housing

	CODE
	900194B0

back


studo

STUDO HELPS YOU OUT

STUDO shows how versatile a luminaire can be: five suspension options make this ultra-slim pendant a flexible all-rounder. Its aluminium profile with a powerful reflector and flat textile cable creates a clean, minimalist look – perfect for offices or kitchens.

STUDO zeigt, wie vielseitig eine Leuchte sein kann: Fünf verschiedene Abhängungen machen die ultraschlanke Pendelleuchte zum flexiblen Allrounder. Ihr Aluminiumprofil mit leistungsstarkem Reflektor und flachem Textilkabel sorgt für eine klare, minimalistische Optik – perfekt für Büro oder Küche.




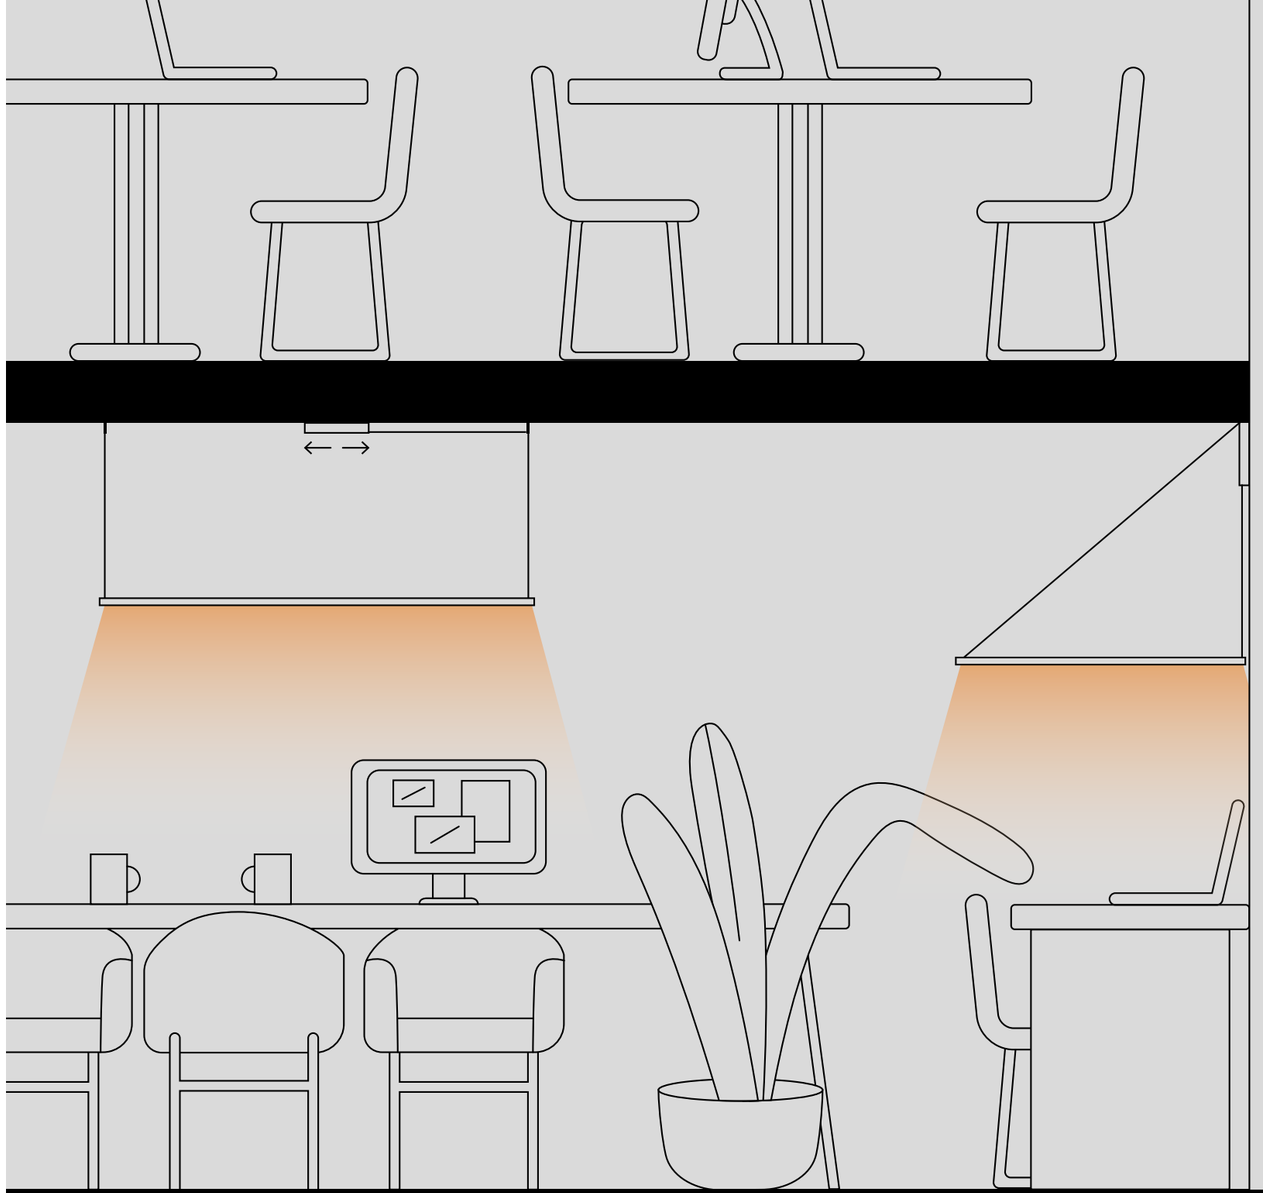


STUDO

Ceiling suspended







1.0

LED PCB 18W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | polycarbonate
suspension textile belt
incl. 2 ceiling brackets

IP20 W-67° L80|100K

3000K | CRI >90 | 1750lm

	CODE
	195174W5
	195174B5

2.0

LED PCB 27W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | polycarbonate
suspension textile belt
incl. 2 ceiling brackets

IP20 W-67° L80|100K

3000K | CRI >90 | 2700lm

	CODE
	195274W5
	195274B5

UGR ≤ 19
65°≤ 3000cd

back







PRIVATE RESIDENCE | STUDIO BRASS THE NETHERLANDS


FIL

Ceiling suspended

267
681

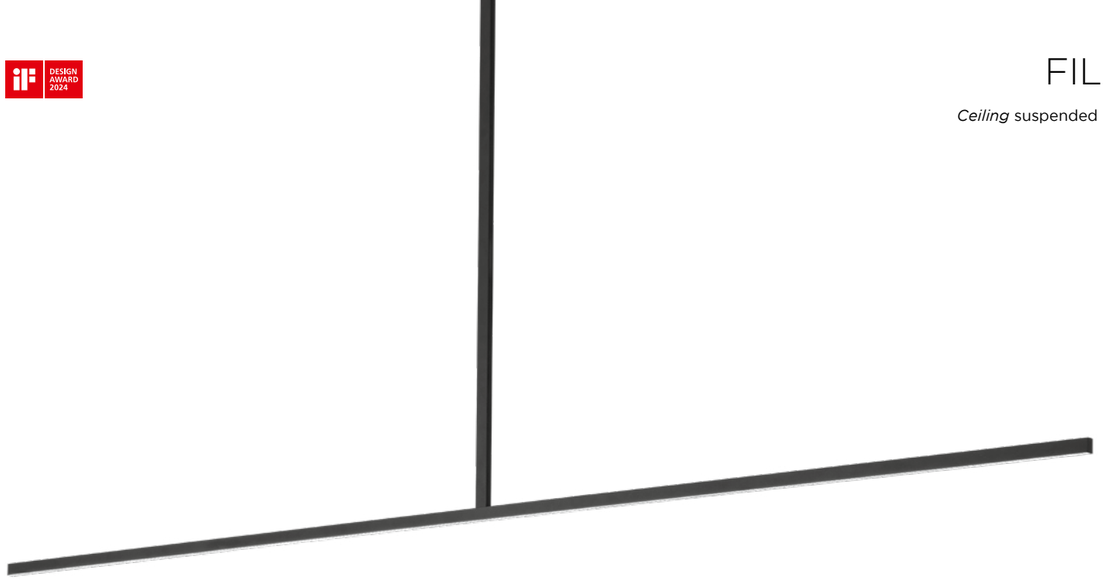





1.0

LED PCB 22W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 L80|50K

	CODE
	2543M4B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1070	>90	3
3000K	1120	>90	5

2.0

LED PCB 26W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 L80|50K

	CODE
	2544M4B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1280	>90	3
3000K	1340	>90	5





back






PRIVATE RESIDENCE | RICCARDO ROSSI SWITZERLAND




BENEDICTION | KKOL STUDIO SEOUL | SOUTH KOREA

DARF

Ceiling suspended

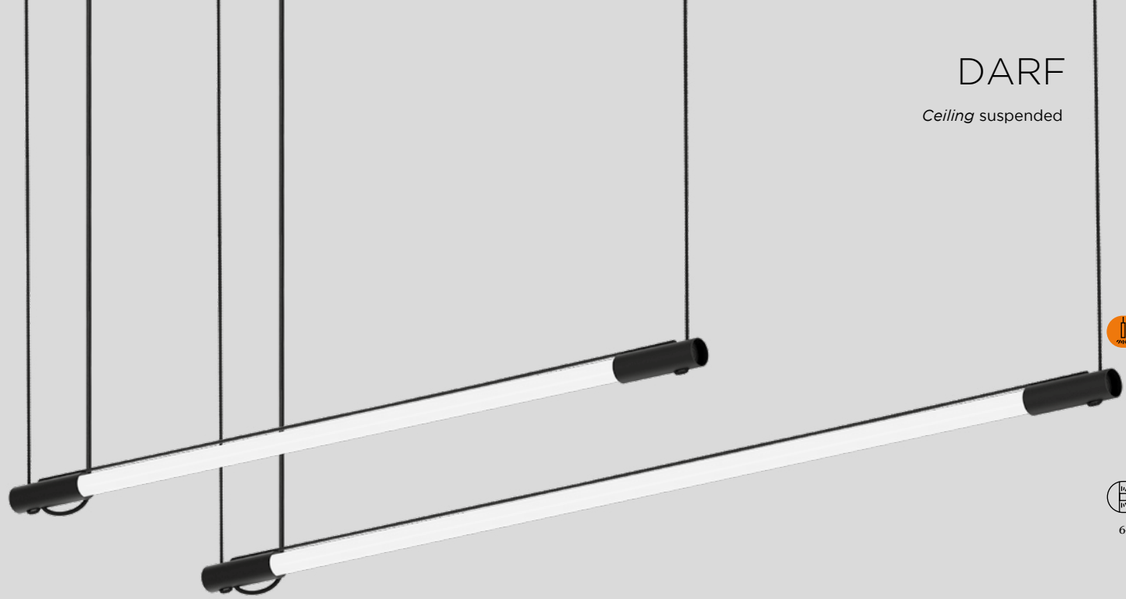

643




2.1

LED TUBE 10W | non dim
220-240VAC | 50-60Hz
aluminium | black textile cable

IP20 L70|75K

3000K | CRI >80 | 1530lm

	CODE
	2565T7B4




3.1

LED TUBE 14W | non dim
220-240VAC | 50-60Hz
aluminium | black textile cable

IP20 L70|75K

3000K | CRI >80 | 2300lm

	CODE
	2564T7B4




4.1

LED TUBE 22W | non dim
220-240VAC | 50-60Hz
aluminium | black textile cable

IP20 L70|60K

	CODE
	2568T7B_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	3560	>80	4
4000K	3950	>80	6



4.2

LED TUBE 23W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | black textile cable

IP20 L70|60K

	CODE
	2568T8B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2780	>90	3
3000K	2940	>90	5

ARCHITECT | PHILIPP WEINBERGER & STUDIO MARCH GUT

back





▶ **DESIGN WITH LOVE**


MOTTO PILATES | STUDIO WOLF OFFENBACH | GERMANY





SHEDDA

Ceiling suspended




1.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white luminaire – coloured shade

IP20 L80|100K

	CODE
	242184LS_
	242184SG_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	565	>90	3
3000K	580	>90	5



2.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white luminaire – coloured shade

IP20 L80|100K


	CODE
	242284LS_
	242284SG_


LIGHT COLOUR	LUMEN	CRI	CODE
2700K	565	>90	3
3000K	580	>90	5

back

SHEDDA fractal

Ceiling suspended

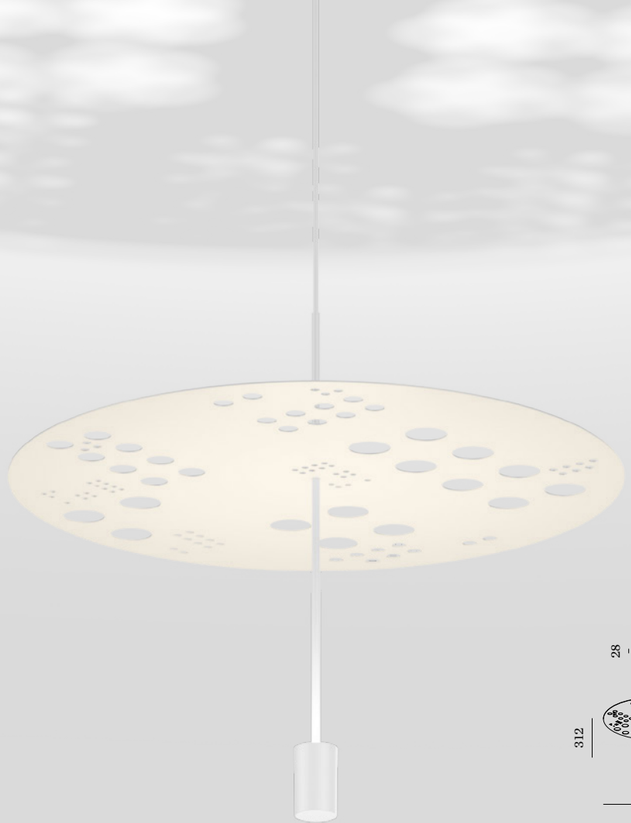




1.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white luminaire – coloured shade

IP20 L80|100K

	CODE
	242684LS_
	242684SG_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	565	>90	3
3000K	580	>90	5



2.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white luminaire – coloured shade

IP20 L80|100K

	CODE
	242784LS_
	242784SG_


LIGHT COLOUR	LUMEN	CRI	CODE
2700K	565	>90	3
3000K	580	>90	5





KUJO

Ceiling suspended









1.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | silicone cover
base in matching colour

IP20 L80|100K

	CODE
	273184W_
	273184SG_
	273184M_
	273184Q_
	273184B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	755	>90	3
3000K	800	>90	5

2.0

LED PCB 15W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | silicone cover
base in matching colour

IP20 L80|100K

	CODE
	273284W_
	273284SG_
	273284M_
	273284Q_
	273284B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1140	>90	3
3000K	1175	>90	5

3.0

LED PCB 19W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | silicone cover
base in matching colour

IP20 L80|100K

	CODE
	273384W_
	273384SG_
	273384M_
	273384Q_
	273384B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1520	>90	3
3000K	1565	>90	5

white fixtures – white cable/silver steel wire | SG fixtures – SG cable/silver steel wire | others – black cable/steel wire
DALI on request


back





KUJO

Ceiling suspended









2.1

LED PCB 34W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | silicone cover
base in matching colour

IP20 L80|100K

	CODE
	273484W_
	273484SG_
	273484M_
	273484Q_
	273484B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1940	>90	3
3000K	2000	>90	5

3.2

LED PCB 48W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | silicone cover
base in matching colour

IP20 L80|100K

	CODE
	273684W_
	273684SG_
	273684M_
	273684Q_
	273684B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2720	>90	3
3000K	2800	>90	5

3.2.1

LED PCB 60W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | silicone cover
base in matching colour

IP20 L80|100K

	CODE
	273784W_
	273784SG_
	273784M_
	273784Q_
	273784B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	3490	>90	3
3000K	3595	>90	5

white fixtures – white cable/0.3m connector/silver steel wire | SG fixtures – SG cable/0.3m connector/steel wire
others – black cable/0.3m connector/ black steel wire
other connectors on page 921


back





OPLIA CHANDELIER

Ceiling suspended

357

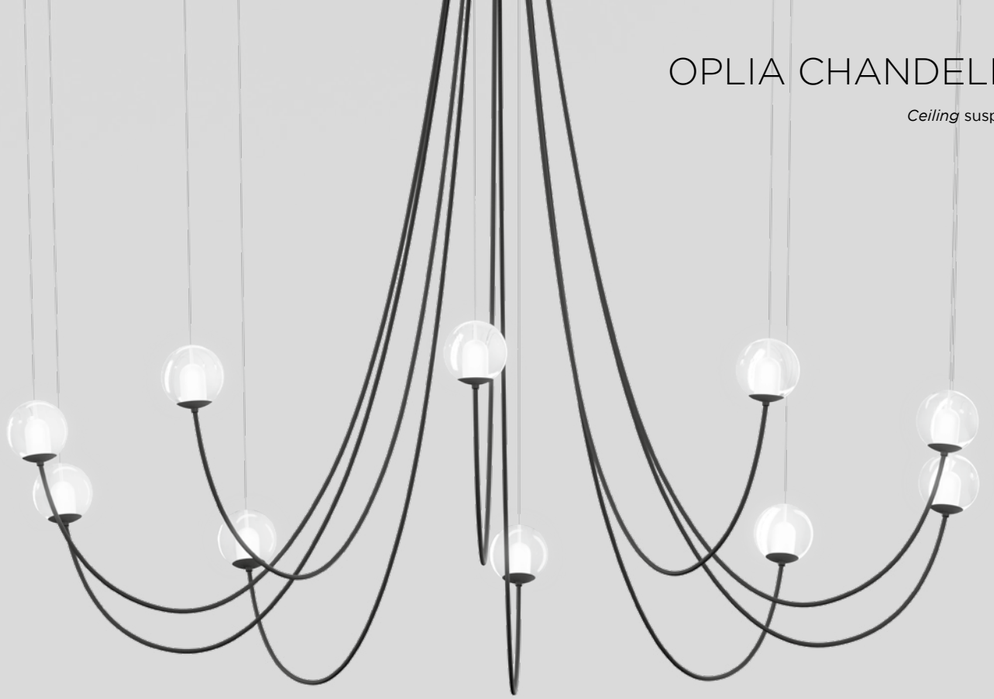





1.0

LED PCB 29W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | glass
white fixture – white cable
black fixture – black cable

IP20 L80|100K

2700K| CRI >90 | 2000lm

	CODE
	246584W3
	246584B3


2.0

LED PCB 29W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | glass
white fixture – white cable
black fixture – black cable

IP20 L80|100K

2700K| CRI >90 | 2000lm

	CODE
	246684W3
	246684B3






back





QUBBY

Ceiling suspended



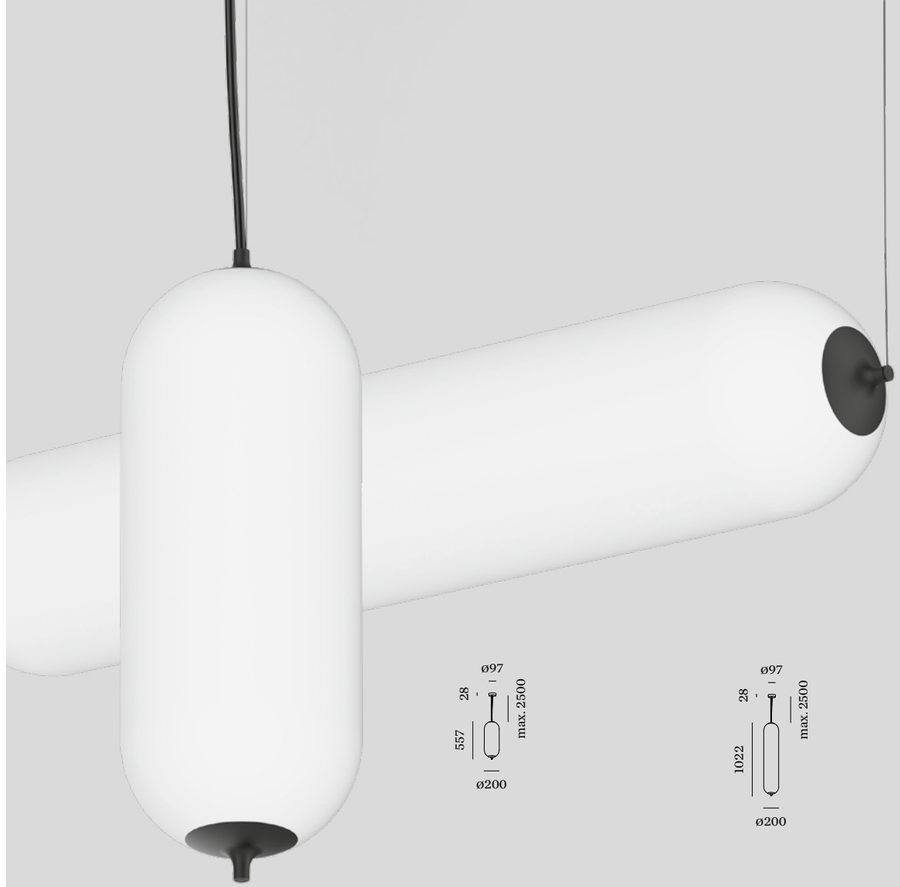







1.0

LED PCB 16W | DALI-2 DT8
220-240VAC | 50-60Hz | incl. driver
aluminium | opal polyethylene
incl. suspension set
default light colour 3500K

IP20 L80|100K

2700K-5000K| CRI >90 | 1250lm

CODE

251185B9

2.0

LED PCB 22W | DALI-2 DT8
220-240VAC | 50-60Hz | incl. driver
aluminium | opal polyethylene
incl. suspension set
default light colour 3500K

IP20 L80|100K

2700K-5000K| CRI >90 | 2500lm

CODE

251285B9

3.0

LED PCB 35W | DALI-2 DT8
220-240VAC | 50-60Hz | incl. driver
aluminium | opal polyethylene
incl. suspension set
default light colour 3500K

IP20 L80|100K

2700K-5000K| CRI >90 | 4500lm

CODE

251385B9

S&R CORNELISSEN

back





OFFICE NNE | OVER BYEN COPENHAGEN | DENMARK

GIGANT

Ceiling suspended







10.0

LED PCB 43W | DALI-2 | switch dim
220-240VAC | 50-60Hz | incl. driver
steel | opal LLDPE body | UL 94
HB std.glow wire test 630°

IP20 L80|60K

3000K | CRI >80 | 5330lm

	CODE
	213385W4

4000K | CRI >80 | 5670lm

	CODE
	213385W6

OPTIONAL

	CODE
suspension set 4m	90015114

longer suspension on request

16.0

LED PCB 85W | DALI-2 | switch dim
220-240VAC | 50-60Hz | incl. driver
steel | opal LLDPE body | UL 94
HB std.glow wire test 630°

IP20 L80|60K

3000K | CRI >80 | 10700lm

	CODE
	213485W4

4000K | CRI >80 | 11300lm

	CODE
	213485W6


OPTIONAL


	CODE
suspension set 4m	90015114

longer suspension on request

CONE

Ceiling suspended

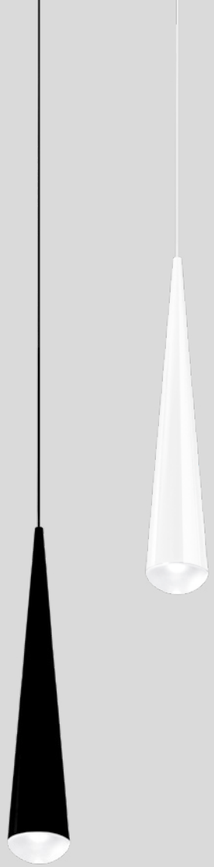



1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | chrome plated | glass

IP20 M-38° L80|60K

2700K | CRI >90 | 405lm

	CODE
	200184W3
	200184B3

back




PASTRY SHOP WITTAMER BRUSSELS I BELGIUM

DRO

Ceiling suspended



279
373
623
715 | 731



1.0

QT14 max. 5W | G9
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass


IP20

CODE
2521G0WB0

OPTIONAL

QT14 3.5W | G9 | phase-cut dim clear

CODE
2700K | 340lm 9010G803
3000K | 350lm 9010G805



2.0

C35 max. 6W | E14
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass


IP20

CODE
2522C0WB0

OPTIONAL

C35 5.5W | E14 | phase-cut dim | opal

CODE
2700K | 450lm 9003C103



3.0

A60 max. 12W | E27
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass


IP20

CODE
2523E0WB0

OPTIONAL

A60 9W | E27 | phase-cut dim | opal

CODE
2700K | 800lm 9003E152



4.0

A65 max. 15W | E27
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass

IP20

CODE
2524E0WB0

OPTIONAL

A65 14.6W | E27 | phase-cut dim | opal

CODE
2700K | 1375lm 9003E153





HAUS BRINA | PRO URBAN AG DÜSSELDORF | GERMANY

MIRRO

Ceiling suspended









1.0

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | one side reflective
composite panel

IP20

	CODE
	6341E0GB0
	6341E0NB0
	6341E0LB0
	6341E0BL0

2.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | one side reflective
composite panel

IP20

	CODE
	6342E0GB0
	6342E0NB0
	6342E0LB0
	6342E0BL0

3.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | one side reflective
composite panel

IP20

	CODE
	6343E0GB0
	6343E0NB0
	6343E0LB0
	6343E0BL0









MORE VERSIONS ONLINE
weverducre.com/more-mirro

OPTIONAL

A60 5.5W | E27 | phase-cut dim
gold mirror

	CODE
2700K | 405lm	9003E139

A60 5.5W | E27 | phase-cut dim
silver mirror

	CODE
2700K | 405lm	9003E140

OPTIONAL

G95 5W | E27 | phase-cut dim
gold mirror

	CODE
2200K | 370lm	9003E156
2700K | 410lm	9003E142

G95 5W | E27 | phase-cut dim
silver mirror

	CODE
2700K | 395lm	9003E157

OPTIONAL

G95 5W | E27 | phase-cut dim
gold mirror

	CODE
2200K | 370lm	9003E156
2700K | 410lm	9003E142

G95 5W | E27 | phase-cut dim
silver mirror

	CODE
2700K | 395lm	9003E157






JOHN REED FITNESS GRAZ | AUSTRIA




MIRRO SOFT

Ceiling suspended







2.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | PET felt material
noise absorbing material

IP20

	CODE
	6342E0MF0
	6342E0LF0
	6342E0IF0
	6342E0AF0

OPTIONAL

G95 5W | E27 | phase-cut dim
gold mirror

	CODE
2200K | 370lm	9003E156
2700K | 410lm	9003E142

G95 5W | E27 | phase-cut dim
silver mirror

	CODE
2700K | 395lm	9003E157

G95 10W | E27 | phase-cut dim | opal

	CODE
2700K | 1060lm	9003E163

G95 4.5W | E27 | phase-cut dim | clear

	CODE
2700K | 375lm	9003E160

3.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | PET felt material
noise absorbing material

IP20

	CODE
	6343E0MF0
	6343E0LF0
	6343E0IF0
	6343E0AF0

OPTIONAL

G95 5W | E27 | phase-cut dim
gold mirror

	CODE
2200K | 370lm	9003E156
2700K | 410lm	9003E142

G95 5W | E27 | phase-cut dim
silver mirror

	CODE
2700K | 395lm	9003E157

G95 10W | E27 | phase-cut dim | opal

	CODE
2700K | 1060lm	9003E163

G95 4.5W | E27 | phase-cut dim | clear

	CODE
2700K | 375lm	9003E160

MORE VERSIONS ONLINE
weverducre.com/more-mirro

285

629

13&9 DESIGN

back





COMBINE IT WITH OTHER OPTIONS
weverducre.com/mirro





SPIRRA SOFT

Ceiling suspended

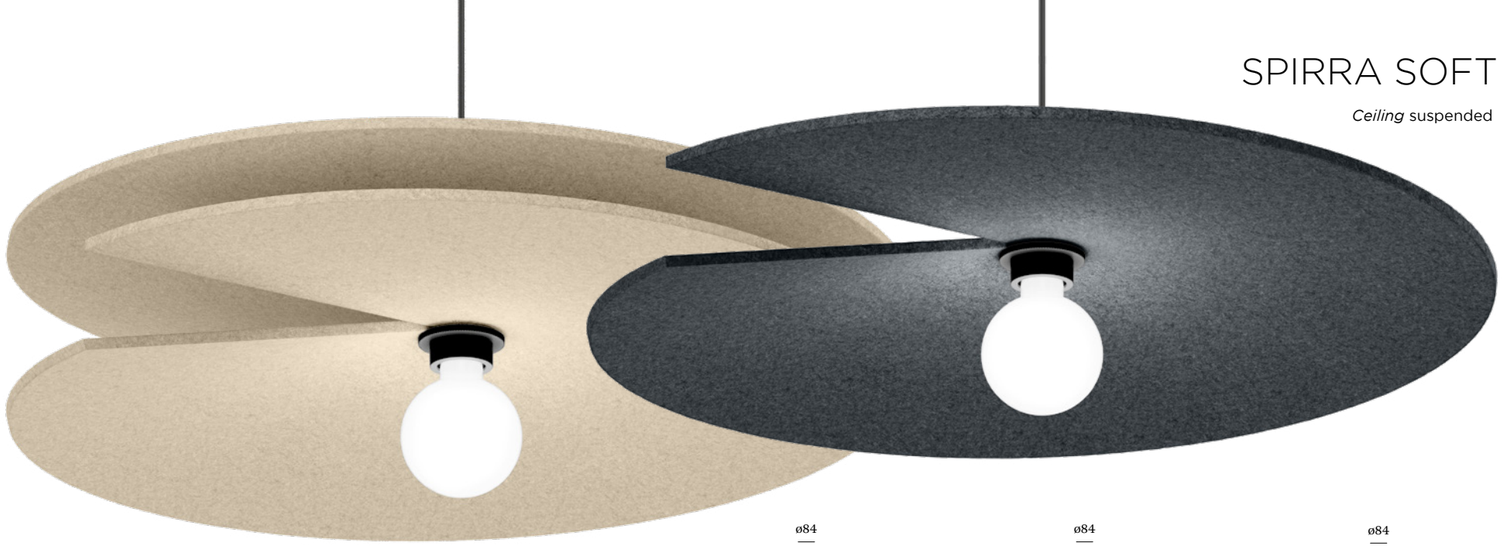







1.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | PET felt material
noise absorbing material

IP20

	CODE
	6351E0MF0
	6351E0LF0
	6351E0IF0
	6351E0AF0

OPTIONAL

G95 10W | E27 | phase-cut dim | opal

	CODE
2700K | 1060lm	9003E163

2.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | PET felt material
noise absorbing material

IP20

	CODE
	6352E0MF0
	6352E0LF0
	6352E0IF0
	6352E0AF0

OPTIONAL

G95 10W | E27 | phase-cut dim | opal

	CODE
2700K | 1060lm	9003E163

3.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | PET felt material
noise absorbing material

IP20

	CODE
	6353E0MF0
	6353E0LF0
	6353E0IF0
	6353E0AF0

OPTIONAL

G95 10W | E27 | phase-cut dim | opal

	CODE
2700K | 1060lm	9003E163

MORE VERSIONS ONLINE
weverducre.com/more-spirra-soft

13&9 DESIGN

back



WAVE SOFT

Ceiling suspended



1.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | PET felt material
noise absorbing material

IP20

	CODE
	6361E0MF0
	6361E0LF0
	6361E0IF0
	6361E0AF0

OPTIONAL

G95 10W | E27 | phase-cut dim | opal

	CODE
2700K | 1060lm	9003E163

2.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | PET felt material
noise absorbing material

IP20

	CODE
	6362E0MF0
	6362E0LF0
	6362E0IF0
	6362E0AF0

OPTIONAL

G95 10W | E27 | phase-cut dim | opal

	CODE
2700K | 1060lm	9003E163

3.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | PET felt material
noise absorbing material

IP20

	CODE
	6363E0MF0
	6363E0LF0
	6363E0IF0
	6363E0AF0

OPTIONAL

G95 10W | E27 | phase-cut dim | opal

	CODE
2700K | 1060lm	9003E163

MORE VERSIONS ONLINE
weverducre.com/more-wave-soft

13&9 DESIGN

back



EOAK FLOORS SHOWROOM | VIGONARCHITECTS HANOI | VIETNAM




JULES WABBES

J.J.W.

Ceiling suspended

289

633



04

6x A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium

IP20

	CODE
	2052E0S0
	2052E0G0

OPTIONAL

A60 3.8W | E27 | phase-cut dim
gold tinted

	CODE
2200K | 245lm	9003E109

A60 5.6W | E27 | phase-cut dim | clear

	CODE
2700K | 480lm	9003E138

back






J.J.W.

Ceiling suspended

289

633



042

6x A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium

IP20

	CODE
	2056E0S0
	2056E0G0

OPTIONAL

A60 3.8W | E27 | phase-cut dim
gold tinted

	CODE
2200K | 245lm	9003E109

A60 5.6W | E27 | phase-cut dim | clear

	CODE
2700K | 480lm	9003E138

MERCURE CHANTILLY | PROJECT MANAGED BY ATYPIO HOTELS RESORTS WITH ABP ARCHITECTS VINEUIL-SAINT-FIRMIN | FRANCE

JULES WABBES

back



MERCURE CHANTILLY | PROJECT MANAGED BY ATYPIO HOTELS RESORTS WITH ABP ARCHITECTS VINEUIL-SAINT-FIRMIN | FRANCE

back

▶ DESIGN WITH LOVE



MERCURE CHANTILLY | PROJECT MANAGED BY ATYPIO HOTELS RESORTS WITH ABP ARCHITECTS | L'OBSERVATOIRE DE LA NUIT VINEUIL-SAINT-FIRMIN | FRANCE



JULES WABBES


back

J.J.W.

Ceiling suspended

289

633



05

3x A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium

IP20

	CODE
	2053E0S0
	2053E0G0


OPTIONAL

A60 3.8W | E27 | phase-cut dim
gold tinted

	CODE
2200K | 245lm	9003E109

A60 5.6W | E27 | phase-cut dim | clear

	CODE
2700K | 480lm	9003E138

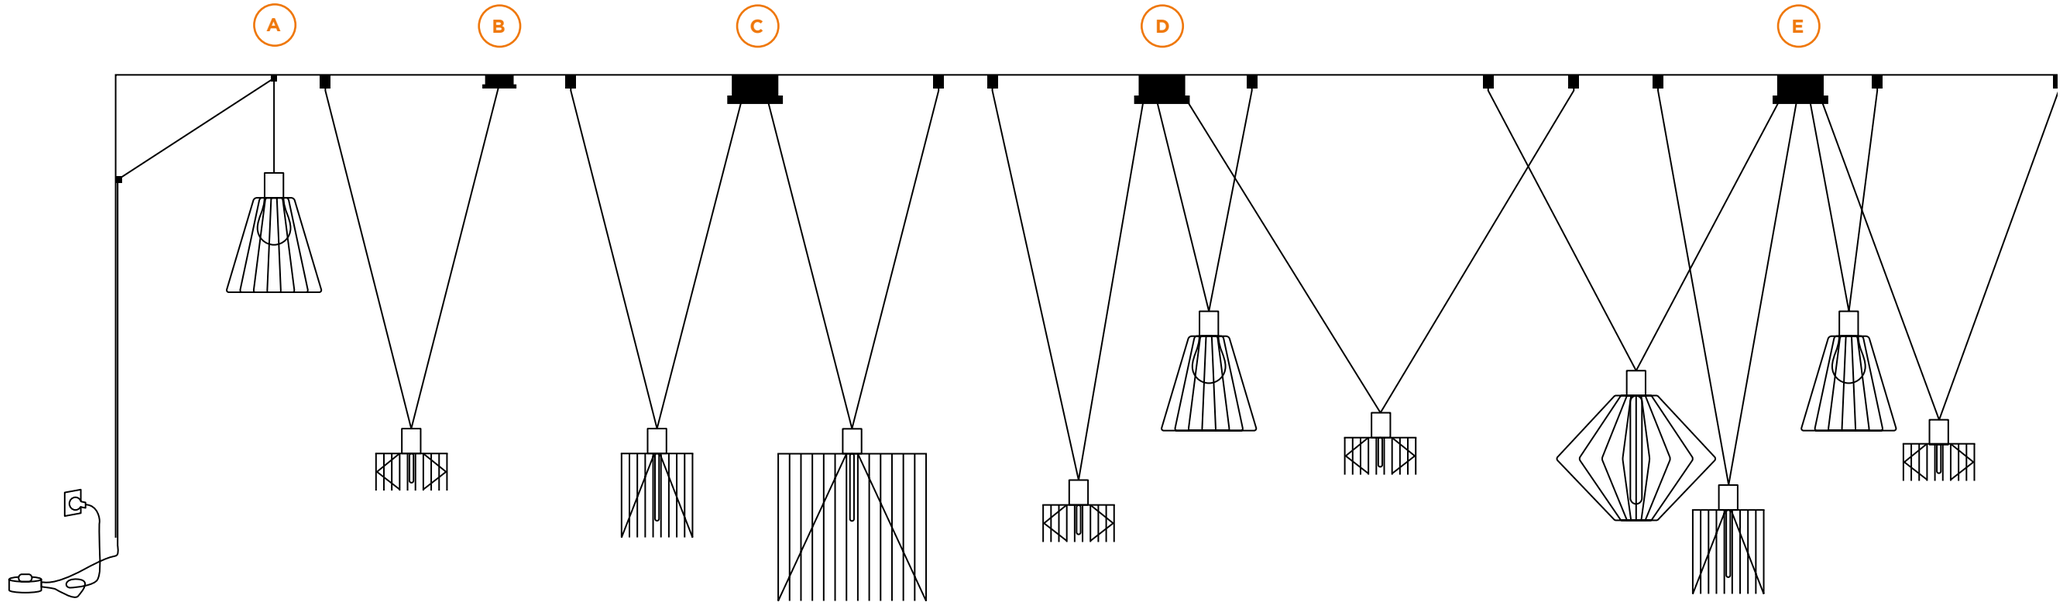


decenter











1.0 CONE

	CODE
	245100V0
	245100B0

2.0 WIRO

	CODE
	209600B0

1.8 WIRO

	CODE
	209200V0
	209200B0

3.8 WIRO

	CODE
	209300V0
	209300B0

1.1 DIAMOND

	CODE
	244100P0
	244100B0

A

CABLE PLUG AND PLAY

E27 LED 4-25W | connector set for one shade | black textile cable incl. cable plug with dimmer | 2 cable brackets included

	CODE
8.5m	90015165

B

DECENTER SET 1.0

A60 max. 60W | E27
220-240VAC | 50-60Hz
suspension set for 1 shade
round ceiling base | black textile cable
1 base + 1 end stop included

	CODE
2.6m	90052050
6m	90052051

C

DECENTER SET 2.0

2x A60 max. 60W | E27
220-240VAC | 50-60Hz
suspension set for 2 shades
round ceiling base | black textile cable
1 multibase + 2 end stops included

	CODE
2.6m	90052055
6m	90052056

D

DECENTER SET 3.0

3x A60 max. 60W | E27
220-240VAC | 50-60Hz
suspension set for 3 shades
round ceiling base | black textile cable
1 multibase + 3 end stops included

	CODE
2.6m	90052060
6m	90052063

E

DECENTER SET 4.0

4x A60 max. 60W | E27
220-240VAC | 50-60Hz
suspension set for 4 shades
round ceiling base | black textile cable
1 multibase + 4 end stops included

	CODE
2.6m	90052067
6m	90052078





RAIFFEISENBANK | BREM+ZEHNDER INNENARCHITEKTUR DIETIKON | SWITZERLAND

WIRO

Ceiling suspended

291

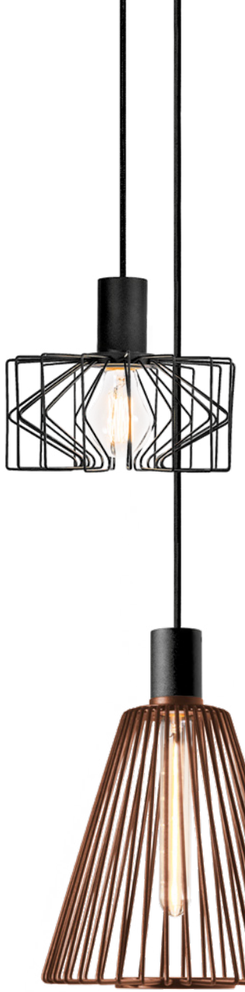



1.0 CONE

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel

IP20


	CODE
	2451E0V0
	2451E0B0

more suspension options on page 487

OPTIONAL

T30-225 5.3W | E27 | phase-cut dim
gold tinted

	CODE
2200K | 380lm	9003E129
2700K | 425lm	9003E136



2.0 WIRO

A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel

IP20

	CODE
	2096E0B0

more suspension options on page 487


OPTIONAL

A60 3.8W | E27 | phase-cut dim
gold tinted

	CODE
2200K | 245lm	9003E109

A60 5.6W | E27 | phase-cut dim | clear

	CODE
2700K | 480lm	9003E138



1.8 WIRO

A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel

IP20

	CODE
	2092E0V0
	2092E0B0

more suspension options on page 487

OPTIONAL

A60 3.8W | E27 | phase-cut dim
gold tinted

	CODE
2200K | 245lm	9003E109

A60 5.6W | E27 | phase-cut dim | clear

	CODE
2700K | 480lm	9003E138

T30-225 5.3W | E27 | phase-cut dim
gold tinted

	CODE
2200K | 380lm	9003E129
2700K | 425lm	9003E136

MORE VERSIONS ONLINE
weverducre.com/more-wiro

BERND STEINHUBER


back



PRIVATE RESIDENCE | STUDIO BENOIT BELGIUM

WIRO

Ceiling suspended



3.8

A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel

IP20

	CODE
	2093E0V0
	2093E0B0

more suspension options on page 487

OPTIONAL

A60 3.8W | E27 | phase-cut dim
gold tinted


	CODE
2200K | 245lm	9003E109

A60 5.6W | E27 | phase-cut dim | clear

	CODE
2700K | 480lm	9003E138

T30-225 5.3W | E27 | phase-cut dim
gold tinted

	CODE
2200K | 380lm	9003E129
2700K | 425lm	9003E136



6.1

A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel

IP20

	CODE
	2094E0V0
	2094E0B0

OPTIONAL

A60 3.8W | E27 | phase-cut dim
gold tinted


	CODE
2200K | 245lm	9003E109

A60 5.6W | E27 | phase-cut dim | clear

	CODE
2700K | 480lm	9003E138

T30-300 7.2W/7.4W | E27
phase-cut dim | gold tinted

	CODE
2200K | 585lm	9003E130
2700K | 610lm	9003E135



6.5

A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel

IP20

	CODE
	2095E0V0
	2095E0B0

OPTIONAL

A60 3.8W | E27 | phase-cut dim
gold tinted

	CODE
2200K | 245lm	9003E109

A60 5.6W | E27 | phase-cut dim | clear

	CODE
2700K | 480lm	9003E138

T30-300 7.2W/7.4W | E27
phase-cut dim | gold tinted

	CODE
2200K | 585lm	9003E130
2700K | 610lm	9003E135

MORE VERSIONS ONLINE
weverducre.com/more-wiro

BERND STEINHUBER

back




RESTAURANT QUEBRACHO STEAKHOUSE & MIXOLOGY | MICHELE MEZZINA PESCARA | ITALY

WIRO

Ceiling suspended





1.1 DIAMOND

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel

IP20


	CODE
	2441E0P0
	2441E0B0

more suspension options on page 487

OPTIONAL

T30-300 7.2W/7.4W | E27
phase-cut dim | gold tinted

	CODE
2200K | 585lm	9003E130
2700K | 610lm	9003E135



2.0 DIAMOND

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel


IP20

	CODE
	2292E0P0
	2292E0B0

OPTIONAL

T30-300 7.2W/7.4W | E27
phase-cut dim | gold tinted

	CODE
2200K | 585lm	9003E130
2700K | 610lm	9003E135



3.0 DIAMOND

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel

IP20

	CODE
	2293E0P0
	2293E0B0

OPTIONAL

T30-300 7.2W/7.4W | E27
phase-cut dim | gold tinted

	CODE
2200K | 585lm	9003E130
2700K | 610lm	9003E135


MORE VERSIONS ONLINE
weverducre.com/more-wiro

BERND STEINHUBER

back



APARTMENT RONDA SANT PERE | DANIEL NASSAR SPAIN

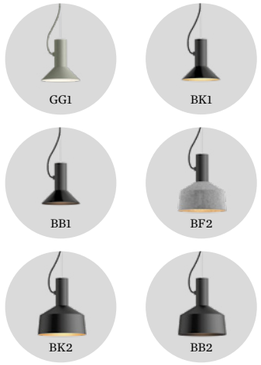



reddot award 2019
winner lighting design




ROOMOR

Ceiling suspended







1.1 PAR16

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

	CODE
	248120GG1
	248120BK1
	248120BB1

1.1 E27

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium

IP20

	CODE
	2481E0GG1
	2481E0BK1
	2481E0BB1

1.2 E27

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | grey felt

IP20

	CODE
	2481E0BF2
	2481E0BK2
	2481E0BB2

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905

OPTIONAL

A60 9W | E27 | phase-cut dim | opal

	CODE
2700K | 800lm	9003E152

OPTIONAL

A60 9W | E27 | phase-cut dim | opal

	CODE
2700K | 800lm	9003E152

MORE VERSIONS ONLINE
weverducre.com/more-roomor

back



ADESA | MARKEY & SCHELSTRAETE TIENEN | BELGIUM


BF3


BK3


BB3


BK4


BB4

reddot award 2019
winner lighting design



MORE VERSIONS ONLINE
weverducre.com/more-roomor

ROOMOR

Ceiling suspended

1.3

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | grey felt

IP20

	CODE
	2481E0BF3
	2481E0BK3
	2481E0BB3

OPTIONAL

A60 9W | E27 | phase-cut dim | opal

	CODE
2700K | 800lm	9003E152



1.4

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium

IP20

	CODE
	2481E0BK4
	2481E0BB4

OPTIONAL

A60 9W | E27 | phase-cut dim | opal

	CODE
2700K | 800lm	9003E152

639

725 | 735

back



LINK LAB CREATIVE OFFICE | STAY STUDIO KORTRIJK | BELGIUM

reddot winner 2021

ROOMOR OFFICE

Ceiling suspended

293

395







1.0 MICROPRISMATIC

LED PCB 35W | DALI-2 | push dim
220-240VAC | 50-60Hz | incl. driver
aluminium
microprismatic PMMA cover

IP20 L80|60K UGR ≤ 19

	CODE
	1681M5W_
	1681M5B_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	3660	>90	5
4000K	3660	>90	7


1.0 OPAL

LED PCB 35W | DALI-2 | push dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA cover

IP20 L80|60K

	CODE
	168185W_
	168185B_


LIGHT COLOUR	LUMEN	CRI	CODE
3000K	3700	>90	5
4000K	3700	>90	7



back

CHOOSE YOUR BASE

low

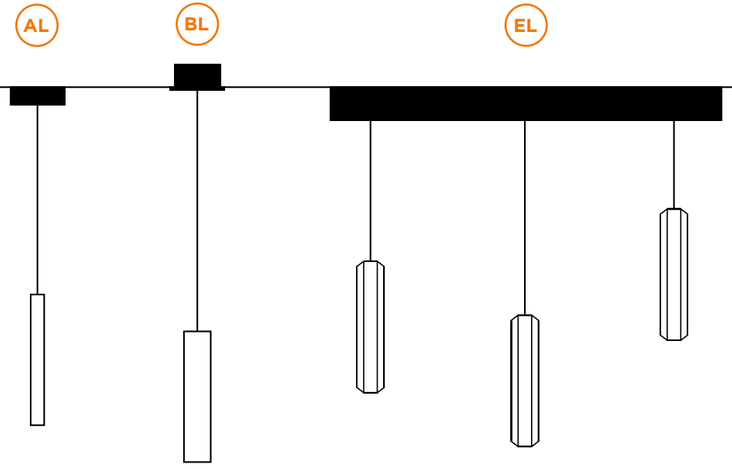

AL | SINGLE BASE
ceiling base round
phase-cut dim | 350mA | incl. driver

	CODE
	914112W0
	914112L0
	914112G0
	914112M0
	914112Q0
	914112B0

DALI versions on page 920

OPLIA
phase-cut dim | 250mA | incl. driver

	CODE
	914115W0
	914115M0
	914115B0

DALI versions on page 920

BL | SEMI RECESSED SINGLE BASE
phase-cut dim | 350mA | incl. driver

73-76 70 10-35

	CODE
	914152W0
	914152L0
	914152M0
	914152Q0
	914152B0

OPLIA
phase-cut dim | 250mA | incl. driver

	CODE
	914155W0
	914155M0
	914155B0

EL | MULTI BASE LINEAR
3, 6 or 9 luminaires | phase-cut dim
incl. driver | 175mA per luminaire
600mm | 1200mm | 1800mm

	CODE
for 3	914133W0
for 3	914133B0
for 6	914134W0
for 6	914134B0
for 9	914135W0
for 9	914135B0

GL | TRACK ADAPTER
for 3-phase tracks
phase-cut dim | 350mA | incl. driver


	CODE
	914173W0
	914173B0

DALI versions on page 920

OPLIA
phase-cut dim | 250mA | incl. driver

	CODE
	914171W0
	914171B0

DALI versions on page 920

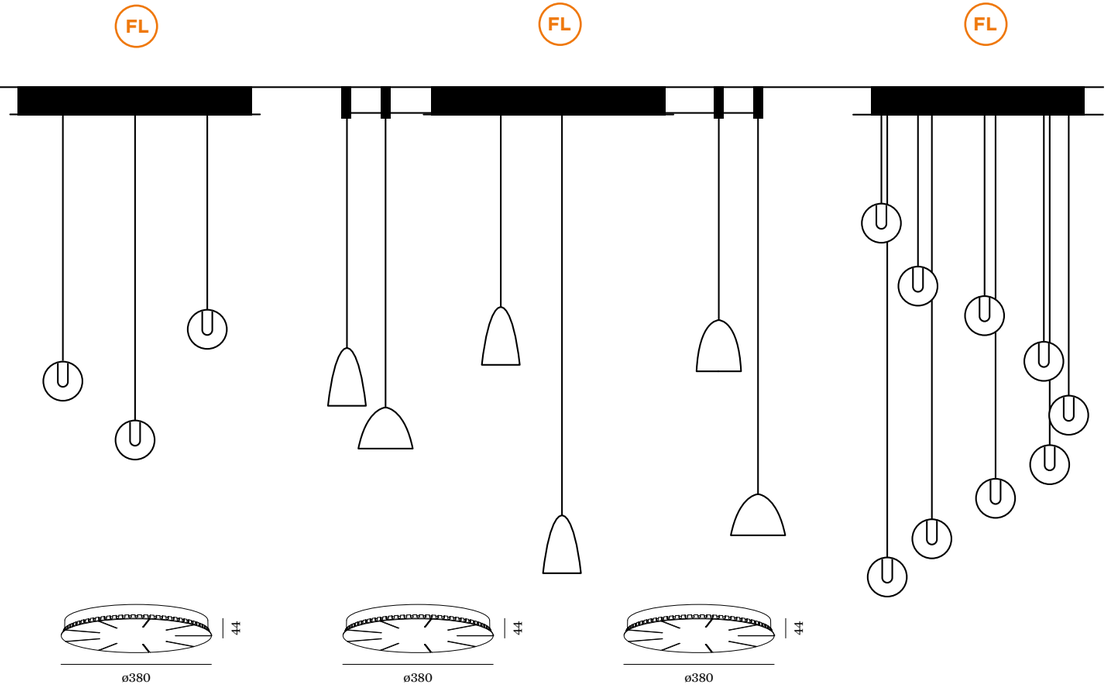

FL | MULTI CHANDELIER
3 luminaires | 3x175mA
phase-cut dim | incl. driver
COZY CONE | MATCH | TRACE
ODREY | OPLIA

	CODE
	914121WW0
	914121BL0
	914121BM0
	914121BQ0
	914121BB0

RAY MINI | HEXO MINI | SOLLI

	CODE
	914124WW0
	914124BL0
	914124BM0
	914124BQ0
	914124BB0

FL | MULTI CHANDELIER
6 luminaires | 6x175mA
phase-cut dim | incl. driver
COZY CONE | MATCH | TRACE
ODREY | OPLIA

	CODE
	914122WW0
	914122BL0
	914122BM0
	914122BQ0
	914122BB0

RAY MINI | HEXO MINI | SOLLI

	CODE
	914125WW0
	914125BL0
	914125BM0
	914125BQ0
	914125BB0

FL | MULTI CHANDELIER
9 luminaires | 9x175mA
phase-cut dim | incl. driver
COZY CONE | MATCH | TRACE
ODREY | OPLIA

	CODE
	914123WW0
	914123BL0
	914123BM0
	914123BQ0
	914123BB0

RAY MINI | HEXO MINI | SOLLI

	CODE
	914126WW0
	914126BL0
	914126BM0
	914126BQ0
	914126BB0

HOOK
optional for
FL | MULTI CHANDELIER

	CODE
	90052083
	90052084

more Multi chandelier options
on page 920

back



COZY CONE

Low voltage
Ceiling suspended





CHOOSE YOUR BASE

AL | Single base
ceiling base round | 350mA
phase-cut dim | incl. driver

	CODE
	914112W0
	914112L0
	914112B0



BL | Semi recessed single base
EL | Multi base linear

FL | Multi chandelier
6 luminaires | 6x175mA | 1440lm
phase-cut dim | incl. driver

	CODE
	914122WW0
	914122BL0
	914122BB0

GL | Track adapter
more infos on page 500

LOXONE VERSIONS ONLINE
weverducre.com/more-cozy-cone

1.0

LED COB 6W | 350mA | 18V
aluminium | glass
black and T fixtures – black cable
others – white cable

IP20 M-40° L80|50K

2700K | CRI >90 | 500lm

	CODE
	241161LS3
	241161SG3
	241161FJ3
	241161T3
	241161B3



2.0

LED COB 6W | 350mA | 18V
aluminium | glass
black and T fixtures – black cable
others – white cable

IP20 M-40° L80|50K

2700K | CRI >90 | 510lm

	CODE
	241261LS3
	241261SG3
	241261FJ3
	241261T3
	241261B3



3.0

LED COB 6W | 350mA | 18V
aluminium | glass
black and T fixtures – black cable
others – white cable

IP20 M-40° L80|50K

2700K | CRI >90 | 545lm


	CODE
	241361LS3
	241361SG3
	241361FJ3
	241361T3
	241361B3

back



HEXO mini

Low voltage
Ceiling suspended

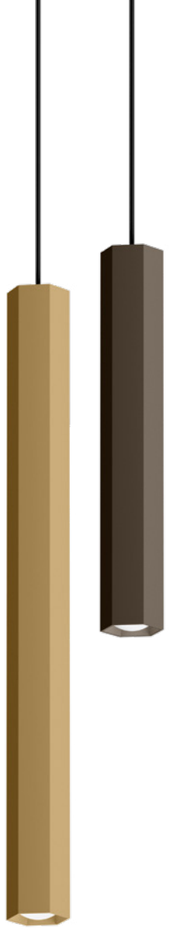



243





375 | 391





611





CHOOSE YOUR BASE

AL | Single base
ceiling base round | 350mA
phase-cut dim | incl. driver

	CODE
	914112M0
	914112Q0
	914112B0

BL | Semi recessed single base
EL | Multi base linear
FL | Multi chandelier
GL | Track adapter
more infos on page 500

LOXONE VERSIONS ONLINE
weverducre.com/more-hexo

3.0

LED COB 6W | 350mA | 18V
aluminium

IP20 W-75° L80|50K

	CODE
	259171M_
	259171Q_
	259171B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	525	>90	3
3000K	565	>90	5

5.0

LED COB 6W | 350mA | 18V
aluminium


IP20 W-75° L80|50K

	CODE
	259271M_
	259271Q_
	259271B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	525	>90	3
3000K	565	>90	5

back




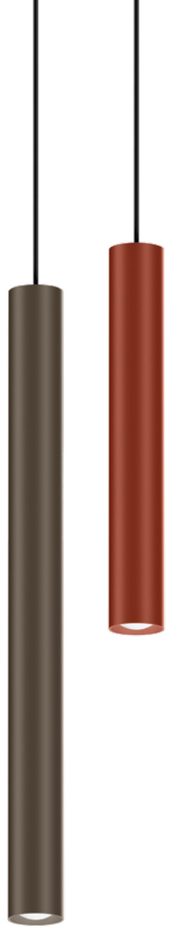


RAY mini

Low voltage
Ceiling suspended







CHOOSE YOUR BASE

AL | Single base
ceiling base round | 350mA
phase-cut dim | incl. driver

CODE
914112W0
914112Q0
914112B0

BL | Semi recessed single base
EL | Multi base linear
FL | Multi chandelier
GL | Track adapter
more infos on page 500

LOXONE VERSIONS ONLINE
weverducre.com/more-ray

3.0

LED COB 6W | 350mA | 18V
aluminium
white and LS fixtures –white cable
others – black cable

IP20 W-75° L80|50K

CODE
260171W_
260171LS_
260171ME_
260171Q_
260171B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	525	>90	3
3000K	565	>90	5

5.0

LED COB 6W | 350mA | 18V
aluminium
white and LS fixtures –white cable
others – black cable

IP20 W-75° L80|50K

CODE
260271W_
260271LS_
260271Q_
260271B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	525	>90	3
3000K	565	>90	5


back



DESIGN AWARD 2023 · GOOD DESIGN · reddot winner 2023


MATCH

Low voltage
Ceiling suspended









CHOOSE YOUR BASE

AL | Single base
ceiling base round | 350mA
phase-cut dim | incl. driver

	CODE
	914112W0
	914112L0
	914112M0
	914112Q0
	914112B0

BL | Semi recessed single base

EL | Multi base linear
3 luminaires | 3x175mA | 525mm
phase-cut dim | incl. driver

	CODE
	914133W0
	914133B0

FL | Multi chandelier
GL | Track adapter
more infos on page 500



MORE VERSIONS + LOXONE ONLINE
weverducre.com/more-match-suspended

3.0

LED COB 6W | 350mA | 18V
aluminium
white fixtures – white cable
others – black cable

IP20 W-54° L80|50K

	CODE
	279271W_
	279271L_
	279271M_
	279271Q_
	279271B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	490	>90	3
3000K	520	>90	5

5.0

LED COB 6W | 350mA | 18V
aluminium
white fixtures – white cable
others – black cable

IP20 W-54° L80|50K

	CODE
	279371W_
	279371L_
	279371M_
	279371Q_
	279371B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	490	>90	3
3000K	520	>90	5

back



PRIVATE RESIDENCE | IN LIJN INTERIEUR ARCHITECTUUR BELGIUM

DESIGN AWARD 2024

reddot winner 2023



LOXONE VERSIONS ONLINE
weverducre.com/more-trace-suspended

TRACE


Low voltage
Ceiling suspended


261 | 269 | 273


351




593 | 595



CHOOSE YOUR BASE

AL | Single base
ceiling base round | 350mA
phase-cut dim | incl. driver

	CODE
	914112W0
	914112L0
	914112M0
	914112B0

BL | Semi recessed single base

EL | Multi base linear
3 luminaires | 3x175mA | 525mm
phase-cut dim | incl. driver

	CODE
	914133W0
	914133B0

FL | Multi chandelier
GL | Track adapter
more infos on page 500

2.0

LED COB 6W | 350mA | 17V
aluminium
white fixtures – white cable
others – black cable

IP20 W-75° L80|50K

	CODE
	253471W_
	253471BL_
	253471BM_
	253471B_

LIGHT COLOUR	LUMEN|CRI	CODE
2700K	565|>90	3
3000K	590|>90	5

back





PRIVATE RESIDENCE | STUDIO FOOLEN THE NETHERLANDS

DESIGN AWARD 2024


reddot winner 2023




TRACE

Low voltage
Ceiling suspended







CHOOSE YOUR BASE

AL | Single base
ceiling base round | 350mA
phase-cut dim | incl. driver

	CODE
	914112W0
	914112L0
	914112M0
	914112B0

BL | Semi recessed single base
EL | Multi base linear
FL | Multi chandelier
GL | Track adapter
more infos on page 500

MORE VERSIONS + LOXONE ONLINE
weverducre.com/more-trace-suspended

3.0

LED COB 6W | 350mA | 18V
aluminium
white fixtures – white cable
others – black cable

IP20 W-54° L80|50K

	CODE
	253171W_
	253171BL_
	253171BM_
	253171B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	490	>90	3
3000K	520	>90	5

5.0

LED COB 6W | 350mA | 18V
aluminium
white fixtures – white cable
others – black cable

IP20 W-54° L80|50K

	CODE
	253271W_
	253271BL_
	253271BM_
	253271B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	450	>90	3
3000K	475	>90	5

back



ODREY

Low voltage
Ceiling suspended







353 | 379





599





CHOOSE YOUR BASE

AL | Single base
ceiling base round | 350mA
phase-cut dim | incl. driver

	CODE
	914112W0
	914112L0
	914112G0
	914112Q0
	914112B0

BL | Semi recessed single base
EL | Multi base linear
FL | Multi chandelier
GL | Track adapter
more infos on page 500

LOXONE VERSIONS ONLINE
weverducre.com/more-odrey-suspended

1.1

LED COB 7W | 350mA | 18V
aluminium
white fixtures – white cable
others – black cable

IP20 M-32° L70|55K

	CODE
	287161WW_
	287161QQ_
	287161BL_
	287161BG_
	287161BB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	400	>90	3
3000K	445	>90	5

1.2

LED COB 7W | 350mA | 18V
aluminium | shade matching
incl inner cover
white fixtures – white cable
others – black cable

IP20 M-32° L70|55K

	CODE
	287261WW_
	287261QQ_
	287261BL_
	287261BG_
	287261BB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	400	>90	3
3000K	445	>90	5

1.3

LED COB 7W | 350mA | 18V
aluminium
white fixtures – white cable
others – black cable

IP20 M-32° L70|55K

	CODE
	287361WW_
	287361QQ_
	287361BL_
	287361BG_
	287361BB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	450	>90	3
3000K	470	>90	5














RADIOLOGY AZ MONICA | EEF DEBEUF INTERIEURARCHITECT ANTWERP | BELGIUM

ODREY

Low voltage
Ceiling suspended








353 | 379




599

CHOOSE YOUR BASE

AL | Single base
ceiling base round | 350mA
phase-cut dim | incl. driver

	CODE
	914112W0
	914112L0
	914112G0
	914112Q0
	914112B0

BL | Semi recessed single base
EL | Multi base linear
FL | Multi chandelier
GL | Track adapter
more infos on page 500

LOXONE VERSIONS ONLINE
weverducre.com/more-odrey-suspended

1.4

LED COB 7W | 350mA | 18V
aluminium
white fixtures – white cable
others – black cable

IP20 M-32° L70|55K

	CODE
	287461WW_
	287461QQ_
	287461BL_
	287461BG_
	287461BB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	450	>90	3
3000K	470	>90	5

1.5

LED COB 7W | 350mA | 18V
aluminium
white fixtures – white cable
others – black cable

IP20 M-32° L70|55K

	CODE
	287561WW_
	287561QQ_
	287561BL_
	287561BG_
	287561BB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	450	>90	3
3000K	470	>90	5

1.6

LED COB 7W | 350mA | 18V
aluminium
white fixtures – white cable
others – black cable

IP20 M-32° L70|55K

	CODE
	287661WW_
	287661QQ_
	287661BL_
	287661BG_
	287661BB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	480	>90	3
3000K	505	>90	5

optional inner cover on page 910

back



OPLIA

Low voltage
Ceiling suspended







CHOOSE YOUR BASE

AL | Single base
ceiling base round | 250mA
phase-cut dim | incl. driver

CODE

914115W0
914115M0
914115B0

BL | Semi recessed single base
EL | Multi base linear

FL | Multi chandelier
6 luminaires | 6x175mA | 1020lm
phase-cut dim | incl. driver

CODE

914122WW0
914122BM0
914122BB0

GL | Track adapter
more infos on page 500

LOXONE VERSIONS ONLINE
weverducre.com/more-oplia

1.0

LED PCB 4W | 250mA | 12V
aluminium | glass
white fixtures – white cable
others – black cable

IP20 L80|100K

2700K | CRI >90 | 245lm

CODE

246181W3
246181M3
246181B3




SPICY LEMON | STAY STUDIO KORTRIJK | BELGIUM

SOLLI

Low voltage
Ceiling suspended





1.0

LED COB 7W | 350mA | 18V
aluminium
artisanal hand blown glass

IP20 L80|50K

	CODE
	238281FD_
	238281TD_
	238281WB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	360	>90	3
3000K	370	>90	5

CHOOSE YOUR BASE

AL | Single base
ceiling base round | 350mA
phase-cut dim | incl. driver

	CODE
	914112W0
	914112L0
	914112B0

BL | Semi recessed single base
EL | Multi base linear
FL | Multi chandelier
GL | Track adapter
more infos on page 500

LOXONE VERSIONS ONLINE
weverducre.com/more-solli

359

back





PRIVATE RESIDENCE | AGENCE BÉATRICE CASSAN FRANCE



SOLLI COCOON

Low voltage
Ceiling suspended





CHOOSE YOUR BASE

AL | Single base
ceiling base round | 350mA
phase-cut dim | incl. driver

	CODE
	914112W0
	914112L0
	914112B0

BL | Semi recessed single base
EL | Multi base linear
FL | Multi chandelier
GL | Track adapter
more infos on page 500

LOXONE VERSIONS ONLINE
weverducre.com/more-solli-cocoon

1.0

LED COB 7W | 350mA | 18V
aluminium | PET felt material
artisanal hand blown glass
noise absorbing material

IP20 L80|50K

	CODE
	238381MF_
	238381LF_
	238381OF_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	265	>90	3
3000K	275	>90	5

2.0

LED COB 7W | 350mA | 18V
aluminium | PET felt material
artisanal hand blown glass
noise absorbing material

IP20 L80|50K

	CODE
	238481MF_
	238481LF_
	238481OF_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	275	>90	3
3000K	285	>90	5

3.0

full acoustic element
aluminium | PET felt material
incl. black single base
noise absorbing material

	CODE
	238600MF0
	238600LF0
	238600OF0


back




CHOOSE YOUR BASE

high


AH BH CH DH EH FH IH

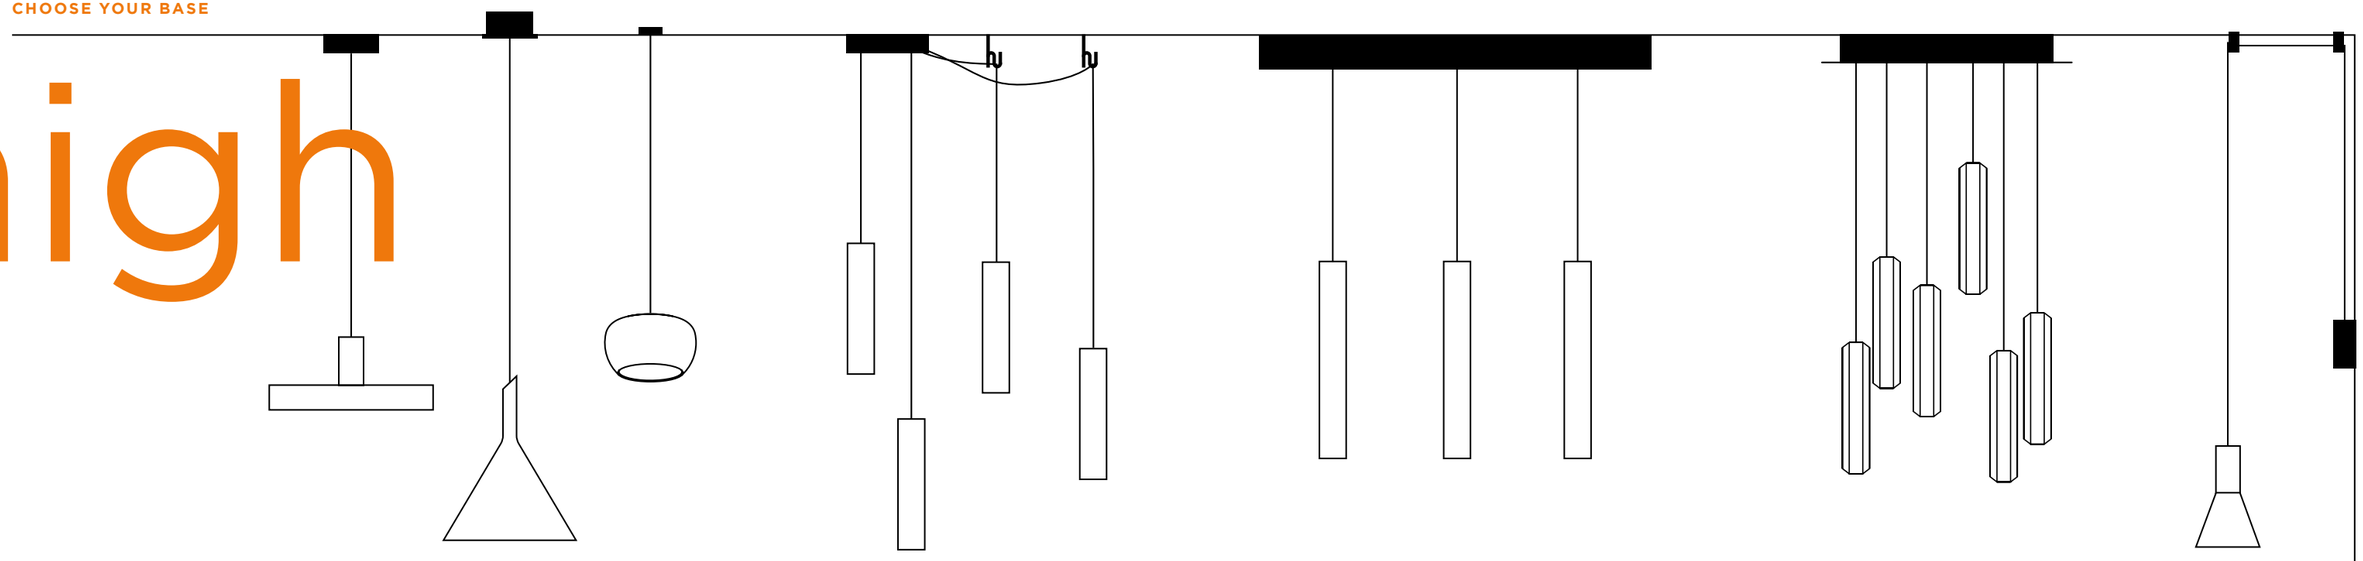





















AH | SINGLE BASE

ceiling base round

CODE	
914110W0	
914110L0	
914110G0	
914110M0	
914110Q0	
914110B0	

BH | SEMI RECESSED SINGLE BASE

Ø 73-76 | 70 | 10-35

CODE	
914150W0	
914150L0	
914150M0	
914150Q0	
914150B0	

CH | INVISIBLE SINGLE BASE

plasterkit | system - with fixation
max. 10kg

Ø 68 | 70 | 12.5-27.50

CODE	
90015196	
90015195	

DH | MULTI BASE ROUND

up to max. 4 | 8 luminaires

CODE	
max. 4	90052005
max. 4	90052006
max. 8	90052031
max. 8	90052032

EH | MULTI BASE LINEAR

1-9 luminaires
600mm | 900mm | 1800mm

CODE	
for 3	914130W0
for 3	914130B0
for 6	914131W0
for 6	914131B0
for 9	914132W0
for 9	914132B0

FH | MULTI CHANDELIER

1-9 luminaires

CODE	
914120WW0	
914120BL0	
914120BM0	
914120BQ0	
914120BB0	

optional hook

CODE	
90052083	
90052084	

GH | TRACK ADAPTER

for 1-phase tracks

CODE	
90014277	
90014278	



for 3-phase tracks

CODE	
90014279	
90014280	

IH | WALL BASE

for 1 luminaire | incl. 2 wall-ceiling brackets | for cable 4.25-5.5mm diameter | incl. switch on/off


CODE	
90019195	
90019196	

wall - ceiling bracket

CODE	
90019197	
90019198	

back




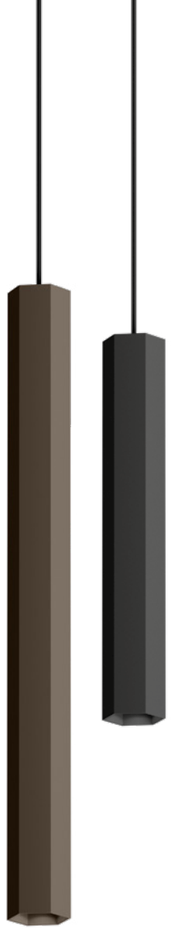


HEXO mini

High voltage
Ceiling suspended







CHOOSE YOUR BASE

AH | Single base
ceiling base round | ø83

	CODE
	914110M0
	914110Q0
	914110B0

BH | Semi recessed single base
CH | Invisible single base
DH | Multi base round
EH | Multi base linear
FH | Multi chandelier
GH | Track adapter
IH | Wall base
more infos on page 528

3.0

PAR11 max. 12W | GU10
220-240VAC | 50-60Hz
aluminium

IP20

	CODE
	259120M0
	259120Q0
	259120B0

OPTIONAL

PAR11 4.3W | GU10 | phase-cut dim

	CODE
2700K | 225lm	901128B3
3000K | 235lm	901128B5

5.0

PAR11 max. 12W | GU10
220-240VAC | 50-60Hz
aluminium

IP20

	CODE
	259220M0
	259220Q0
	259220B0

OPTIONAL

PAR11 4.3W | GU10 | phase-cut dim

	CODE
2700K | 225lm	901128B3
3000K | 235lm	901128B5

back



GREENHOUSE BXL | INTERVEST OFFICES & WAREHOUSES DIEGEM | BELGIUM

HEXO


High voltage
Ceiling suspended



245


377 | 393









3.0 LED

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-36° L80|55K

CODE

	226464G_
	226464Q_
	226464P_
	226464B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	405	>90	3
3000K	425	>90	5
2000-3000K	260	>90	9

LED module 20 years replaceability

3.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

CODE

	227420G0
	227420Q0
	227420P0
	227420B0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

CODE

2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905

CHOOSE YOUR BASE

AH | Single base
ceiling base round | ø83


CODE

	914110G0
	914110Q0
	914110B0

BH | Semi recessed single base
CH | Invisible single base
DH | Multi base round
EH | Multi base linear
FH | Multi chandelier
GH | Track adapter
IH | Wall base
more infos on page 528

LOXONE VERSIONS ONLINE
weverducre.com/more-hexo



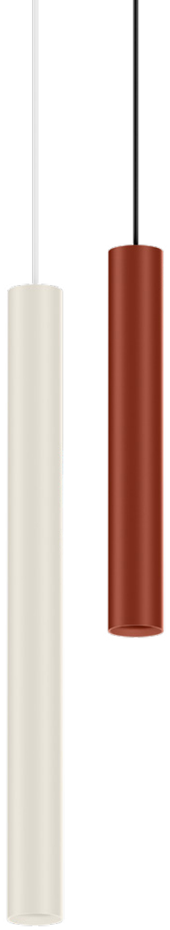


RAY mini


High voltage
Ceiling suspended

247

375 | 391

613





CHOOSE YOUR BASE

AH | Single base
ceiling base round | ø83

	CODE
	914110W0
	914110Q0
	914110B0

BH | Semi recessed single base
ceiling base round | ø84

	CODE
	914150W0
	914150Q0
	914150B0

CH | Invisible single base
DH | Multi base round
EH | Multi base linear
FH | Multi chandelier
GH | Track adapter
IH | Wall base
more infos on page 528

3.0

PAR11 max. 12W | GU10
220-240VAC | 50-60Hz
aluminium
white and LS fixtures – white cable
others – black cable

IP20

	CODE
	260120W0
	260120LS0
	260120ME0
	260120Q0
	260120B0

OPTIONAL

PAR11 4.3W | GU10 | phase-cut dim

	CODE
2700K | 240lm	901128W3
2700K | 225lm	901128B3
3000K | 255lm	901128W5
3000K | 235lm	901128B5

5.0

PAR11 max. 12W | GU10
220-240VAC | 50-60Hz
aluminium
white and LS fixtures – white cable
others – black cable

IP20

	CODE
	260220W0
	260220LS0
	260220Q0
	260220B0

OPTIONAL

PAR11 4.3W | GU10 | phase-cut dim

	CODE
2700K | 240lm	901128W3
2700K | 225lm	901128B3
3000K | 255lm	901128W5
3000K | 235lm	901128B5




ANDERSEN AARHUS | AK83 ARKITEKTER COPENHAGEN | DENMARK

RAY

High voltage
Ceiling suspended





2.0 | 3.0 LED

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white fixtures – white cable
others – black cable

IP20 M-36° L80|55K

2.0

200mm	CODE
	226764W_
	226764L_
	226764G_
	226764M_
	226764Q_
	226764P_
	226764B_


3.0

300mm	CODE
	226864W_
	226864L_
	226864G_
	226864M_
	226864Q_
	226864P_
	226864B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	405	>90	3
3000K	425	>90	5
2000-3000K	570	>90	9

LED module 20 years replaceability

2.0 | 3.0 PAR16



PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
white fixtures – white cable
others – black cable

IP20

2.0

200mm	CODE
	227720W0
	227720L0
	227720G0
	227720M0
	227720Q0
	227720P0
	227720B0

3.0

300mm	CODE
	227820W0
	227820L0
	227820G0
	227820M0
	227820Q0
	227820P0
	227820B0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905

CHOOSE YOUR BASE

AH | Single base
ceiling base round | ø83

	CODE
	914110W0
	914110L0
	914110G0
	914110M0
	914110Q0
	914110B0

BH | Semi recessed single base
CH | Invisible single base
DH | Multi base round
EH | Multi base linear
FH | Multi chandelier
GH | Track adapter
IH | Wall base
more infos on page 528

LOXONE VERSIONS ONLINE
weverducre.com/more-ray

back




RESTAURANT GOLDMARIE | LUKAS NOBILI MAINZ GERMANY


ODREY

High voltage
Ceiling suspended









1.1

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
white fixtures – white cable
others – black cable

IP20

1.3


PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
white fixtures – white cable
others – black cable

IP20













CHOOSE YOUR BASE

AH | Single base
ceiling base round | ø83

	CODE
	914110W0
	914110L0
	914110G0
	914110Q0
	914110B0

BH | Semi recessed single base
CH | Invisible single base
DH | Multi base round
EH | Multi base linear
FH | Multi chandelier
GH | Track adapter
IH | Wall base
more infos on page 528

	CODE
	287120WW0
	287120GG0
	287120QQ0
	287120BL0
	287120BG0
	287120BB0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905

	CODE
	287320WW0
	287320GG0
	287320QQ0
	287320BL0
	287320BG0
	287320BB0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905

back




HOTEL MEERBERG PERTISAU | AUSTRIA



ODREY

High voltage
Ceiling suspended





1.2

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
white fixtures – white cable
others – black cable

IP20



CHOOSE YOUR BASE

AH | Single base
ceiling base round | ø83

	CODE
	914110W0
	914110L0
	914110G0
	914110Q0
	914110B0

BH | Semi recessed single base
CH | Invisible single base
DH | Multi base round
EH | Multi base linear
FH | Multi chandelier
GH | Track adapter
IH | Wall base
more infos on page 528

	CODE
	287220WW0
	287220GG0
	287220QQ0
	287220BL0
	287220BG0
	287220BB0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905

back





CAFÉ APOTHEKA | KIDS STUDIOS TÜBINGEN | GERMANY

back



CECI PICCOLA CUCINA | STUDIOZERO85 PESCARA | ITALY


WW


GG


QQ


BL


BG



BB


ODREY


High voltage
Ceiling suspended











353 | 379

599

1.4

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
white fixtures – white cable
others – black cable

IP20

1.5

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
white fixtures – white cable
others – black cable

IP20

1.6

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
white fixtures – white cable
others – black cable

IP20

CHOOSE YOUR BASE

AH | Single base
ceiling base round | ø83

	CODE
	914110W0
	914110L0
	914110G0
	914110Q0
	914110B0

BH | Semi recessed single base
CH | Invisible single base
DH | Multi base round
EH | Multi base linear
FH | Multi chandelier
GH | Track adapter
IH | Wall base
more infos on page 528

	CODE
	287420WW0
	287420GG0
	287420QQ0
	287420BL0
	287420BG0
	287420BB0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905

	CODE
	287520WW0
	287520GG0
	287520QQ0
	287520BL0
	287520BG0
	287520BB0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905

	CODE
	287620WW0
	287620GG0
	287620QQ0
	287620BL0
	287620BG0
	287620BB0

optional inner cover on page 910

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5


more lamps and info on page 905



RESTAURANT WEINTRÄNE | MICHAEL FALTENBACHER CREATION & CONCEPT MUNICH | GERMANY

DESIGN AWARD 2024


reddot winner 2023

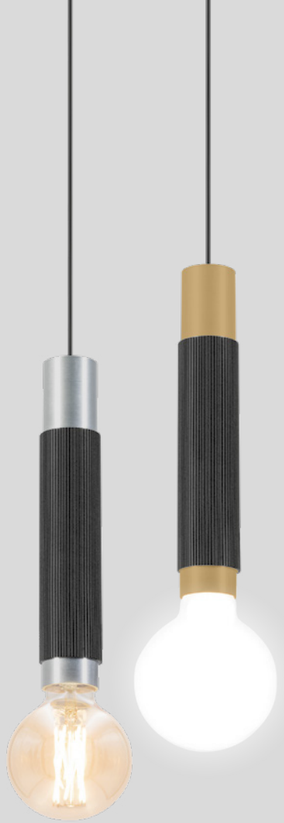

TRACE

High voltage
Ceiling suspended





1.0

G95 max. 12W | E27
220-240VAC | 50-60Hz
aluminium
white fixtures – white cable
others – black cable

IP20

	CODE
	2538E0W0
	2538E0BL0
	2538E0BM0
	2538E0B0

CHOOSE YOUR BASE

AH | Single base
ceiling base round | ø83

	CODE
	914110W0
	914110L0
	914110M0
	914110B0

BH | Semi recessed single base
CH | Invisible single base
DH | Multi base round
EH | Multi base linear
FH | Multi chandelier
GH | Track adapter
IH | Wall base
more infos on page 528

OPTIONAL

G95 4.5W | E27 | phase-cut dim | clear

	CODE
2700K | 375lm	9003E160

G95 10W | E27 | phase-cut dim | opal

	CODE
2700K | 1060lm	9003E163

G95 5.4W | E27 | phase-cut dim
filament | gold tinted

	CODE
2200K | 380lm	9003E111

back



PRIVATE RESIDENCE | STUDIO BENOIT BELGIUM

WETRO

High voltage
Ceiling suspended




CHOOSE YOUR BASE

AH | Single base
ceiling base round | ø83

	CODE
	914110W0
	914110L0
	914110B0

BH | Semi recessed single base
CH | Invisible single base
DH | Multi base round
EH | Multi base linear
FH | Multi chandelier
GH | Track adapter
IH | Wall base
more infos on page 528

LOXONE VERSIONS ONLINE
weverducre.com/wetro



1.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal hand blown glass
white cable on request


IP20 L80|50K

1800-2850K | CRI >90 | 375lm

	CODE
	236188P9

1800-2850K | >90 CRI | 525lm

	CODE
	236188B9



2.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal hand blown glass
white cable on request


IP20 L80|50K

1800-2850K | CRI >90 | 385lm

	CODE
	236288P9

1800-2850K | >90 CRI | 510lm

	CODE
	236288B9



3.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal hand blown glass
white cable on request

IP20 L80|50K

1800-2850K | CRI >90 | 445lm

	CODE
	236388P9

1800-2850K | >90 CRI | 530lm

	CODE
	236388B9

back



PRIVATE RESIDENCE BELGIUM

WETRO


High voltage
Ceiling suspended



CHOOSE YOUR BASE

AH | Single base
ceiling base round | ø83

	CODE
	914110W0
	914110L0
	914110B0



BH | Semi recessed single base
CH | Invisible single base
DH | Multi base round
EH | Multi base linear
FH | Multi chandelier
GH | Track adapter
IH | Wall base
more infos on page 528

LOXONE VERSIONS ONLINE
weverducre.com/wetro


1.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal Italian hand blown glass
white cable on request

IP20 L80|50K

1800-2850K | CRI >90 | 615lm

	CODE
	236188TS9




2.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal Italian hand blown glass
white cable on request

IP20 L80|50K

1800-2850K | CRI >90 | 510lm

	CODE
	236288TS9



3.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal Italian hand blown glass
white cable on request

IP20 L80|50K

1800-2850K | CRI >90 | 530lm


	CODE
	236388TS9

back



WETRO

High voltage
Ceiling suspended

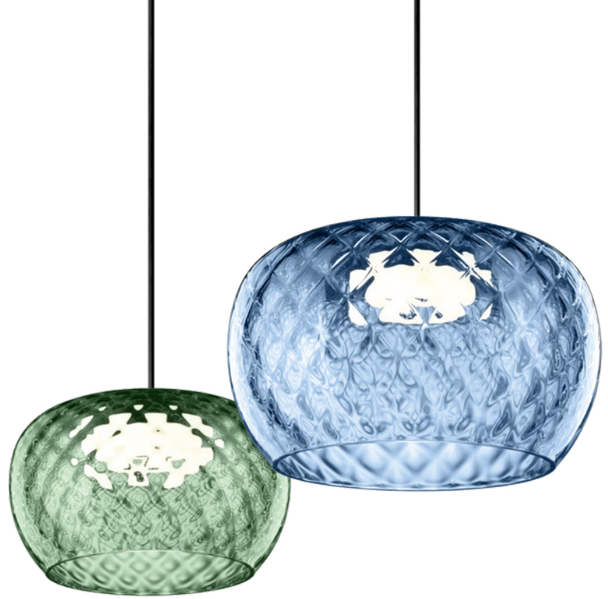


CHOOSE YOUR BASE

AH | Single base
ceiling base round | ø83

	CODE
	914110W0
	914110L0
	914110B0

BH | Semi recessed single base
CH | Invisible single base
DH | Multi base round
EH | Multi base linear
FH | Multi chandelier
GH | Track adapter
IH | Wall base
more infos on page 528

LOXONE VERSIONS ONLINE
weverducre.com/wetro




1.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal Italian hand blown glass
white cable on request

IP20 L80|50K

1800-2850K | CRI >90 | 520lm

	CODE
	236188TD9
	236188YD9
	236188GD9
	236188BD9




2.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal Italian hand blown glass
white cable on request

IP20 L80|50K

1800-2850K | CRI >90 | 480lm

	CODE
	236288TD9
	236288YD9
	236288GD9
	236288BD9



3.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal Italian hand blown glass
white cable on request

IP20 L80|50K

1800-2850K | CRI >90 | 495lm

	CODE
	236388TD9
	236388YD9
	236388GD9
	236388BD9

back




PRIVATE RESIDENCE | ANA TERRA ITALY

WETRO

High voltage
Ceiling suspended





CHOOSE YOUR BASE

AH | Single base
ceiling base round | ø83

	CODE
	914110W0
	914110L0
	914110Q0
	914110B0

BH | Semi recessed single base
CH | Invisible single base
DH | Multi base round
EH | Multi base linear
FH | Multi chandelier
GH | Track adapter
IH | Wall base
more infos on page 528

LOXONE VERSIONS ONLINE
weverducre.com/wetro



1.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal Italian hand blown glass
white cable on request


IP20 L80|50K

1800-2850K | CRI >90 | 495lm

	CODE
	236188TW9

1800-2850K | CRI >90 | 455lm

	CODE
	236188DW9



2.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal Italian hand blown glass
white cable on request


IP20 L80|50K

1800-2850K | CRI >90 | 435lm

	CODE
	236288TW9

1800-2850K | CRI >90 | 420lm

	CODE
	236288DW9



3.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal Italian hand blown glass
white cable on request

IP20 L80|50K

1800-2850K | CRI >90 | 455lm

	CODE
	236388TW9

1800-2850K | CRI >90 | 440lm

	CODE
	236388DW9

back




PRIVATE RESIDENCE | MD STUDIO MARIA DECU ROMANIA

CLEA

High voltage
Ceiling suspended



287
631




1.0

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white opal glass hand blown
black cable on request

IP20 L80|50K

	CODE
	281784W_
	281784SG_
	281784FJ_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	780	>90	3
3000K	825	>90	5




2.0

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white opal glass hand blown
black cable on request

IP20 L80|50K

	CODE
	281884W_
	281884SG_
	281884FJ_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	780	>90	3
3000K	825	>90	5



3.0

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white opal glass hand blown
black cable on request

IP20 L80|50K

	CODE
	281984W_
	281984SG_
	281984FJ_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	770	>90	3
3000K	815	>90	5

CHOOSE YOUR BASE

AH | Single base
ceiling base round | ø83


	CODE
	914110W0
	914110L0

BH | Semi recessed single base
CH | Invisible single base
DH | Multi base round
EH | Multi base linear
FH | Multi chandelier
GH | Track adapter
IH | Wall base
more infos on page 528

back



PRIVATE RESIDENCE GREECE

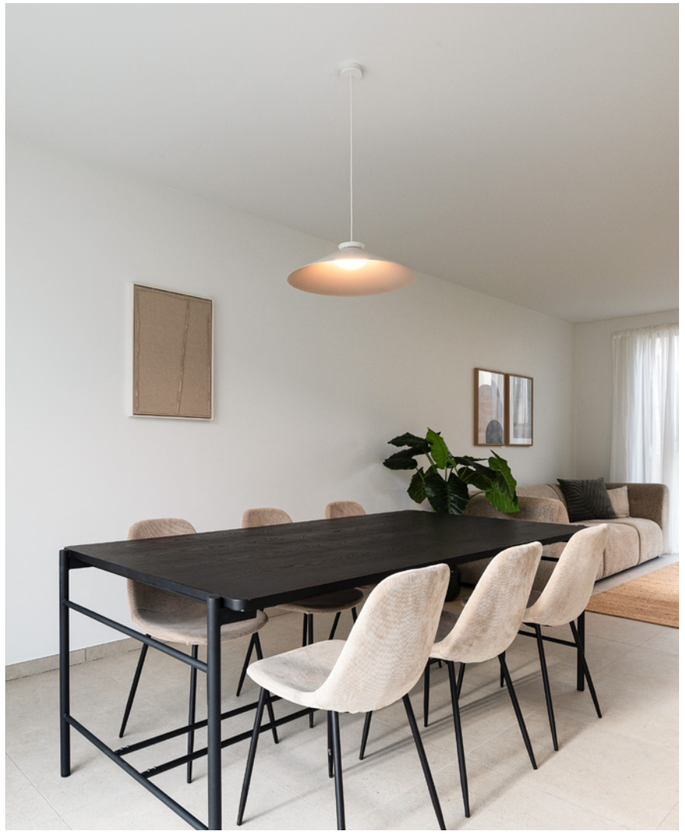

PRIVATE RESIDENCE | ERIBO STIJLBOUWERS BELGIUM





PRIVATE RESIDENCE | ARCHITEKTI MIKULAJ & MIKULAJOVA SLOVAKIA

SHIEK

High voltage
Ceiling suspended







3.0 LED

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium
white cable on request

IP20 L80|50K

1800-2850K | CRI >90 | 710lm

	CODE
	237388W9
	237388J9
	237388SG9
	237388ME9
	237388P9
	237388K9
	237388Z9

3.0 E27

A60 max. 20W | E27
100-240VAC | 50-60Hz
aluminium
white cable on request

IP20

	CODE
	2343E0W0
	2343E0J0
	2343E0SG0
	2343E0ME0
	2343E0P0
	2343E0K0
	2343E0Z0

CHOOSE YOUR BASE

AH | Single base
ceiling base round | ø83

	CODE
	914110W0
	914110L0
	914110B0

BH | Semi recessed single base
CH | Invisible single base
DH | Multi base round
EH | Multi base linear
FH | Multi chandelier
GH | Track adapter
IH | Wall base
more infos on page 528

OPTIONAL

A60 9W opal | E27 | phase-cut dim

	CODE
2700K | 800lm	9003E152

LOXONE VERSIONS ONLINE
weverducre.com/more-shiek

back





PRIVATE RESIDENCE | ZEIT ARCHITECTS SLOVAKIA


DINOR

High voltage
Ceiling suspended









CHOOSE YOUR BASE

AH | Single base
ceiling base round | ø83

CODE

	914110W0
	914110L0
	914110B0

BH | Semi recessed single base
CH | Invisible single base
more infos on page 528

LOXONE VERSIONS ONLINE
weverducre.com/more-dinor

1.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium
white cable on request

IP20 L80|60K

1800-2850K | CRI >90 | 570lm

CODE

	255188GW9
	255188BG9
	255188BB9

2.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium
white cable on request

IP20 L80|60K

1800-2850K | CRI >90 | 750lm

CODE

	255288GW9
	255288BG9
	255288BB9

3.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium
white cable on request

IP20 L80|60K

1800-2850K | CRI >90 | 830lm

CODE

	255388GW9
	255388BG9
	255388BB9

back





Wall recessed

566 – 581

SPOT LIGHTS



LECA SNOOZE
569



MATCH SNOOZE
571

GUIDE LIGHTS



RETO 0.8
573



RETO 2.0
573



LITO 1.0
575



LITO 2.0
575

STRIPE SLIM
577

STRIPE
579



ORIS 0.7
581




ORIS 0.8
581



ORIS 1.3
581

back

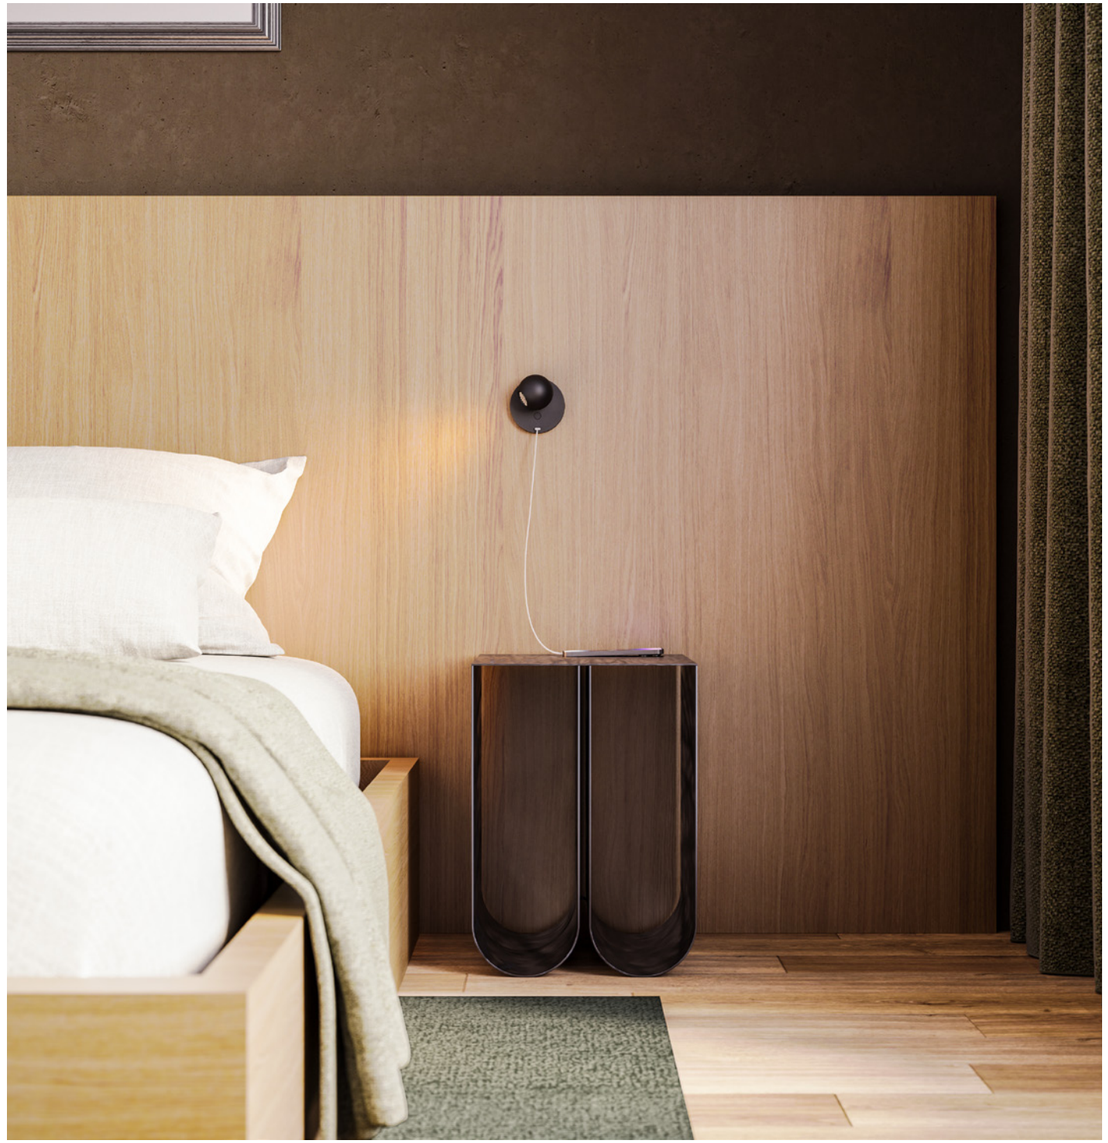

LECA snooze

Wall recessed

135
189
325







1.0 SEMI RECESSED

LED COB 5W | phase cut-dim
220-240VAC | 50-60Hz | incl. driver
aluminium
incl. switch on / off | push dim
USB-C port | incl. honeycomb
fits standard installation box ø 68

IP20 0°-90°|350° N-17° L80|50K

68-71 36 5-40

2700K | CRI >90 | 240lm



	CODE
	188544W3
	188544Q3
	188544B3

back



PRIVATE RESIDENCE | STUDIO BINNEN NETHERLANDS

MATCH snooze

Wall recessed 61 | 137 | 153

193


329 | 347


415 | 509

589 | 685

723 | 729








1.0 SEMI RECESSED

LED COB 4W | phase cut-dim
220-240VAC | 50-60Hz | incl. driver
aluminium
incl. switch on / off | push dim
USB-C port | installation box

IP20 0°-90°|350° M-23° L80|50K

41x190 55 12.5-32.5

2700K | CRI >90 | 240lm



CODE	
	177554W3
	177554L3
	177554M3
	177554Q3
	177554B3

1.1 SEMI RECESSED

LED COB 4W | phase cut-dim
220-240VAC | 50-60Hz | incl. driver
aluminium
incl. switch on / off | push dim
installation box

IP20 0°-90°|350° M-23° L80|50K

41x190 55 12.5-32.5

2700K | CRI >90 | 240lm

CODE	
	177654W3
	177654B3


back




PRIVATE RESIDENCE | STUDIO PALINPERÄ FINLAND

RETO

Wall recessed





0.8

LED PCB 4W | 350mA | 9V
aluminium

IP20 L80|50K

66x66 L40 min. 12

3000K | CRI >90 | 145lm

	CODE
	3451A1W5
	3451A1L5
	3451A1M5
	3451A1Q5
	3451A1B5

2.0

LED PCB 6W | 350mA | 17V
aluminium

IP20 L80|50K

47x182 L40 min. 12

3000K | CRI >90 | 455lm

	CODE
	3452A1W5
	3452A1B5

ALWAYS USE

driver | 350mA

	CODE
6W	90213202

more options and specs on page 896

ALWAYS USE

driver | 350mA

	CODE
6W	90213202

more options and specs on page 896

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012047

concrete housing

	CODE
	90012046

specs on page 914

OPTIONAL

recessed housing incl. plasterkit


	CODE
	90012039

concrete housing

	CODE
	90012044

specs on page 914





LOXONE VERSION ONLINE
weverducre.com/more-reto


781

835

back




PRIVATE RESIDENCE | BAUBUREAU OG 27 AG | LINEAR 54 SWITZERLAND




LOXONE VERSION ONLINE
weverducre.com/more-lito

LITO

Wall recessed





1.0

LED PCB 2/3W | 350/500mA | 6V
aluminium | anod.

IP20 L80|60K

70x70 35 min. 12

3000K | CRI >90 | 170/235lm

	CODE
	145381W5
	145381A5
	145381B5

ALWAYS USE

driver

	CODE
6W | 350mA	90213202
6W | 500mA	90214201

more options and specs on page 896

OPTIONAL

	CODE
recessed housing	90012027
plasterkit	90017119

recessed housing | always use in combination with plasterkit

2.0

LED PCB 2/3W | 350/500mA | 6V
aluminium | anod.

IP20 L80|60K

70x70 35 min. 12

3000K | CRI >90 | 85/115lm

	CODE
	1454A1W5
	1454A1A5
	1454A1B5

ALWAYS USE

driver

	CODE
6W | 350mA	90213202
6W | 500mA	90214201


more options and specs on page 896

OPTIONAL

	CODE
recessed housing	90012027
plasterkit	90017119

recessed housing | always use in combination with plasterkit


back

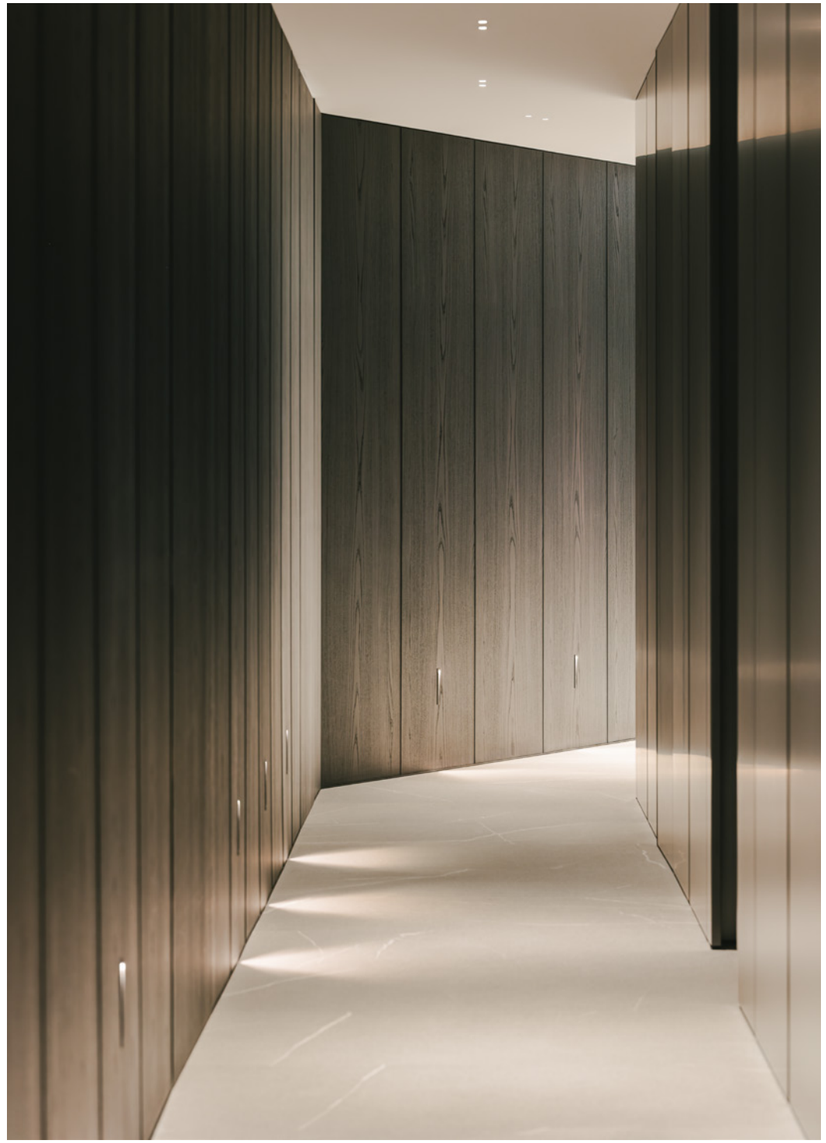

PRIVATE RESIDENCE SPAIN

STRIPE SLIM

Wall recessed



1.4

LED PCB 2W | const. volt. | 24V
aluminium

IP20 L70|60K

135x9 18 8-18

3000K | CRI >80 | 15lm

	CODE
	3058A1W5
	3058A1B5



ALWAYS USE

driver | phase-cut dim
min. 2 luminaires per driver

	CODE
25W	90222701

revision opening required

more options and specs on page 901


back




PRIVATE RESIDENCE | KILLIAN GARTNER - ROOMS ATELIER AUSTRIA

STRIPE

Wall recessed



LOXONE VERSION ONLINE
weverducre.com/more-stripe



0.4

LED PCB 1/2W | 350/700mA | 3V
aluminium

IP20 L70|60K

25x56 40 8-18

3000K | CRI >80 | 15/28lm

	CODE
	3054A1WA4
	3054A1LA4
	3054A1GA4
	3054A1BA4

ALWAYS USE

driver

	CODE
6W | 350mA	90213202
6W | 700mA	90215203


more options and specs on page 896

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012037

driver to be placed externally
specs on page 914



0.7

LED PCB 1/2W | 350/700mA | 3V
aluminium

IP20 L70|60K

25x56 40 8-18

3000K | CRI >80 | 15/28lm

	CODE
	3055A1WA4
	3055A1LA4
	3055A1GA4
	3055A1BA4

ALWAYS USE

driver

	CODE
6W | 350mA	90213202
6W | 700mA	90215203


more options and specs on page 896

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012037

driver to be placed externally
specs on page 914



2.2

LED PCB 1/2W | 350/700mA | 3V
aluminium

IP20 L70|60K

25x170 40 8-18

3000K | CRI >80 | 20/36lm

	CODE
	3056A1WA4
	3056A1LA4
	3056A1GA4
	3056A1BA4

ALWAYS USE

driver

	CODE
6W | 350mA	90213202
6W | 700mA	90215203

more options and specs on page 896

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012038

specs on page 914




MAISON BUDISM COUTURE | PEERUTIN KAROL ARCHITECTS CAPETOWN | SOUTH AFRICA


ORIS


Wall recessed











0.7

LED PCB 2/5W | 350/700mA | 6V aluminium

IP20 L70|60K

47x182 40 min. 12

3000K | CRI >90 | 70/120lm

	CODE
	3271A1W5
	3271A1B5

ALWAYS USE

driver

	CODE
6W | 350mA	90213202
6W | 700mA	90215203

more options and specs on page 896

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012039

concrete housing

	CODE
	90012044

specs on page 914

0.8

LED PCB 2/5W | 350/700mA | 6V aluminium

IP20 L70|60K

66x66 40 min. 12

3000K | CRI >90 | 90/150lm

	CODE
	3274A1W5
	3274A1B5

ALWAYS USE

driver

	CODE
6W | 350mA	90213202
6W | 700mA	90215203

more options and specs on page 896

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012047

concrete housing

	CODE
	90012046

specs on page 914

1.3

LED PCB 4/7W | 350/700mA | 9V aluminium

IP20 L70|60K

115x117 40 min. 12

3000K | CRI >90 | 145/220lm

	CODE
	3276A1W5
	3276A1B5

ALWAYS USE

driver

	CODE
6W | 350mA	90213202
7W | 700mA	90215301

more options and specs on page 896

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012041

concrete housing

	CODE
	90012040

specs on page 914

LOXONE VERSION ONLINE
weverducre.com/more-oris

785

back

Wall surface

582 — 711

LUMINAIRES



CENO
585

MATCH
589



TRACE MINI
591



TRACE
593

TRACE SLIM
595



ODREY
599



BOX MINI
605



BOX
607



DOCUS MINI
609



HEXO MINI
611



RAY MINI
613



RAY
615



CENTRAL
617



LEENS
619




BENTO
621



DRO
623



MIRRO
625



MIRRO SOFT
629



CLEA
631



J.J.W.
633



ROOMOR
639



DARF
643




CG SQUARE
647



DOT
649



TAPIS
651




TAPIS SOFT
657



MILES ROUND
663



MILES CARRÉ
667



MILES
669




LARRA
671

FINLIN
673



FINLIN ROUND
679



FIL SPIN
681



VENN
683

SPOT LIGHTS



MATCH SNOOZE
685



MICK SNOOZE
687



SARA SNOOZE
689



MICK WALL 1.0
691

UPLIGHTS



DOMINO
693



SCAVA
695

IP-RATED

HAJO IP44
697

PERLEZ IP44
701

PERLEZ CLIP IP44
703

MIRBA IP44
705

MIRBI LONG IP44
707

RIBELLE IP65
709

PAVIO IP65
711

back




FRENCH VILLAGE CAFÉ & BISTRO | LARA WOODS WOZNICA BELFAST | UNITED KINGDOM

CENO

Wall surface





2.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-31° L70|55K

	CODE
	376264W_
	376264Q_
	376264CH_
	376264B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x260	>90	3
3000K	2x270	>90	5



OPTIONAL

honeycomb louver

	CODE
	915230B0

LOXONE VERSIONS ONLINE
weverducre.com/more-ceno-wall

back





OFFICE REAZN | STUDIO BENOIT KRUISEM | BELGIUM

reddot winner 2023

MATCH

Wall surface 61 | 137 | 153


193


329 | 347


415 | 509

571

723 | 729

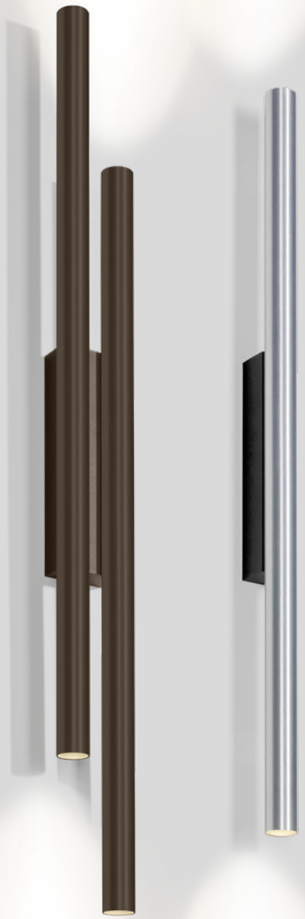





2.0

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-Z5° L80|50K

	CODE
	377264W_
	377264BL_
	377264Q_
	377264B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x415	>90	3
3000K	2x440	>90	5

4.0

LED COB 23W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-Z5° L80|50K

	CODE
	377464W_
	377464Q_
	377464B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	4x415	>90	3
3000K	4x440	>90	5


back





TRACE mini


Wall surface

331

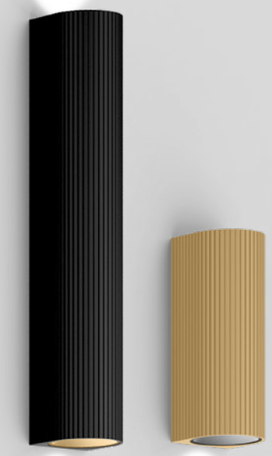







1.0

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-30° L80|50K

	CODE
	333654W_
	333654MB_
	333654BM_
	333654B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	420	>90	3
3000K	420	>90	5

2.0

LED COB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-30° L80|50K

	CODE
	333754W_
	333754MB_
	333754BM_
	333754B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	840	>90	3
3000K	840	>90	5

back





DESIGN AWARD 2024


reddot winner 2023

TRACE

Wall surface

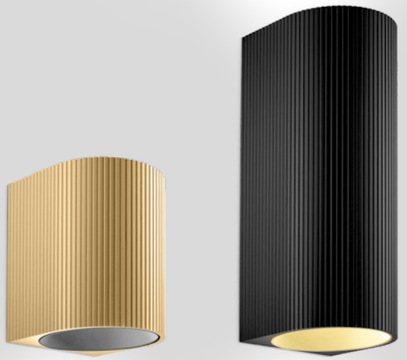






W


H


CH


B

1.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-22° L80|50K

	CODE
	333164W_
	333164H_
	333164CH_
	333164B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	575	>90	3
3000K	645	>90	5

2.0

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-22° L80|50K

	CODE
	333264W_
	333264H_
	333264CH_
	333264B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x560	>90	3
3000K	2x615	>90	5

back

261 | 269 | 273

351

511 | 547




OFFICE | ALFA ARCHITECTES LYON | FRANCE

reddot winner 2023

TRACE SLIM

Wall surface

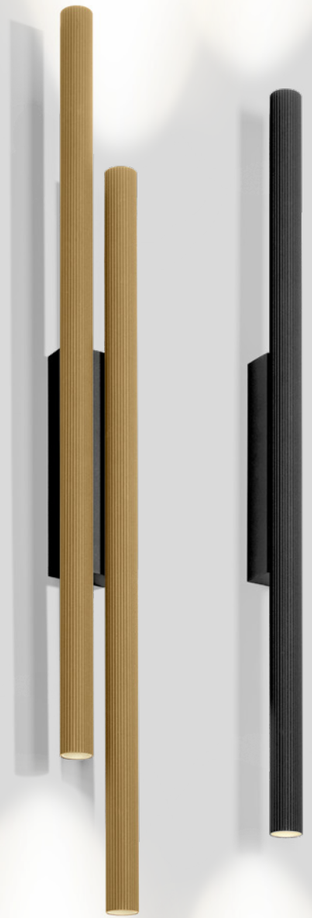




261 | 269 | 273




351



511 | 547





1.0

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-23° L80|50K

	CODE
	333364CH_
	333364B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x395	>90	3
3000K	2x420	>90	5

2.0

LED COB 23W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-23° L80|50K

	CODE
	333464CH_
	333464B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	4x395	>90	3
3000K	4x420	>90	5

back







PRIVATE RESIDENCE | TIPHAINE MODIN FRANCE


ODREY

Wall surface



353 | 379

517 | 539



1.3

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium | steel

IP20


	CODE
	387120WW0
	387120QQ0
	387120GB0
	387120BL0
	387120BG0
	387120BB0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905



1.4

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium | steel

IP20


	CODE
	387220WW0
	387220QQ0
	387220GB0
	387220BL0
	387220BG0
	387220BB0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905



1.5

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium | steel

IP20

	CODE
	387320WW0
	387320QQ0
	387320GB0
	387320BL0
	387320BG0
	387320BB0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905



MORE VERSIONS ONLINE
weverducre.com/more-odrey-wall



CABINET DENTAIRE VAUBAN | DAHDAH STUDIO VAUBAN | FRANCE

ODREY

Wall surface



WW

GB


BG

QQ

BL

BB

MORE VERSIONS ONLINE
weverducre.com/more-odrey-wall



2.3

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium | steel

IP20


	CODE
	387420WW0
	387420QQ0
	387420GB0
	387420BL0
	387420BG0
	387420BB0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905



2.4

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium | steel

IP20


	CODE
	387520WW0
	387520QQ0
	387520GB0
	387520BL0
	387520BG0
	387520BB0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905



2.5

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium | steel

IP20

	CODE
	387620WW0
	387620QQ0
	387620GB0
	387620BL0
	387620BG0
	387620BB0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905

353 | 379

517 | 539

3D

back


stars

weverducre.com/universalstars

SIMPLE FORMALITY

Even if maths wasn't your favourite subject, BOX, DOCUS, HEXO, and RAY will impress you. These elegant, slim luminaires fit almost any room situation – on the ceiling or wall, indoors or outdoors. Available in many colours and versions, they create a true wow effect everywhere.

Auch wenn Mathematik nicht Ihr Lieblingsfach war: BOX, DOCUS, HEXO und RAY werden Sie begeistern. Die eleganten, schlanken Leuchten passen in fast jede Raumsituation – ob an Decke oder Wand, innen oder außen. In vielen Farben und Varianten erhältlich, sorgen sie überall für einen echten Wow-Effekt.



BOX



DOCUS



HEXO



RAY








PRIVATE RESIDENCE BELGIUM

BOX mini

Wall surface

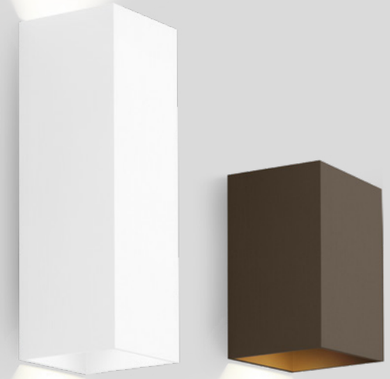





1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

	CODE
	300120W0
	300120L0
	300120G0
	300120M0
	300120Q0
	300120B0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905

2.0

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

	CODE
	301120W0
	301120L0
	301120G0
	301120M0
	301120Q0
	301120B0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905

back




PRIVATE RESIDENCE | THE ART OF LIVING MAGAZINE THE NETHERLANDS


BOX


Wall surface











1.0 LED

LED PCB 6W | phase-cut dim 220-240VAC | 50-60Hz
aluminium

IP20 L80|55K

	CODE
	341168W_
	341168L_
	341168G_
	341168M_
	341168Q_
	341168B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	350	>90	3
3000K	370	>90	5
1800-2850K	330	>90	9

2.0 LED

LED PCB 11W | phase-cut dim 220-240VAC | 50-60Hz
aluminium

IP20 L80|55K

	CODE
	341148W_
	341148L_
	341148G_
	341148M_
	341148Q_
	341148B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x440	>90	3
3000K	2x460	>90	5
1800-2850K	2x410	>90	9

1.0 QT14

QT14 max. 75W | G9
220-240VAC | 50-60Hz
aluminium

IP20

	CODE
	3211G0W0
	3211G0L0
	3211G0G0
	3211G0M0
	3211G0Q0
	3211G0B0

OPTIONAL

flaps for adjustable beam angle

	CODE
	900401W0

QT14 3.5W | G9 | phase-cut dim clear

	CODE
2700K | 340lm	9010G803
3000K | 350lm	9010G805

LOXONE VERSIONS ONLINE
weverducre.com/more-box-wall

235
335
765
815
back





PRIVATE RESIDENCE | PROVENZANO ARCHITETTI ASSOCIATI GUILA LUPO ITALY

DOCUS mini

Wall surface







1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

	CODE
	300320W0
	300320G0
	300320B0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905

2.0

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

	CODE
	301320W0
	301320G0
	301320B0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5


more lamps and info on page 905




PRIVATE RESIDENCE | MOOSEBERRY DESIGN GROUP UKRAINE

HEXO mini

Wall surface

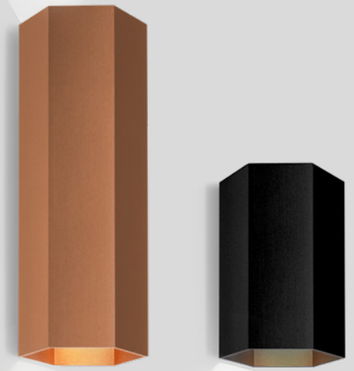





1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

	CODE
	300420G0
	300420Q0
	300420P0
	300420B0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905

2.0

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

	CODE
	301420G0
	301420Q0
	301420P0
	301420B0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905


back



PRIVATE RESIDENCE | DÉVÉ CREATIONS THE NETHERLANDS

RAY mini

Wall surface

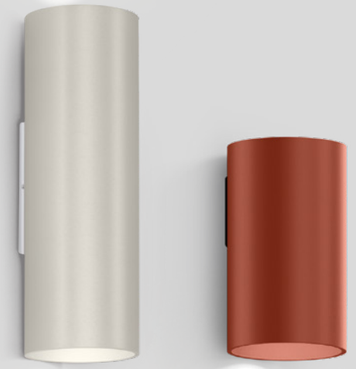











1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

	CODE
	300220W0
	300220L0
	300220G0
	300220M0
	300220SG0
	300220ME0
	300220Q0
	300220P0
	300220B0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905

2.0

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

	CODE
	301220W0
	301220L0
	301220G0
	301220M0
	301220SG0
	301220ME0
	301220Q0
	301220P0
	301220B0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905

back




DE BRINK VAN PARK BOSWIJK | STUDIO ID+ DOORN | THE NETHERLANDS

RAY

Wall surface











1.0 LED

LED PCB 6W | phase-cut dim 220-240VAC | 50-60Hz
aluminium

IP20 L80|55K

	CODE
	342168W_
	342168G_
	342168M_
	342168Q_
	342168B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	350	>90	3
3000K	370	>90	5
1800-2850K	330	>90	9

2.0 LED

LED PCB 11W | phase-cut dim 220-240VAC | 50-60Hz
aluminium

IP20 L80|55K

	CODE
	342148W_
	342148G_
	342148M_
	342148Q_
	342148B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x440	>90	3
3000K	2x460	>90	5
1800-2850K	2x410	>90	9

1.0 QT14

QT14 max. 75W | G9
220-240VAC | 50-60Hz
aluminium

IP20

	CODE
	3221G0W0
	3221G0G0
	3221G0M0
	3221G0Q0
	3221G0B0

OPTIONAL

flaps for adjustable beam angle

	CODE
	900401W0

QT14 3.5W | G9 | phase-cut dim clear

	CODE
2700K | 340lm	9010G803
3000K | 350lm	9010G805


LOXONE VERSIONS ONLINE
weverducre.com/more-ray-wall

251
341 | 377 | 393
537
759
805
back

CENTRAL

Wall surface







1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 L80|60K

	CODE
	313574W_
	313574L_
	313574G_
	313574B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	580	>90	3
3000K	620	>90	5

2.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 L80|60K

	CODE
	313674W_
	313674L_
	313674G_
	313674B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x310	>90	3
3000K	2x330	>90	5

809

back





OFFICE CEEBE | WEYGERS HASSELT | BELGIUM

LEENS

Wall surface







1.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 L80|60K

3000K | CRI >90 | 525lm

	CODE
	311174W5
	311174L5
	311174B5

2.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 L80|60K

3000K | CRI >90 | 2x320lm


	CODE
	311274W5
	311274L5
	311274B5

back

BENTO

Wall surface






1.3

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 L80|60K

3000K | CRI >90 | 285lm

	CODE
	309274W5
	309274B5



3.6

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 L80|60K

3000K | CRI >90 | 285lm


	CODE
	309374W5
	309374B5


back


DRO

Wall surface









279
373
465
715 | 731

1.0

QT14 max. 5W | G9
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass
mirror thickness 3-6mm

IP44

69-71

	CODE
	3431G0W0

OPTIONAL

QT14 3.5W | G9 | phase-cut dim clear

	CODE
2700K | 340lm	9010G803
3000K | 350lm	9010G805

2.0

C35 max. 6W | E14
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass
mirror thickness 3-6mm

IP44

105-107

	CODE
	3432C0W0

OPTIONAL

C35 5.5W | E14 | phase-cut dim
opal

	CODE
2700K | 450lm	9003C103

13&9 DESIGN


back





RESTAURANT TRIANGOLO | CONIX COOL INTERIOR EDEGEM | BELGIUM


MIRRO

Wall surface

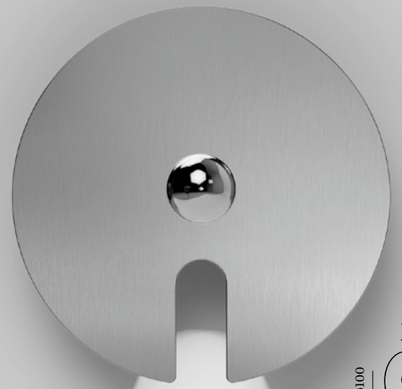







1.0

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | one side reflective composite panel

IP20

	CODE
	6321E0GB0
	6321E0NB0
	6321E0LB0
	6321E0BL0

OPTIONAL

A60 5.5W | E27 | phase-cut dim
gold mirror

	CODE
2700K | 405lm	9003E139

A60 5.5W | E27 | phase-cut dim
silver mirror

	CODE
2700K | 405lm	9003E140

2.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | one side reflective composite panel

IP20

	CODE
	6322E0GB0
	6322E0NB0
	6322E0LB0
	6322E0BL0

OPTIONAL

G95 5W | E27 | phase-cut dim
gold mirror

	CODE
2200K | 370lm	9003E156
2700K | 410lm	9003E142

G95 5W | E27 | phase-cut dim
silver mirror

	CODE
2700K | 395lm	9003E157

3.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | one side reflective composite panel

IP20

	CODE
	6323E0GB0
	6323E0NB0
	6323E0LB0
	6323E0BL0

OPTIONAL

G95 5W | E27 | phase-cut dim
gold mirror

	CODE
2200K | 370lm	9003E156
2700K | 410lm	9003E142

G95 5W | E27 | phase-cut dim
silver mirror

	CODE
2700K | 395lm	9003E157

283
467
721 | 733






▶ DESIGN WITH LOVE




RESTAURANT EN VRAC MOUSCRON | BELGIUM

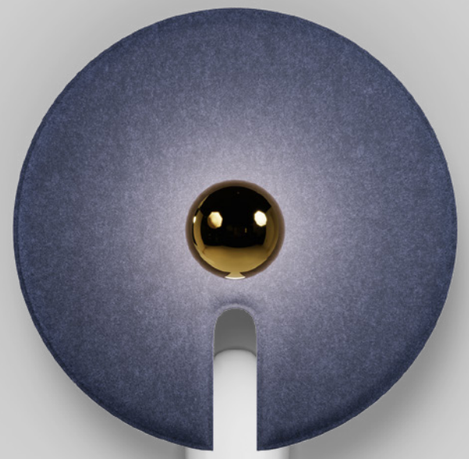

MIRRO SOFT

Wall surface









2.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | PET felt material
noise absorbing material

IP20

	CODE
	6322E0MF0
	6322E0LF0
	6322E0IF0
	6322E0AF0

OPTIONAL

G95 5W | E27 | phase-cut dim
gold mirror

	CODE
2200K | 370lm	9003E156
2700K | 410lm	9003E142

G95 5W | E27 | phase-cut dim
silver mirror

	CODE
2700K | 395lm	9003E157

G95 5.5W | E27 | phase-cut dim | opal

	CODE
2700K | 1060lm	9003E163

G95 4.5W | E27 | phase-cut dim | clear

	CODE
2700K |375lm	9003E160

3.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium |PET felt material
noise absorbing material

IP20

	CODE
	6323E0MF0
	6323E0LF0
	6323E0IF0
	6323E0AF0

OPTIONAL

G95 5W | E27 | phase-cut dim
gold mirror

	CODE
2200K | 370lm	9003E156
2700K | 410lm	9003E142

G95 5W | E27 | phase-cut dim
silver mirror

	CODE
2700K | 395lm	9003E157

G95 5.5W | E27 | phase-cut dim | opal

	CODE
2700K | 1060lm	9003E163


G95 4.5W | E27 | phase-cut dim | clear


	CODE
2700K |375lm	9003E160





CLEA

Wall surface

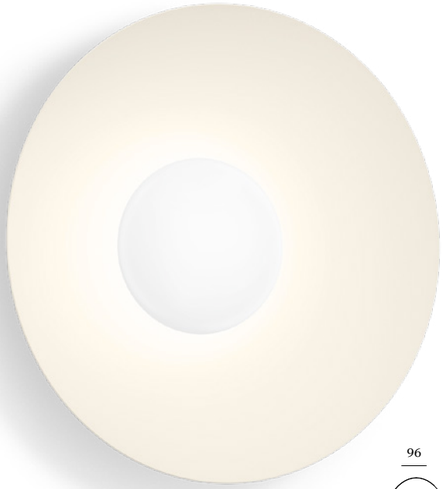







1.0

LED COB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white opal glass hand blown

IP20 L80|50K

	CODE
	181484W_
	181484LS_
	181484SG_
	181484FJ_
	181484B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	575	>90	3
3000K	610	>90	5

2.0

LED COB 11W| phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white opal glass hand blown

IP20 L80|50K

	CODE
	181584W_
	181584LS_
	181584SG_
	181584FJ_
	181584B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	575	>90	3
3000K	610	>90	5

3.0

LED COB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white opal glass hand blown


IP20 L80|50K

	CODE
	181684W_
	181684LS_
	181684SG_
	181684FJ_
	181684B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	565	>90	3
3000K	600	>90	5

287
557
back

MERCURE CHANTILLY | PROJECT MANAGED BY ATYPIO HOTELS RESORTS WITH ABP ARCHITECTS | L'OBSERVATOIRE DE LA NUIT
VINEUIL-SAINT-FIRMIN | FRANCE

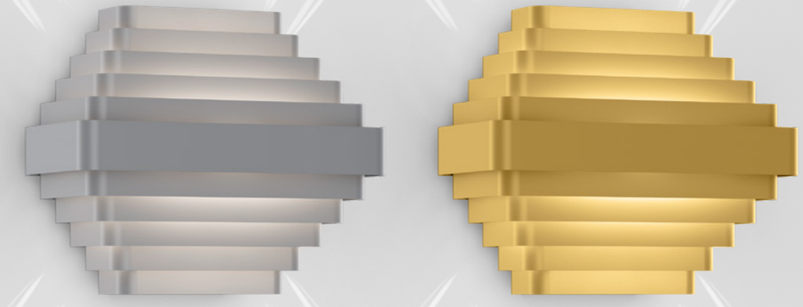


J.J.W.

Wall surface

289

479



01

2x A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium

IP20

	CODE
	2054E0S0
	2054E0G0

OPTIONAL

A60 3.8W | E27 | phase-cut dim
gold tinted

	CODE
2200K | 245lm	9003E109

A60 5.6W | E27 | phase-cut dim | clear

	CODE
2700K | 480lm	9003E138

JULES WABBES

back



FORUM OFFICE SINT-GILLIS-WAAS | BELGIUM

J.J.W.

Wall surface









02

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium

IP20

	CODE
	2055E0S0
	2055E0Q0
	2055E0G0

OPTIONAL

A60 3.8W | E27 | phase-cut dim
gold tinted

	CODE
2200K | 245lm	9003E109

A60 5.6W | E27 | phase-cut dim | clear

	CODE
2700K | 480lm	9003E138

JULES WABBES

back



ANDAZ VIENNA AM BELVEDERE | INNENARCHITEKTUR WIEN - ARCHISPHERE VIENNA | AUSTRIA



KVÄNUM KITCHEN | KVÄNUM DESIGN STUDIO COPENHAGEN | DENMARK

reddot award 2019
winner lighting design

ROOMOR

Wall surface



1.1

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-45°


	CODE
	338120BK1
	338120BB1

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 440lm	901228B3
3000K | 460lm	901228B5

more lamps and info on page 905



3.1

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel
cable plug with hand switch

IP20 0°-45°|0°-30°


	CODE
	339120BK1
	339120BB1

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 440lm	901228B3
3000K | 460lm	901228B5

more lamps and info on page 905



3.1

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel
cable base round

IP20 0°-45°|0°-30°

	CODE
	339220BK1
	339220BB1

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 440lm	901228B3
3000K | 460lm	901228B5

more lamps and info on page 905



back





BF2


BK3



BB4

reddot award 2019
winner lighting design

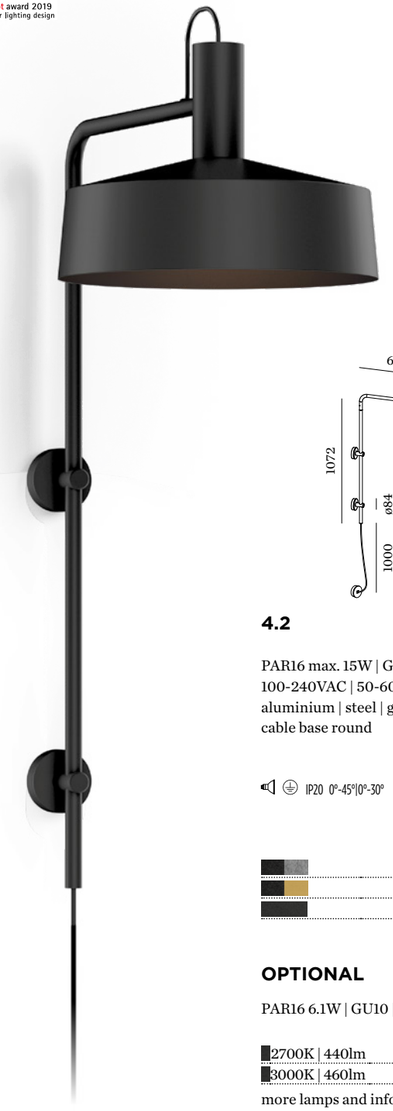

ROOMOR

Wall surface



4.2

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel | grey felt
cable base round

IP20 0°-45°|0°-30°


	CODE
	339620BF2
	339620BK2
	339620BB2

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 440lm	901228B3
3000K | 460lm	901228B5

more lamps and info on page 905



4.3

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel | grey felt
cable base round

IP20 0°-45°|0°-30°


	CODE
	339620BF3
	339620BK3
	339620BB3

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 440lm	901228B3
3000K | 460lm	901228B5

more lamps and info on page 905



4.4

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel
cable base round

IP20 0°-45°|0°-30°

	CODE
	339620BK4
	339620BB4

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 440lm	901228B3
3000K | 460lm	901228B5


more lamps and info on page 905




PRIVATE RESIDENCE | MAADSTUDIO MAREK SVOBODA CZECH REPUBLIC

DARF

Wall surface

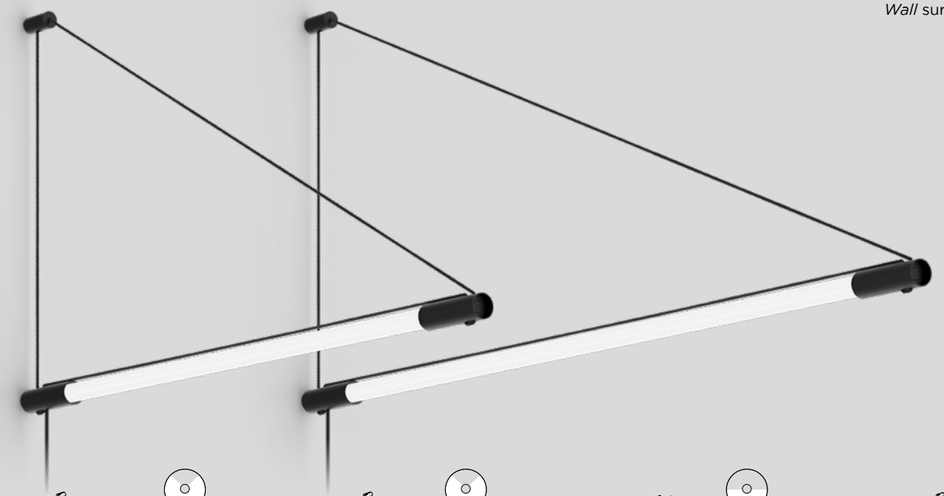




2.1

LED TUBE 10W | non dim
220-240VAC | 50-60Hz
aluminium
black textile cable plug with switch

IP20 L70|75K

3000K | CRI >80 | 1530lm

	CODE
	2567T7B4




3.1

LED TUBE 14W | non dim
220-240VAC | 50-60Hz
aluminium
black textile cable plug with switch

IP20 L70|75K

3000K | CRI >80 | 2300lm

	CODE
	2566T7B4




4.1

LED TUBE 23W | non dim
220-240VAC | 50-60Hz
aluminium
black textile cable plug with switch

IP20 L70|60K

	CODE
	2569T7B_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	3560	>80	4
4000K	3950	>80	6



4.2

LED TUBE 23W | phase-cut dim
220-240VAC | 50-60Hz
aluminium
black textile cable plug with dimmer switch

IP20 L70|50K

	CODE
	2569T8B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2780	>90	3
3000K	2940	>90	5

ARCHITECT | PHILIPP WEINBERGER & STUDIO MARCH GUT

back



PATISSERIE BRAASKMA LEEUWARDEN | THE NETHERLANDS


TUNE UP YOUR HEART PROJECT
weverducre.com/tune-up





PRIVATE RESIDENCE | SERBOLI BUREAU SPAIN

CG SQUARE

Wall surface

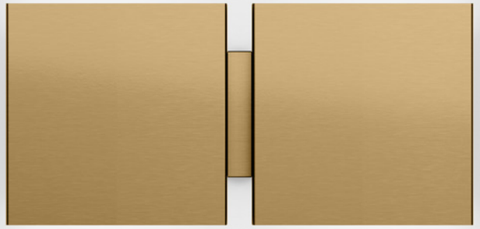





2P SMALL

QT14 2x max. 4W | G9
220-240VAC | 50-60Hz
steel

IP20

	CODE
	4001G0W0
	4001G0L0
	4001G0M0
	4001G0Q0
	4001G0B0

OPTIONAL

QT14 3.5W | G9 | phase-cut dim clear

	CODE
2700K | 340lm	9010G803
3000K | 350lm	9010G805

2G BIG

A60 2x max. 12W | E27
220-240VAC | 50-60Hz
steel

IP20

	CODE
	4002E0W0
	4002E0L0
	4002E0M0
	4002E0Q0
	4002E0B0

OPTIONAL

A60 5.6W | E27 | phase-cut dim | clear

	CODE
2700K | 480m	9003E138


CHRISTOPHE GEVERS

back





DOT


Wall surface

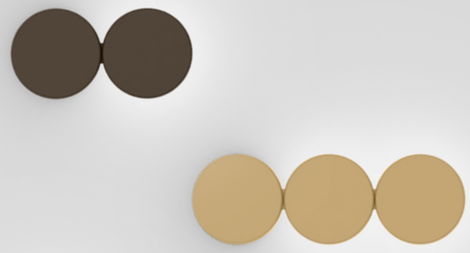









2.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PC cover

IP20 L80|55K

	CODE
	330164W_
	330164M_
	330164Q_
	330164B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	420	>90	3
3000K	435	>90	5

3.0

LED COB 16W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PC cover

IP20 L80|55K

	CODE
	330264W_
	330264M_
	330264Q_
	330264B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x395	>90	3
3000K	2x425	>90	5

4.0

LED COB 22W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium |PC cover

IP20 L80|55K

	CODE
	330464W_
	330464M_
	330464Q_
	330464B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	3x400	>90	3
3000K	3x405	>90	5

back




CREATE YOUR OWN TAPIS
weverducre.com/tapis-configurator

PRIVATE RESIDENCE | UNIQUE RENOVATIONS BELGIUM

TAPIS

Wall surface





1.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
composite | aluminium

IP20 L80|50K

	CODE
	336174FJ_
	336174GW_
	336174ST_
	336174RA_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	450	>90	3
3000K	480	>90	5

back



PRIVATE RESIDENCE | STUDIO 05 BELGIUM



EOAK FLOORS SHOWROOM | VIGONARCHITECTS HANOI | VIETNAM


CREATE YOUR OWN TAPIS
weverducre.com/tapis-configurator




DAS SEEHÄUSER | WOODSPACE MATTSEE | AUSTRIA

TAPIS

Wall surface

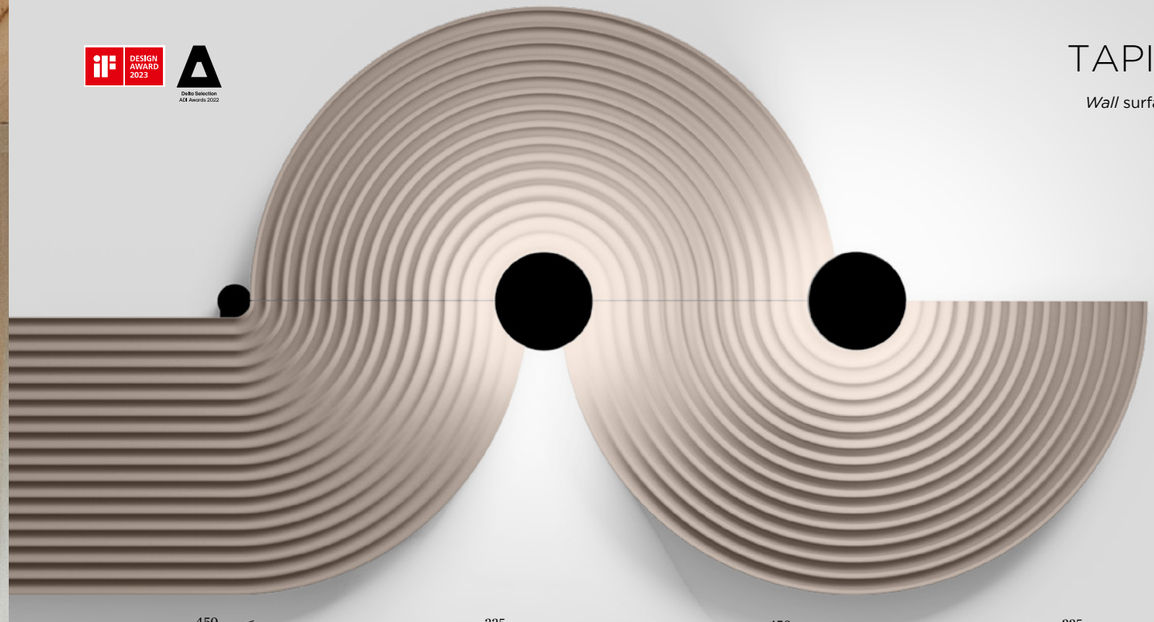




2.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
composite | aluminium

IP20 L80|50K

	CODE
	336274FJ_
	336274GW_
	336274ST_
	336274RA_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	465	>90	3
3000K	500	>90	5




3.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
composite | aluminium

IP20 L80|50K

	CODE
	336374FJ_
	336374GW_
	336374ST_
	336374RA_


LIGHT COLOUR	LUMEN	CRI	CODE
2700K	465	>90	3
3000K	500	>90	5



2.1

composite | aluminium

	CODE
	336200FJ0
	336200GW0
	336200ST0
	336200RA0



3.1

composite | aluminium

	CODE
	336300FJ0
	336300GW0
	336300ST0
	336300RA0

back





HAIDRESSER JANSEN KAPPERS | EMPOWER SPACES BEEK EN DONK | THE NETHERLANDS


mixology winner


TAPIS SOFT

Wall surface

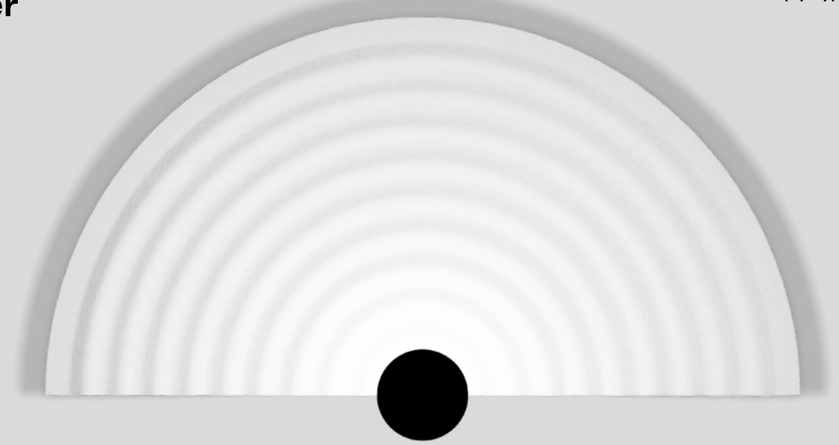







1.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PET felt material
noise absorbing material

IP20 L80|50K

	CODE
	336174WF_
	336174MF_
	336174LF_
	336174OF_
	336174IF_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	410	>90	3
3000K	435	>90	5

2.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PET felt material
noise absorbing material

IP20 L80|50K

	CODE
	336274WF_
	336274MF_
	336274LF_
	336274OF_
	336274IF_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	440	>90	3
3000K	470	>90	5

2.1

aluminium | PET felt material
noise absorbing material

	CODE
	336200WF0
	336200MF0
	336200LF0
	336200OF0
	336200IF0

back






RESTAURANT L'APERICENA TIME | ARCH. LEONARDO PORCELLI - STILEMI RIVAROLO CANAVESE | ITALY



mixology winner

TAPIS SOFT

Wall surface




3.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PET felt material
noise absorbing material

IP20 L80|50K

	CODE
	336374WF_
	336374MF_
	336374LF_
	336374OF_
	336374IF_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	440	>90	3
3000K	470	>90	5




4.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PET felt material
noise absorbing material

IP20 L80|50K

	CODE
	336474WF_
	336474MF_
	336474LF_
	336474OF_
	336474IF_


LIGHT COLOUR	LUMEN	CRI	CODE
2700K	440	>90	3
3000K	470	>90	5



3.1

aluminium | PET felt material
noise absorbing material

	CODE
	336300WF0
	336300MF0
	336300LF0
	336300OF0
	336300IF0



4.1

aluminium | PET felt material
noise absorbing material

	CODE
	336400WF0
	336400MF0
	336400LF0
	336400OF0
	336400IF0


back




PRIVATE RESIDENCE | AJ ARCHITECTEN BELGIUM


MILES

Wall surface

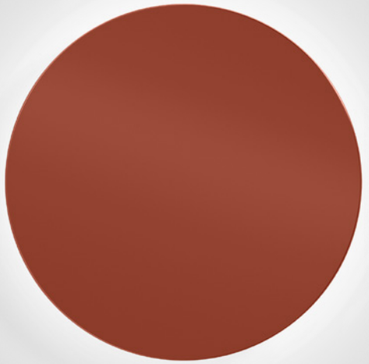







2.0 ROUND

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP20 L80|60K

		CODE
		317578W_
		317578G_
		317578M_
		317578Q_
		317578P_
		317578SG_
		317578CC_
		317578ME_
		317578B_
	marble	317578MW_
	marble	317578MB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	610	>90	3
3000K	620	>90	5


3.0 ROUND


LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP20 L80|60K

		CODE
		317778W_
		317778G_
		317778M_
		317778Q_
		317778P_
		317778SG_
		317778CC_
		317778ME_
		317778B_
	marble	317778MW_
	marble	317778MB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	610	>90	3
3000K	620	>90	5





back








PRIVATE RESIDENCE | UP FOR GRABS INTERIORS UNITED KINGDOM


MILES

Wall surface









2.0 CARRÉ

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP20 L80|60K

		CODE
		317478W_
		317478G_
		317478M_
		317478Q_
		317478P_
		317478B_
	marble	317478MW_
	marble	317478MB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	610	>90	3
3000K	620	>90	5


3.0 CARRÉ


LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP20 L80|60K

		CODE
		317678W_
		317678G_
		317678M_
		317678Q_
		317678P_
		317678B_
	marble	317678MW_
	marble	317678MB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	610	>90	3
3000K	620	>90	5





back




MILES

Wall surface








9.0

LED PCB 31W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP20 L80|60K

	CODE
	317878W_
	317878G_
	317878B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1540	>90	3
3000K	1560	>90	5




12.0

LED PCB 38W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP20 L80|60K

	CODE
	317978W_
	317978G_
	317978B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2110	>90	3
3000K	2130	>90	5





back

LARRA

Wall surface







1.0

LED TUBE 7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal glass

IP20 L70|15K

	CODE
	1966T8W_
	1966T8L_
	1966T8M_
	1966T8P_
	1966T8Q_
	1966T8GM_
	1966T8B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	700	>90	3
3000K	720	>90	5

2.0

LED TUBE 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal glass

IP20 L70|15K

	CODE
	1967T8W_
	1967T8L_
	1967T8M_
	1967T8P_
	1967T8Q_
	1967T8GM_
	1967T8B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	800	>90	3
3000K	820	>90	5

back





OFFICE COPTHALL BRIDGE HOUSE | EKHO STUDIO HARROGATE | UNITED KINGDOM


reddot winner 2023

FINLIN

Wall surface

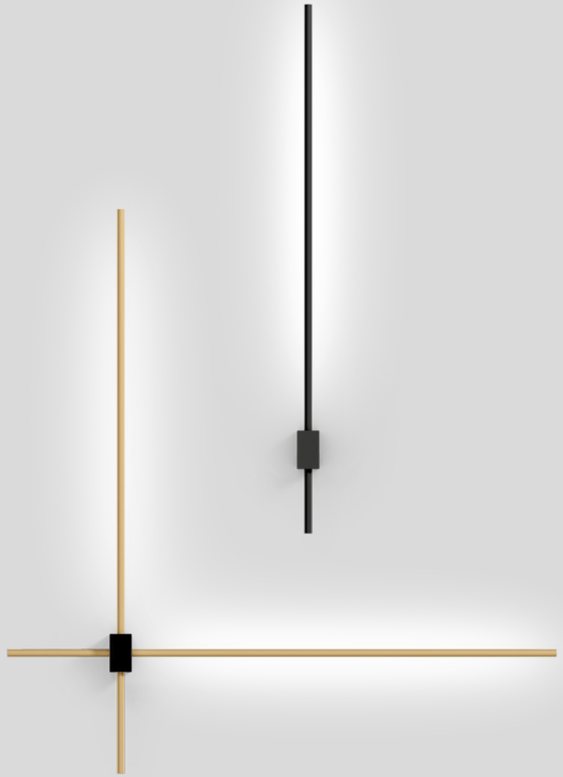





263

433

727

1.0

LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser

IP20 L80|50K

	CODE
	370584CH_
	370584B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	450	>90	3
3000K	485	>90	5

4.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser

IP20 L80|50K

	CODE
	370884CH_
	370884B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	895	>90	3
3000K	965	>90	5

OPTIONAL

spacer 10mm for overlapping


	CODE
	900195B0

specs on page 911

back



BIURA TIXE | 53 STUDIO BIELSKO-BIAŁA | POLAND

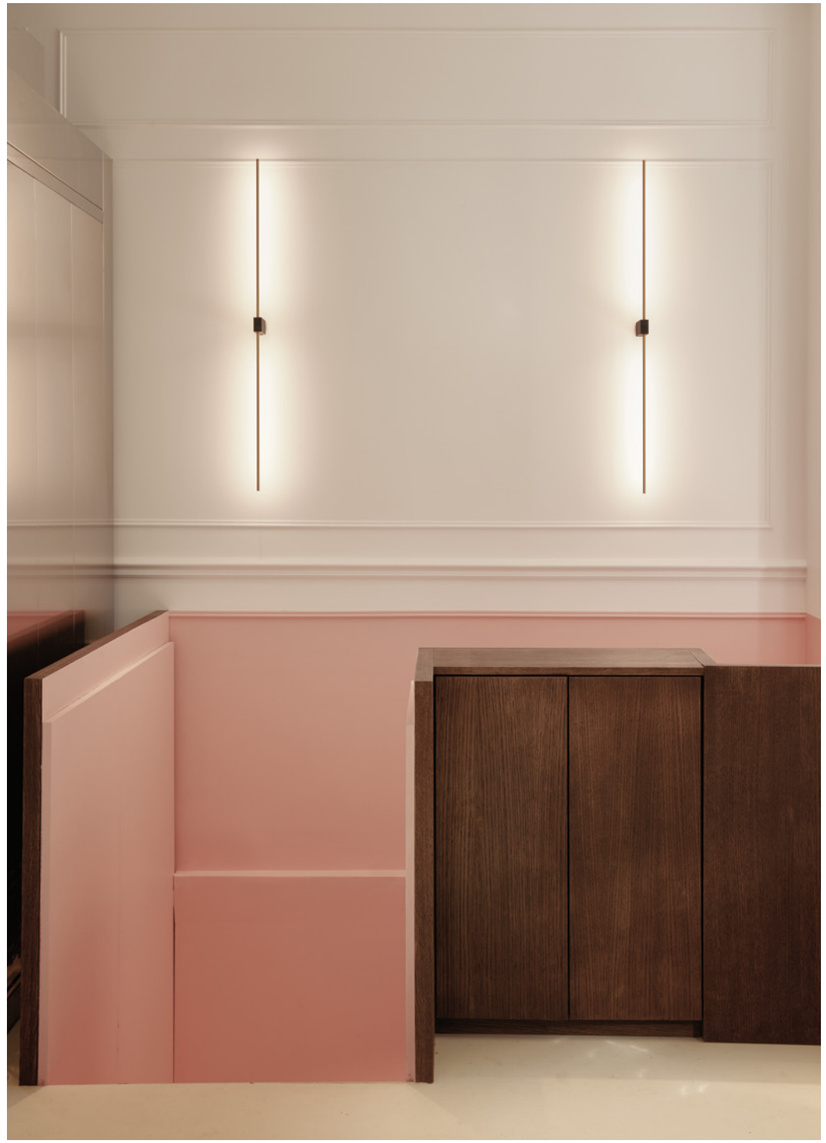


PASTRY SHOP DONATIEN MAÎTRE ECLAIR | STUDIO CARRÉ – PAUL LEVAILLANT PARIS | FRANCE


DESIGN AWARD 2024

reddot winner 2023

FINLIN

Wall surface

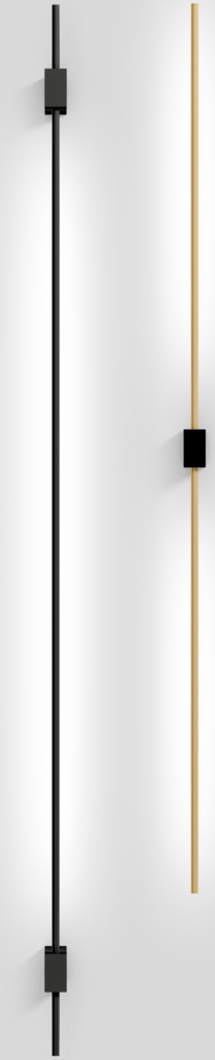





2.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser

IP20 L80|50K

	CODE
	370684CH_
	370684B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	895	>90	3
3000K	965	>90	5

3.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser

IP20 L80|50K

	CODE
	370784CH_
	370784B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	895	>90	3
3000K	965	>90	5

OPTIONAL

spacer 10mm for overlapping

	CODE
	900195B0

specs on page 911

263
433
727
back



DESIGN AWARD 2024


reddot winner 2023

FINLIN

Wall surface

263
433
727





1.0 ROUND

LED PCB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser

IP20 L80|50K

	CODE
	371184CH_
	371184B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1180	>90	3
3000K	1280	>90	5



OPTIONAL

spacer 10mm for overlapping

	CODE
	900196B0

specs on page 911


back



reddot winner 2024

FIL SPIN

Wall surface

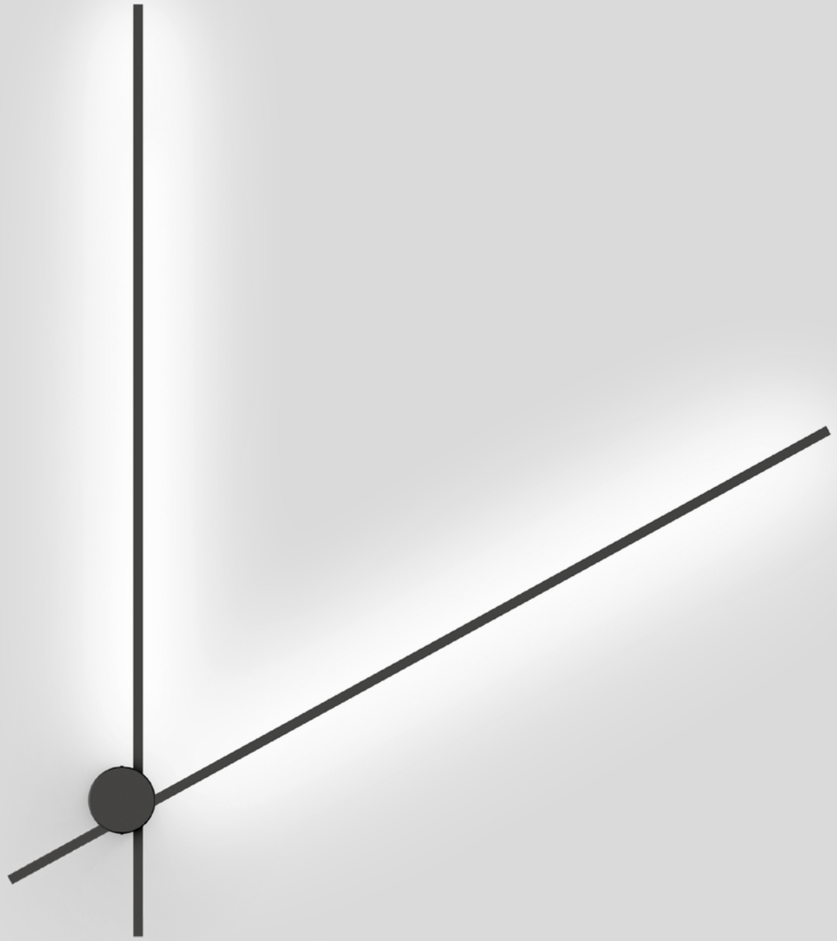




back

267

441



1.0

LED PCB 24W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | indir. light

IP20 180° L80|100K

2700K | CRI >90 | 2x905lm

CODE


254584B3



PRIVATE RESIDENCE | STUDIO PALINPERÄ OY FINLAND

VENN

Wall surface

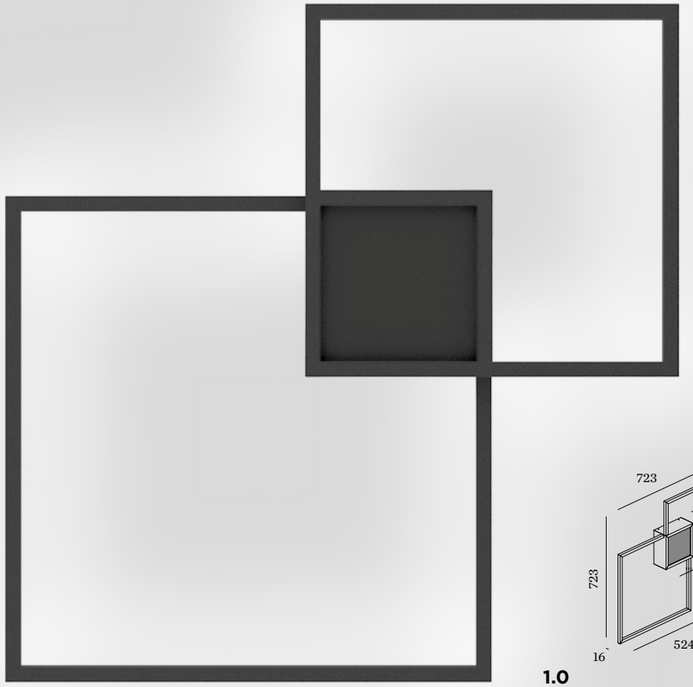


1.0

LED PCB 42W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA cover
indirect light

IP20 L70|55K

	CODE
	149184W_
	149184Q_
	149184B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	3410	>90	3
3000K	3510	>90	5



2.0

LED PCB 49W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA cover dir./
indirect light

IP20 L70|55K

	CODE
	149284W_
	149284Q_
	149284B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	480/3920	>90	3
3000K	495/4035	>90	5

CREATE YOUR OWN VENN
weverducre.com/venn-configurator

S&R CORNELISSEN

back



PRIVATE RESIDENCE AUSTRIA

reddot winner 2023

MATCH snooze

Wall surface 61 | 137 | 153

193


329 | 347

415 | 509

571

723 | 729





1.0

LED COB 5W
220-240VAC | 50-60Hz | incl. driver
aluminium
incl. switch on/off

IP20 0°-90°|350° M-30° L80|50K

	CODE
	177353W_
	177353Q_
	177353B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	330	>90	3
3000K	345	>90	5

back




PRIVATE RESIDENCE | NORDIC STANDARD SPAIN

DESIGN AWARD 2021

reddot winner 2020
lighting design


MICK snooze

Wall surface

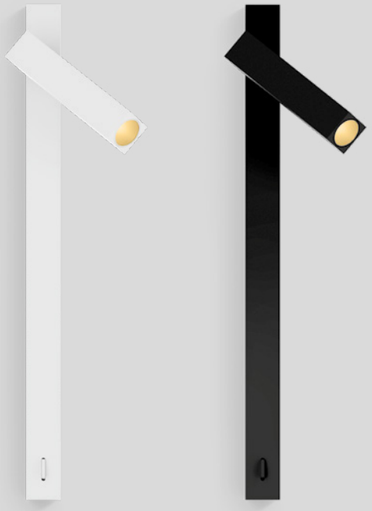







1.0

LED COB 8W
220-240VAC | 50-60Hz | incl. driver
aluminium
incl. switch on/off

IP20 0°-90°|350° M-23° L80|50K

	CODE
	159643J_
	159643K_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	185	>90	3
3000K	200	>90	5

S&R CORNELISSEN

back




PRIVATE RESIDENCE | IN-BETWEEN ARCHITECTS LIMITED HONG KONG

SARA snooze

Wall surface












203



365



1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
incl. switch on/off

IP20 0°-90°|330°

	CODE
	157320W0
	157320G0
	157320K0
	157320B0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5

more lamps and info on page 905


back





MICK

Wall surface

199
333

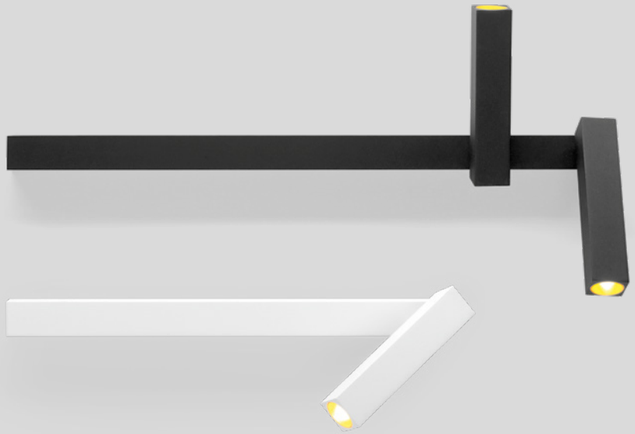





1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-90°|350° M-23° L80|50K





	CODE
	159344J_
	159344K_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	235	>90	3
3000K	245	>90	5

2.0

LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-90°|350° M-23° L80|50K

	CODE
	159244J_
	159244K_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x215	>90	3
3000K	2x225	>90	5




PRIVATE RESIDENCE | ABOUT - ARCHITECTURE & PHOTOGRAPHY ITALY

DOMINO

Wall surface





1.0

LED PCB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 L80|60K

	CODE
	3371A4W_
	3371A4B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1180	>80	2
3000K	1190	>80	4


back



SCAVA

Wall surface





1.0

LED PCB 25W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PC cover

IP20 L80|50K

	CODE
	350188W_
	350188GB_
	350188B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1830	>90	3
3000K	1910	>90	5


back



PRIVATE RESIDENCE BELGIUM

HAJO IP44

Wall surface

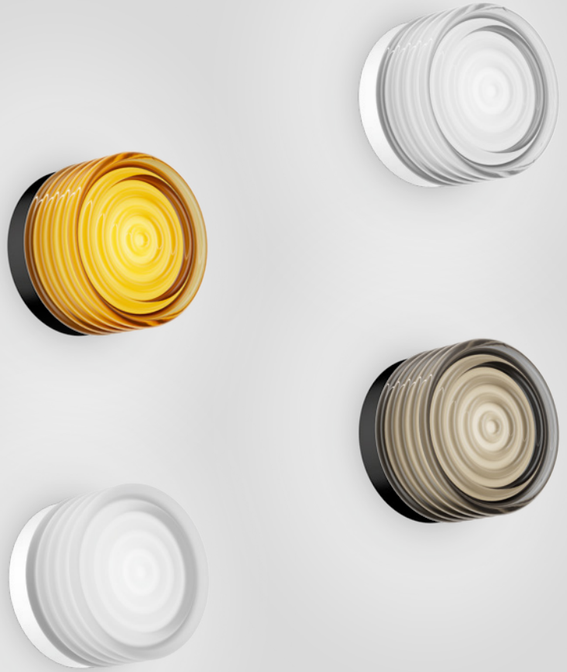



1.0

LED COB 9W | dimmable
220-240VAC | 50-60Hz | incl. driver
glass | aluminium

IP20 L80|50K

phase-cut dim

CODE
346184WC_
346184WW_
346184WA_
346184WB_
346184BC_
346184BW_
346184BA_
346184BB_

DALI-2

CODE
346185WC_
346185WW_
346185WA_
346185WB_
346185BC_
346185BW_
346185BA_
346185BB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	420	>90	3
3000K	440	>90	5

S&R CORNELISSEN

back








PERLEZ IP44


Wall surface


169

271 | 275 | 295









1.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal glass
mirror thickness 3-6mm

IP44 L80|50K

50-52

	CODE
	192484W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	520	>95	3
3000K	550	>95	5
4000K	580	>95	7

2.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal glass
mirror thickness 3-6mm

IP44 L80|50K

50-52

	CODE
	192584W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	600	>95	3
3000K	630	>95	5
4000K	665	>95	7

3.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal glass
mirror thickness 3-6mm

IP44 L80|50K

50-52

	CODE
	192684W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	645	>95	3
3000K	665	>95	5
4000K	705	>95	7

back



PRIVATE RESIDENCE GREECE

PERLEZ CLIP IP44

Wall surface




1.0 CLIP

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal glass
mirror thickness 2-7mm
slides over the mirror

IP44 L80|50K

	CODE
	392484W_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	550	>95	5
4000K	580	>95	7




2.0 CLIP

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal glass
mirror thickness 2-7mm
slides over the mirror

IP44 L80|50K

	CODE
	392584W_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	630	>95	5
4000K	665	>95	7



3.0 CLIP

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal glass
mirror thickness 2-7mm
slides over the mirror

IP44 L80|50K

	CODE
	392684W_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	665	>95	5
4000K	705	>95	7



back





PRIVATE RESIDENCE | RAUMTAKT GMBH SWITZERLAND


MIRBA IP44

Wall surface









1.0

LED PCB 4/6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA
output selector

IP44 L80|50K

	CODE
	328188W_
	328188BW_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	L 375/H 645	>90	3
3000K	L 395/H 670	>90	5

2.0

LED PCB 6/9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA
output selector

IP44 L80|50K

	CODE
	328288W_
	328288BW_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	L 535/H 920	>90	3
3000K	L 575/H 960	>90	5

3.0

LED PCB 8/12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA
output selector

IP44 L80|50K

	CODE
	328388W_
	328388BW_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	L 730/H 1290	>90	3
3000K	L 770/H 1350	>90	5




back

MIRBI long IP44

Wall surface






1.0

LED PCB 5/7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA
output selector

IP44 L80|60K

	CODE
	329188W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	255/420	>90	3
3000K	265/435	>90	5




2.0

LED PCB 8/13W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA
output selector

IP44 L80|60K

	CODE
	329288W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	445/815	>90	3
3000K	460/840	>90	5



3.0

LED PCB 13/19W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA
output selector

IP44 L80|60K

	CODE
	329388W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	735/1220	>90	3
3000K	755/1250	>90	5




back



RIBELLE IP65

Wall surface





1.0

LED PCB 5W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | ribbed glass

IP65 L80|100K

3000K | CRI >90 | 425lm

	CODE
	772184W5
	772184M5
	772184B5

825


867

back



PAVIO IP65

Wall surface

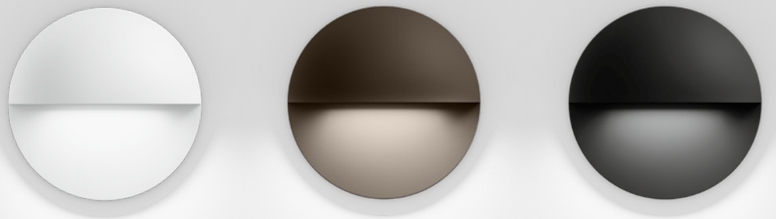



1.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|100K

3000K | CRI >90 | 525lm

	CODE
	351184W5
	351184Q5
	351184B5

831

back

Table | Floor

712 – 735

TABLE



DRO
715



DRO
717



CG01
719



MIRRO
721



MATCH
723



ROOMOR
725

FLOOR



DRO
715



FINLIN
727



MATCH
729



DRO
731



MIRRO
733



ROOMOR
735

back




APT GRAND KOLIBA | SALPIETRA & GAJDOS ARCHITECTS SLOVAKIA

DRO

Table / Floor

279
373
465
623



1.0

QT14 max. 5W | G9
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass
cable plug with switch


IP20

CODE
6421G0WB0

OPTIONAL

QT14 3.5W | G9 | phase-cut dim clear

CODE
2700K | 340lm 9010G803
3000K | 350lm 9010G805



2.0

C35 max. 6W | E14 | dimmable
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass
cable plug with dimmer switch


IP20

CODE
6422C0WB0

OPTIONAL

C35 5.5W | E14 | phase-cut dim
opal

CODE
2700K | 450lm 9003C103



3.0

A60 max. 12W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass
cable plug with dimmer switch

IP20

CODE
6423E0WB0

OPTIONAL


A60 9W | E27 | phase-cut dim
opal

CODE
2700K | 800lm 9003E152




DRO

Table

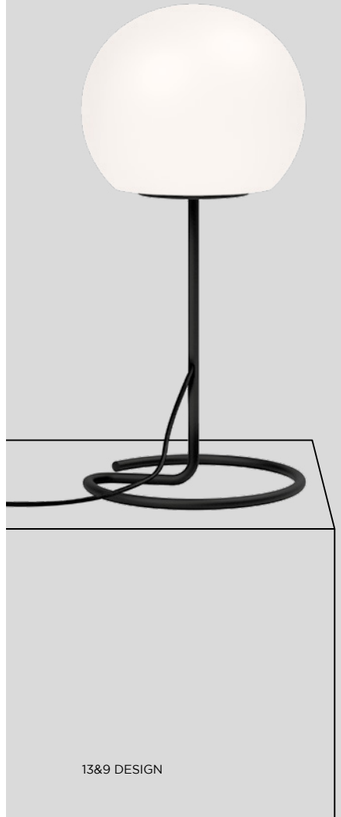

13&9 DESIGN



2.0

C35 max. 6W| E14 | dimmable
220-240VAC | 50-60Hz
aluminium | steel
artisanal Italian hand blown glass
cable plug with dimmer switch

IP20

CODE


6432C0WB0

OPTIONAL

C35 5.5W | E14 | phase-cut dim | opal

CODE

2700K | 450lm 9003C103



3.0

A60 max. 12W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium | steel
artisanal Italian hand blown glass
cable plug with dimmer switch

IP20

CODE

6433E0WB0

OPTIONAL

A60 9W | E27 | phase-cut dim | opal

CODE

2700K | 800lm 9003E152


back



PRIVATE RESIDENCE BELGIUM

CG01

Table





CHRISTOPHE GEVERS

back

CG01

T25 max. 6W | E14
220-240VAC | 50-60Hz
steel
cable plug with dimmer switch

IP20

	CODE
	4011C0YE0
	4011C0RE0
	4011C0AU0
	4011C0BE0
	4011C0B0

OPTIONAL

T25-85 5W | E14 | phase-cut dim
gold tinted


	CODE
2200K | 460lm	9003C108
2500K | 480lm	9003C107
2700K | 500lm	9003C106

MIRRO

Table







1.0

A60 max. 15W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium | steel | one side reflective composite panel
cable plug with dimmer switch

IP20

	CODE
	6301E0GB0
	6301E0NB0
	6301E0LB0
	6301E0BL0


OPTIONAL

A60 5.5W | E27 | phase-cut dim
gold mirror

	CODE
2700K | 405lm	9003E139

A60 5.5W | E27 | phase-cut dim
silver mirror

	CODE
2700K | 405lm	9003E140

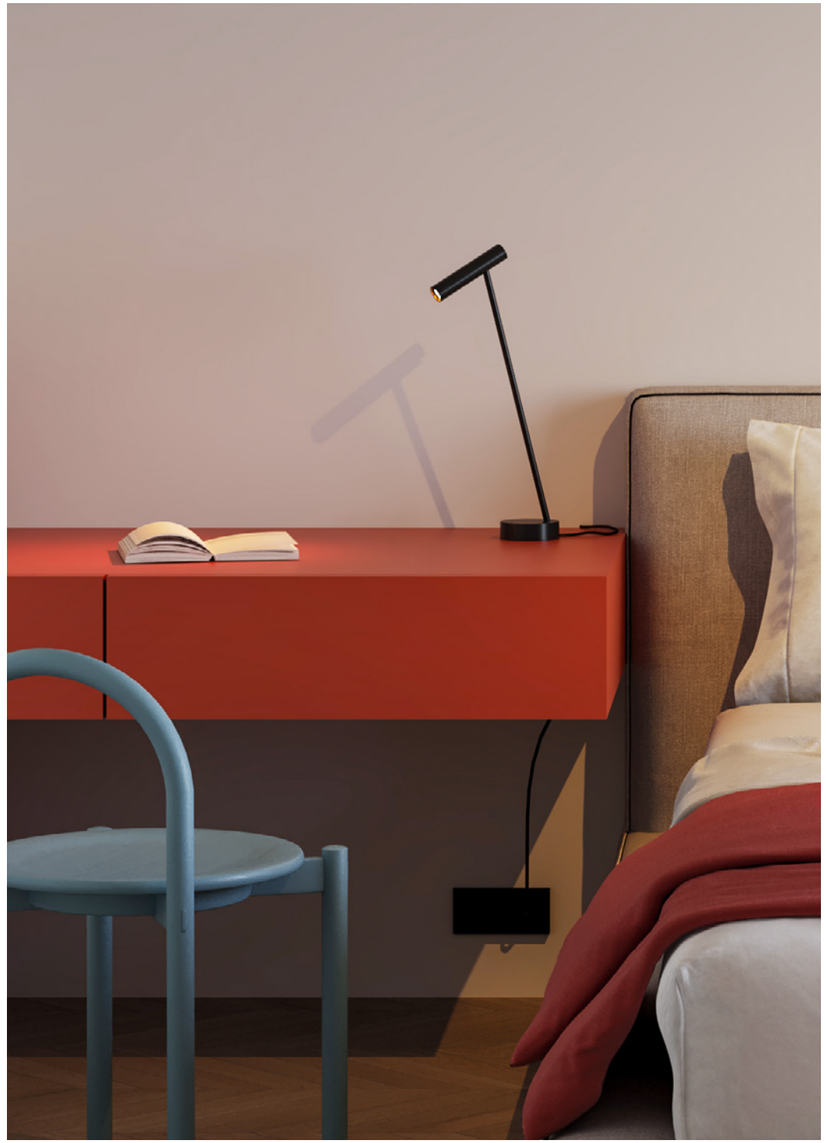

MATCH

Table 61 | 137 | 153


193


329 | 347

415 | 509

571

589 | 685

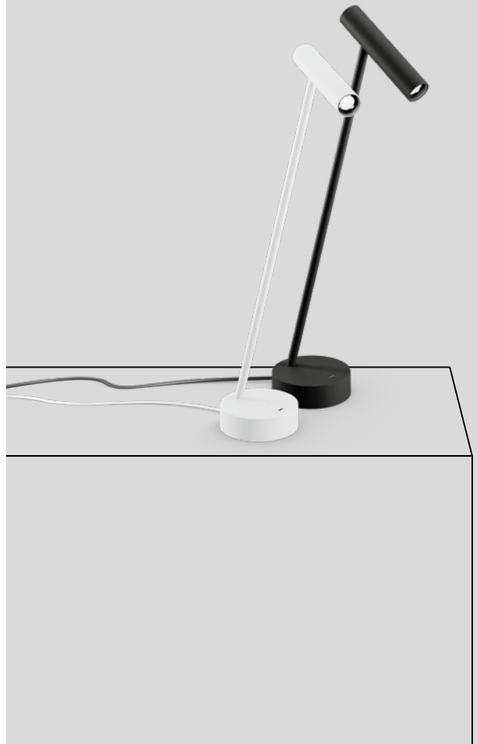



1.0

LED COB 8W | dimmable
220-240VAC | 50-60Hz | incl. driver
aluminium
incl. switch on / off | push dim
incl. USB-C port

IP20 45°|0°-145° M-30° L80|50K

2700K | CRI >90 | 505lm

	CODE
	477254W3
	477254B3

back



HOTEL LOPESAN | EMILIO PELLEJERO FARO | SPAIN

reddot award 2019
winner lighting design

ROOMOR

Table





back



1.1

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel
cable plug with hand switch
CH and UK variants online

IP20 0°-45°|0°-30°

	CODE
	637120GG1
	637120RR1
	637120BK1
	637120BB1

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 445lm	901228W3
2700K | 440lm	901228B3
3000K | 465lm	901228W5
3000K | 460lm	901228B5


more lamps and info on page 905

FINLIN

Floor







back

263

433

673 | 679



1.0

LED PCB 16W | dimmable
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser
cable plug with dimmer switch

IP20 0°-10°|360° L80|50K

2700K | CRI >90 | 1360lm

CODE
470184W3
470184B3

MATCH

Floor 61 | 137 | 153

193


329 | 347

415 | 509


571

589 | 685




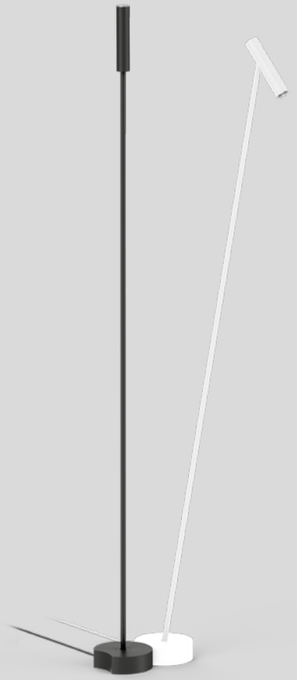





back



1.0

LED COB 8W | dimmable
220-240VAC | 50-60Hz | incl. driver
aluminium
integrated dimmer button

IP20 0°-10°|360°|0°-145° M-30° L80|50K

2700K | CRI >90 | 505lm


	CODE
	477354W3
	477354B3



PRIVATE RESIDENCE | ERIBO STIJLBOUWERS BELGIUM


DRO

Floor

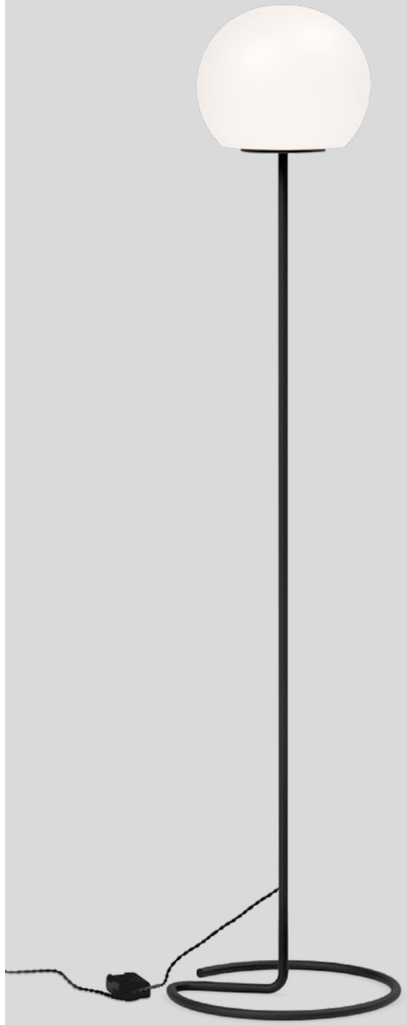

13&9 DESIGN

279
373
465
623



3.0

A60 max. 12W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium | steel
artisanal Italian hand blown glass
cable plug with dimmer switch

IP20

CODE

6442E0WB0

OPTIONAL

A60 9W | E27 | phase-cut dim | opal

CODE

2700K | 800lm 9003E152

back






MIRRO

Floor

283
467
625



2.0

G95 max. 15W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium | steel | one side reflective composite panel
cable plug with dimmer switch

IP20

	CODE
	6311E0GB0
	6311E0NB0
	6311E0LB0
	6311E0BL0


OPTIONAL

G95 5W | E27 | phase-cut dim
gold mirror

	CODE
2200K | 370lm	9003E156
2700K | 410lm	9003E142

G95 5W | E27 | phase-cut dim
silver mirror

	CODE
2700K | 955lm	9003E157



3.0

G95 max. 15W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium | steel | one side reflective composite panel
cable plug with dimmer switch

IP20

	CODE
	6312E0GB0
	6312E0NB0
	6312E0LB0
	6312E0BL0

OPTIONAL

G95 5W | E27 | phase-cut dim
gold mirror

	CODE
2200K | 370lm	9003E156
2700K | 410lm	9003E142


G95 5W | E27 | phase-cut dim
silver mirror

	CODE
2700K | 955lm	9003E157



BV PARSHIP | JOPPICH & RIECKHOFF | SEEL BOBSIN PARTNER HAMBURG | GERMANY

reddot award 2019
winner lighting design

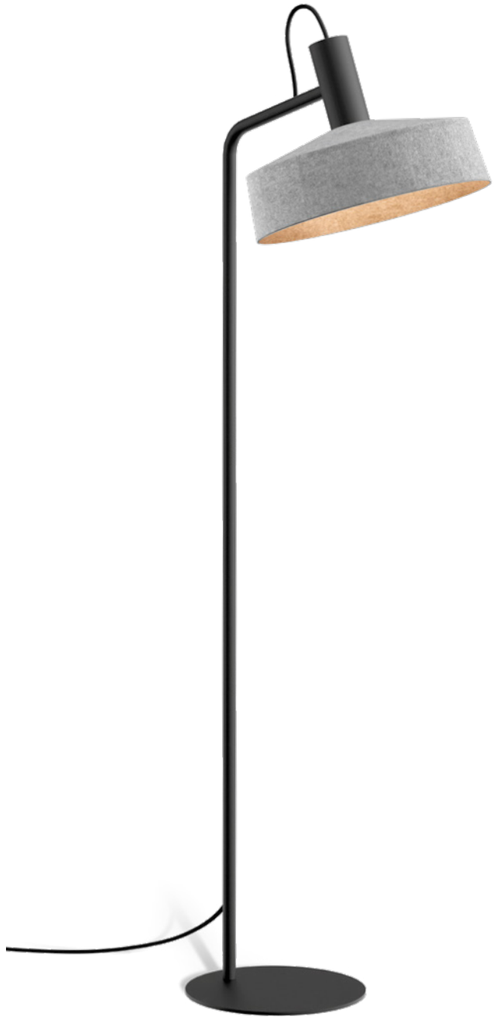


ROOMOR

Floor







1.2

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel | grey felt
cable with floor switch
CH and UK variants online

IP20 0°-45°|0°-30°


	CODE
	638120BF2
	638120BK2
	638120BB2

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 440lm	901228B3
3000K | 460lm	901228B5

more lamps and info on page 905



1.3

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel | grey felt
cable with floor switch
CH and UK variants online

IP20 0°-45°|0°-30°

	CODE
	638120BF3
	638120BK3
	638120BB3

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CODE
2700K | 440lm	901228B3
3000K | 460lm	901228B5

more lamps and info on page 905

back

outdoor

Ceiling recessed

738 – 749

RECESSED



DEEP BIJOU
741



DEEP PETIT
743



DEEP
745



TAIO
747



INTRA
749

back



PRIVATE RESIDENCE | MINDAUGAS LELIŪGA LITHUANIA

DEEP bijou

Outdoor
Ceiling recessed

99 | 157





1.0

LED COB 4W | 500mA | 8V
aluminium

IP65 M-30° L80|55K

wire springs 50-52 85 4-25

	CODE
	165361W_
	165361Q_
	165361B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	470	>90	3
3000K	495	>90	5

IC rated

ALWAYS USE

driver | IP67

	CODE
7W | 500mA	90214301

more options and specs on page 899

MORE VERSIONS ONLINE
weverducre.com/more-deep-bijou-ip65

back





PRIVATE RESIDENCE GREECE

DEEP petit

Outdoor
Ceiling recessed

101 | 159









1.0

LED COB 6W | 350mA | 17V
aluminium

IP65 M-31° L80|50K

wire springs 68-70 85 4-25

	CODE
	153761W_
	153761Q_
	153761B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	590	>90	3
3000K	610	>90	5



ALWAYS USE

driver | 350mA | IP68

	CODE
17W	90213602

more options and specs on page 897

back




DEEP

Outdoor
Ceiling recessed

105 | 161









1.0

LED COB 6/9W | 350/500mA | 17V
aluminium

IP65 M-33° L80|55K

wire springs 86-89 85 4-27

	CODE
	184161W_
	184161Q_
	184161B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	485/640	>90	3
3000K	510/690	>90	5

ALWAYS USE

driver | IP68

	CODE
17W | 350mA	90213602
24W | 500mA	90214702

more options and specs on page 897

MORE VERSIONS ONLINE
weverducre.com/more-deep-ip65

IC rated

back



TAIO

Outdoor
Ceiling recessed





1.0

LED COB 6/9W | 350/500mA | 18V
aluminium
opal glass convex lens

IP65 W-105° L80|55K g

wire springs 68-73 80 4-27

	CODE
	180781W_
	180781G_
	180781Q_
	180781B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	340/455	>90	3
3000K	370/495	>90	5

IC rated

ALWAYS USE

driver | IP68

	CODE
17W | 350mA	90213602
24W | 500mA	90214702

more options and specs on page 897

back



PRIVATE RESIDENCE | KILLIAN GARTNER AUSTRIA

INTRA

Outdoor
Ceiling recessed







1.0 OPAL

LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | polyamide
opal PMMA cover

IP65 L70|60K

blade springs 76-79 70 min. 8

3000K | CRI >90 | 410lm

	CODE
	733188W5
	733188A5
	733188B5

2.0 SPOT

LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | polyamide
clear lens

IP65 W-45° L70|50K

blade springs 76-79 70 min. 8

3000K | CRI >90 | 560lm

	CODE
	733268W5
	733268A5
	733268B5

back

Ceiling surface / suspended

750 – 777

SURFACE



TRAM
753



TUBE
755



TAIO
757



RAY
759



TRAIN
761



TUBE CARRÉ
763



BOX
765



BLAS 1.0
767



BLAS 2.0
767



ROB
769



ROSS
771



TRADORA
775

SUSPENDED



TRADORA
777

back



PRIVATE RESIDENCE | ATELIER B AUSTRIA

TRAM

Outdoor
Ceiling surface





1.0

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium


IP65 M-36° L70|55K

3000K | CRI >90 | 555lm

	CODE
	747768W5
	747768A5
	747768Q5
	747768B5

797

back

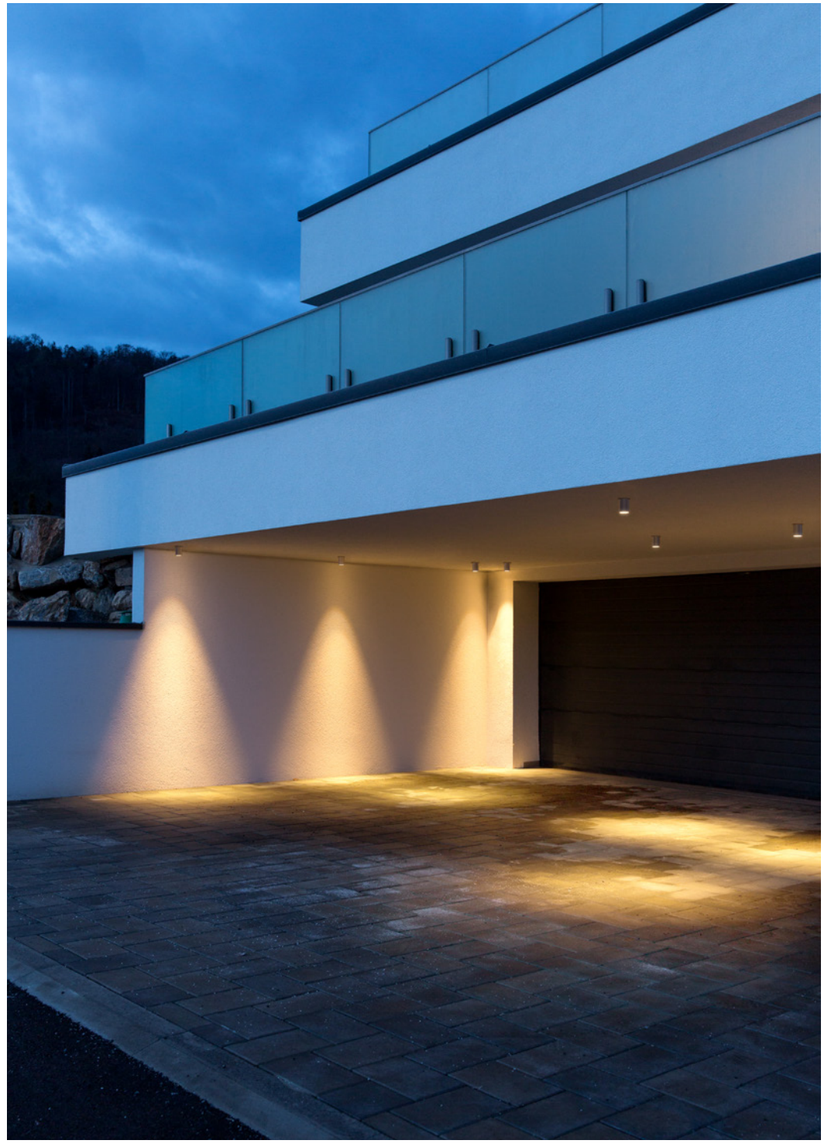

PRIVATE RESIDENCE AUSTRIA

TUBE

Outdoor
Ceiling surface







1.0 LED

LED COB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 M-36° L80|60K

3000K | CRI >90 | 620lm

	CODE
	734364W5
	734364D5
	734364A5
	734364B5

1.0 PAR16

PAR16 max. 5W | GU10
100-240VAC | 50-60Hz
aluminium

IP65

	CODE
	734120W0
	734120D0
	734120A0
	734120Q0
	734120B0

OPTIONAL

PAR16 3.7W | GU10

	CODE
2700K | 350lm	905227S2
3000K | 350lm	905227S4

799

back



PRIVATE RESIDENCE BELGIUM

TAIO

Outdoor
Ceiling surface





1.0

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
opal glass convex lens

IP65 W-105° L80|55K

	CODE
	180884W_
	180884A_
	180884Q_
	180884B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	455	>90	3
3000K	510	>90	5

back

165
299
747
803



SHOP PHILMODE | ERIC FRANSSENS BEAUFAYS | BELGIUM

RAY

Outdoor
Ceiling surface







OPTIONAL

inner cover

	CODE
	911041W1
	911041D1
	911041A1
	911041B1

1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 M-21° L70|50K


	CODE
	735458W_
	735458D_
	735458A_
	735458B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	670	>90	3
3000K	700	>90	5
2000-3000K	470	>90	9

back

251
341 | 377 | 393
537
615
805



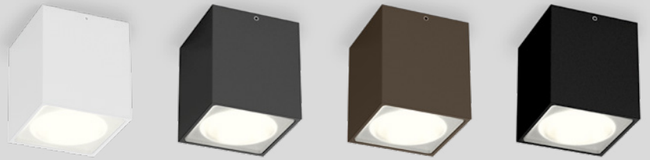

TRAIN

Outdoor
Ceiling surface



1.0

LED COB 6W| phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 M-36° L70|55K

3000K | CRI >90 | 530lm

	CODE
	718668W5
	718668A5
	718668Q5
	718668B5

807

back



PRIVATE RESIDENCE | SPADO ARCHITECTS AUSTRIA

TUBE CARRÉ

Outdoor
Ceiling surface
















1.0 LED

LED COB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 M-32° L80|60K

3000K | CRI >90 | 720lm

	CODE
	734464W5
	734464D5
	734464A5
	734464B5

1.0 PAR16

PAR16 max. 5W | GU10
100-240VAC | 50-60Hz
aluminium

IP65

	CODE
	734220W0
	734220D0
	734220A0
	734220Q0
	734220B0

OPTIONAL

PAR16 3.7W | GU10

	CODE
2700K | 350lm	905227S2
3000K | 350lm	905227S4

811

back




PRIVATE RESIDENCE FRANCE

BOX


Outdoor
Ceiling surface

235
335
607
815



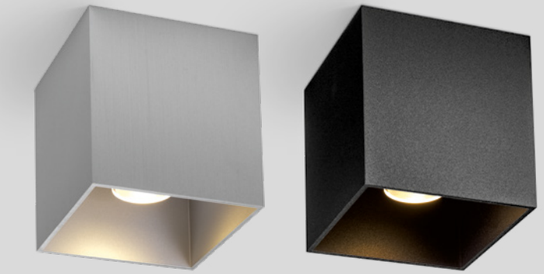









1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 M-21° L70|50K

OPTIONAL

inner reflector

	CODE
	911211W1
	911211D1
	911211Q1
	911211B1

inner cover

	CODE
	911011W1
	911011D1
	911011Q1
	911011B1

	CODE
	735258W_
	735258D_
	735258A_
	735258Q_
	735258B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	600 | >90	3
3000K	620 | >90	5
2000-3000K	415 | >90	9

back




PRIVATE RESIDENCE | PETER RANEBURGER AUSTRIA


BLAS

Outdoor
Ceiling surface













827

1.0

LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | clear and frosted glass

IP65 L80|50K

3000K | CRI >90 | 950lm

	CODE
	736387W5
	736387A5
	736387Q5
	736387B5

2.0

LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | clear and frosted glass

IP65 L80|50K

3000K | CRI >90 | 950lm

	CODE
	736487W5
	736487A5
	736487Q5
	736487B5



back



PRIVATE RESIDENCE BELGIUM

ROB

Outdoor
Ceiling surface

301





ø160



ø256



ø345

1.6

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA cover

IP44 SDCM3 L80|60K 0.70kg

	CODE
	701188W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1170	>90	3
3000K	1220	>90	5

2.6

LED PCB 18W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA cover

IP44 SDCM3 L80|60K 1.20kg

	CODE
	701288W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1800	>90	3
3000K	1810	>90	5

3.5

LED PCB 32W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA cover

IP44 SDCM3 L80|60K 1.90kg

	CODE
	701388W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	3340	>90	3
3000K	3360	>90	5

back



ROSS


Outdoor
Ceiling surface

307














1.0

LED PCB 9/11/15W
220-240VAC | 50-60Hz | incl. driver
polycarbonate housing
output and light colour selectable via dip switch

IP54 L80|50K

3000K/4000K/6000K | CRI >90
960lm/1170lm/1630lm

CODE
715184W9

2.0

LED PCB 10/15/20W
220-240VAC | 50-60Hz | incl. driver
polycarbonate housing
output and light colour selectable via dip switch

IP54 L80|50K

3000K/4000K/6000K | CRI >90
1270lm/1810lm/2360lm

CODE
715284W9

3.0

LED PCB 28/33/37W
220-240VAC | 50-60Hz | incl. driver
polycarbonate housing
output and light colour selectable via dip switch

IP54 L80|50K

3000K/4000K/6000K | CRI >90
4350lm/5000lm/5570lm

CODE
715384W9

back



TRADORA
CEILING SUSPENDED
page 777

TRADORA
CEILING SURFACE
page 775

TRADORA
WALL SURFACE
page 823

CLASCO
WALL SURFACE
page 791

classic

collection

OH, HOW ROMANTIC

Anyone who's been to Belgium knows the charming farmhouses with wooden shutters you'd love to move into right away. Their playful historic style creates a warm, inviting atmosphere – from handmade furniture to traditional lighting, now also featured in the new CLASSIC COLLECTION.

Wer Belgien besucht hat, kennt die romantischen Landhäuser mit hölzernen Fensterläden, in die man am liebsten sofort einziehen würde. Ihr verspielter historischer Stil macht sie so warm und einladend – mit Elementen von handgefertigten Möbeln bis zu den traditionellen Leuchten der neuen CLASSIC COLLECTION.

weverducre.com/classic-collection



TRADORA

Outdoor
Ceiling surface





1.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | handblown opal glass

IP65 L80|50K

2700K | CRI >90 | 350lm

	CODE
	760284CL3
	760284CQ3
	760284B3

back

777


823



TRADORA

Outdoor
Ceiling suspended





1.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | handblown opal glass

IP65 L80|50K

2700K | CRI >90 | 350lm

	CODE
	760384CL3
	760384CQ3
	760384B3





back

Wall recessed

778 – 787

GUIDE LIGHTS



RETO 0.8
781



RETO 1.3
781



RETO 2.0
783



ORIS 0.7
785




ORIS 2.0
785



ORIS 0.8
787




ORIS 1.3
787

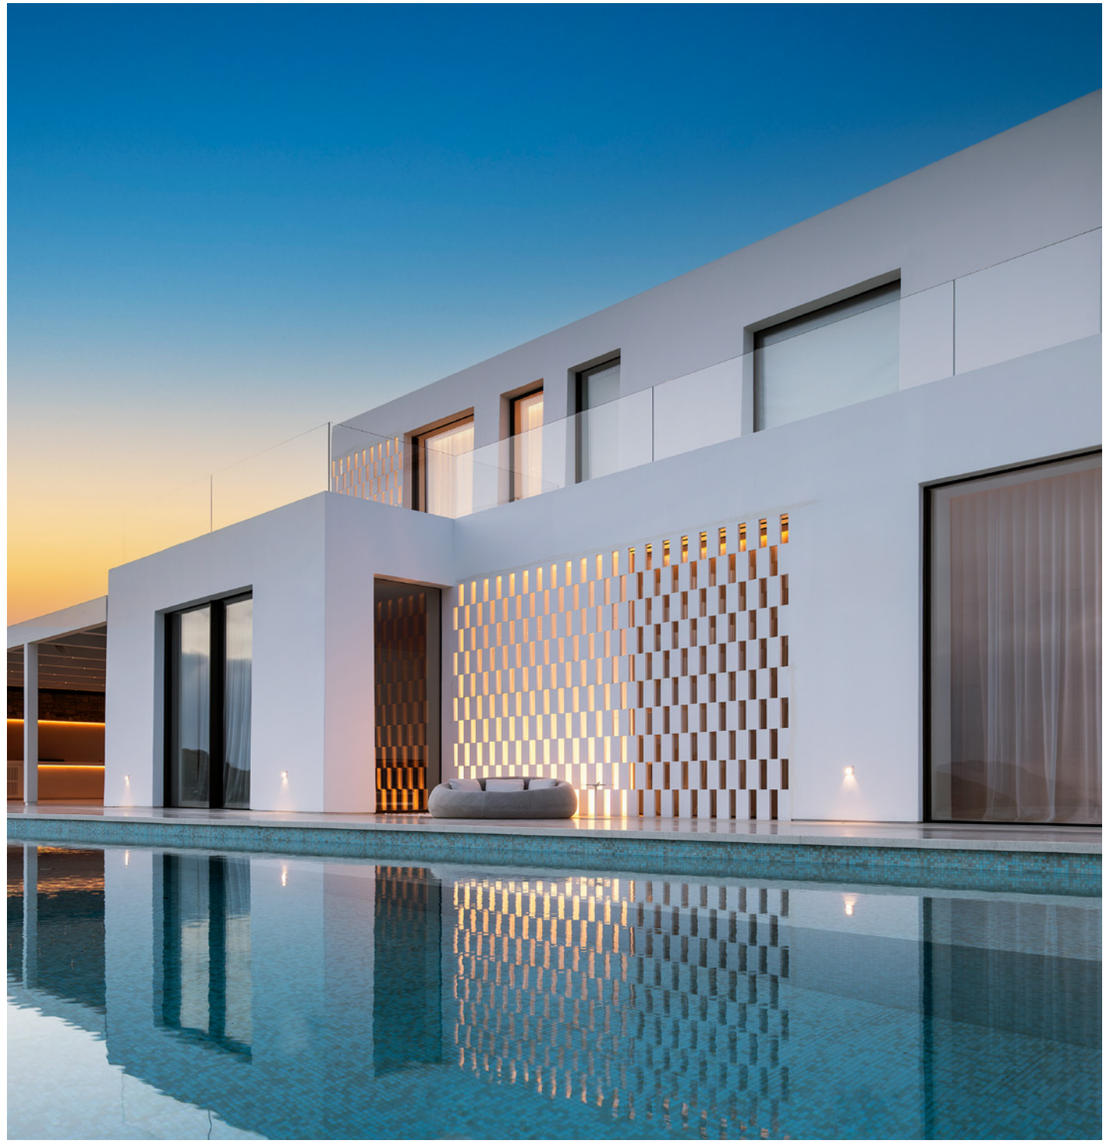


PRIVATE RESIDENCE GREECE

RETO

Outdoor
Wall recessed





0.8

LED PCB 3W | const. volt. | 24V
aluminium

IP65 L80|50K

66x66 40 min. 12

3000K | CRI >90 | 75lm

	CODE
	7451A2A5
	7451A2Q5
	7451A2B5

ALWAYS USE

driver | IP67

	CODE
24V | 35W	90212802
24V | 100W	90212903

specs on page 901

OPTIONAL

recessed housing incl. plasterkit*

	CODE
	90012047

concrete housing*

	CODE
	90012046

*driver to be placed externally

1.3

LED PCB 5W | const. volt. | 24V
aluminium

IP65 L80|50K

115x117 40 min. 12

3000K | CRI >90 | 170lm

	CODE
	7452A2A5
	7452A2Q5
	7452A2B5

ALWAYS USE

driver | IP67

	CODE
24V | 35W	90212802
24V | 100W	90212903

specs on page 901

OPTIONAL

recessed housing incl. plasterkit*


	CODE
	90012041

concrete housing*

	CODE
	90012040

*driver to be placed externally


573
835
back

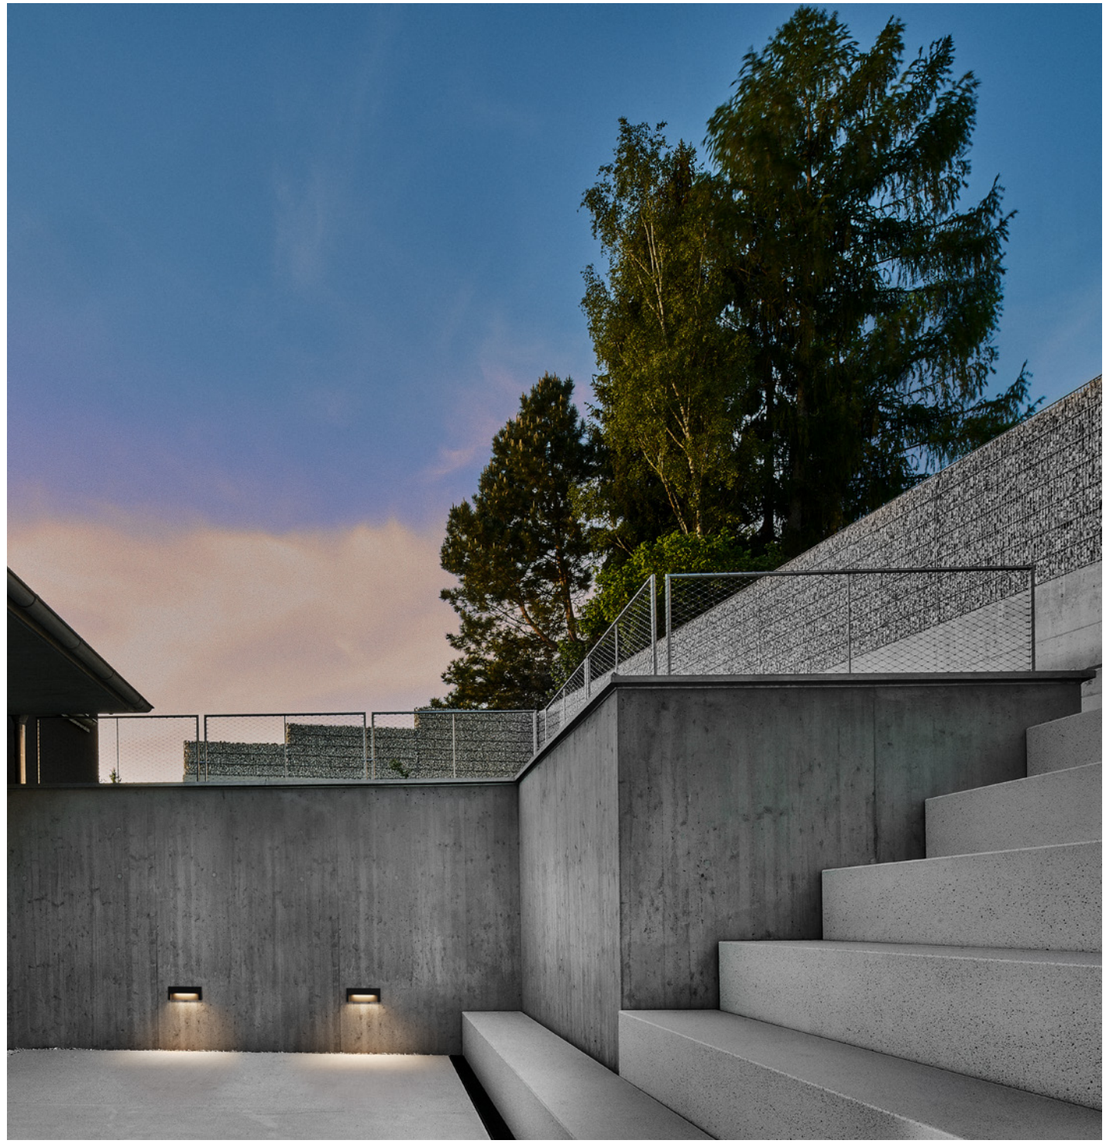


PRIVATE RESIDENCE AUSTRIA

RETO

Outdoor
Wall recessed



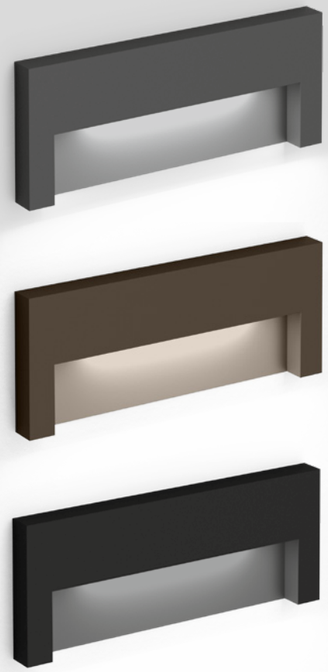

2.0

LED PCB 7W | const. volt. | 24V
aluminium

IP65 L80|50K

47x182 L40 min. 12

3000K | CRI >90 | 330lm

	CODE
	7453A2A5
	7453A2Q5
	7453A2B5

ALWAYS USE

driver | IP67

	CODE
24V | 35W	90212802
24V | 100W	90212903

specs on page 901

OPTIONAL

recessed housing incl. plasterkit*

	CODE
	90012039

concrete housing*

	CODE
	90012044

*driver to be placed externally

573

835


back




PRIVATE RESIDENCE | SPADO ARCHITECTS AUSTRIA

ORIS

Outdoor
Wall recessed

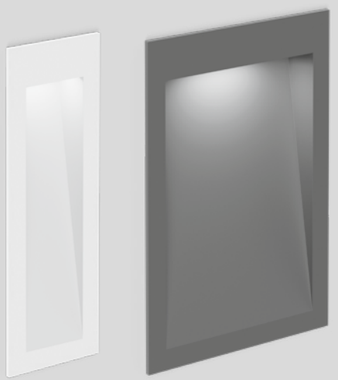



0.7

LED PCB 2/5W| 350/700mA | 6V
aluminium

IP65 L70|60K

47x182 40 min. 12

3000K | CRI >90 | 70/120lm

	CODE
	7091A1W5
	7091A1D5
	7091A1B5

ALWAYS USE

driver | IP66

	CODE
3W | 350mA	90213101
7W | 500mA	90214301
7W | 700mA	90215301

more options and specs on page 897


OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012039

concrete housing

	CODE
	90012044



2.0

LED PCB 4/7W | 350/700mA | 9V
aluminium

IP65 L70|60K

115x185 40 min. 12

3000K | CRI >90 | 140/225lm

	CODE
	7097A1W5
	7097A1D5
	7097A1B5

ALWAYS USE

driver | IP66

	CODE
3W | 350mA	90213101
7W | 500mA	90214301
7W | 700mA	90215301

more options and specs on page 897

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012043

concrete housing

	CODE
	90012042


main
581
main
back




PRIVATE RESIDENCE ARTIO STUDIO/MARTA DE LOZOYA SPAIN

ORIS

Outdoor
Wall recessed





0.8

LED PCB 2/5W | 350/700mA | 6V
aluminium

IP65 L70|60K

66x66 40 min. 12

3000K | CRI >90 | 90/150lm

	CODE
	7094A1W5
	7094A1A5
	7094A1Q5
	7094A1B5

1.3


LED PCB 4/7W | 350/700mA | 9V
aluminium

IP65 L70|60K

115x117 40 min. 12

3000K | CRI >90 | 145/220lm

	CODE
	7096A1W5
	7096A1D5
	7096A1A5
	7096A1Q5
	7096A1B5

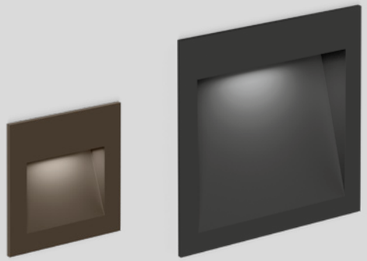

ALWAYS USE

driver | IP66

	CODE
3W | 350mA	90213101
7W | 500mA	90214301
7W | 700mA	90215301

more options and specs on page 897

ALWAYS USE

driver | IP66

	CODE
3W | 350mA	90213101
7W | 500mA	90214301
7W | 700mA	90215301

more options and specs on page 897

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012047

concrete housing

	CODE
	90012046

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012041

concrete housing

	CODE
	90012040

back

581

Wall surface

LUMINAIRES



CLASCO
791



KIOSK
793



TRAM
797



TUBE 1.0
799



TUBE 2.0
801



TAIO
803



RAY 1.0 | 2.0
805



RAY 4.0
805



TRAIN
807



CENTRAL
809



TUBE CARRÉ 1.0
811



TUBE CARRÉ 2.0
813



BOX 1.0 | 2.0
815



BOX 4.0
815



TAPE
817



PALOS 1.0
819



PALOS 2.0
819

PALOS 3.0
819



SWAM
821



TRADORA
823



RIBELLE
825



BLAS 1.0
827



BLAS 2.0
827

SPOT LIGHTS



X-BEAM
829



X-BEAM ROUND
829

GUIDE LIGHTS



PAVIO
831



RETO ROUND
833



RETO
835

back



CLASCO

Outdoor
Wall surface





1.0

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 W-105° L80|50K

	CODE
	759174CL_
	759174A_
	759174AB_
	759174CQ_
	759174Q_
	759174B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	505	>90	3
3000K	520	>90	5


back


KIOSK

Outdoor
Wall surface









1.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|50K

	CODE
	707174W_
	707174A_
	707174Q_
	707174B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x480	>90	3
3000K	2x500	>90	5

2.0

LED PCB 22W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|100K

	CODE
	707574W_
	707574A_
	707574Q_
	707574B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x960	>90	3
3000K	2x1000	>90	5

back

857









PRIVATE RESIDENCE AUSTRIA

TRAM

Outdoor
Wall surface

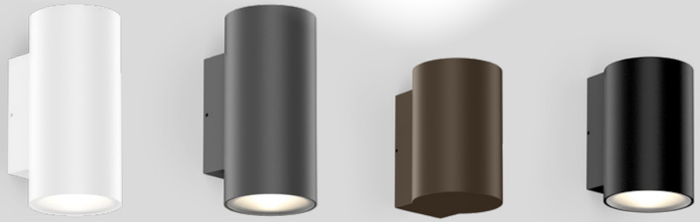







1.0

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 M-36° L70|55K

3000K | CRI >90 | 555lm

	CODE
	747568W5
	747568A5
	747568Q5
	747568B5

2.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 M-36° L70|55K

3000K | CRI >90 | 2x360lm

	CODE
	747668W5
	747668A5
	747668Q5
	747668B5


back




HOTEL VALAMAR GIRANDELLA & TUI RESORT | STUDIO 92 RABAC | CROATIA

TUBE

Outdoor
Wall surface

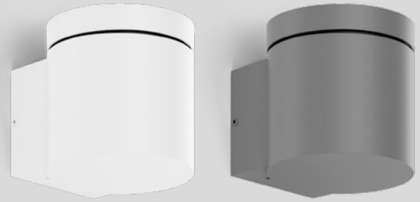






1.0 LED

LED COB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 M-36° L80|60K

3000K | CRI >90 | 635lm

	CODE
	711364W5
	711364D5
	711364A5
	711364B5



1.0 PAR16

PAR16 max. 5W | GU10
220-240VAC | 50-60Hz
aluminium

IP65

	CODE
	711120W0
	711120D0
	711120A0
	711120Q0
	711120B0

OPTIONAL

PAR16 3.7W | GU10

	CODE
2700K | 350lm	905227S2
3000K | 350lm	905227S4

755

back



PRIVATE RESIDENCE | BUITENHUIS TUINONDERNEMINGEN BELGIUM

TUBE

Outdoor
Wall surface







2.0 LED

LED COB 21W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 M-36° L80|60K

3000K | CRI >90 | 2x635lm

	CODE
	711464W5
	711464D5
	711464A5
	711464B5

2.0 PAR16

2x PAR16 max. 5W | GU10
220-240VAC | 50-60Hz
aluminium

IP65


	CODE
	711220W0
	711220D0
	711220A0
	711220Q0
	711220B0

OPTIONAL

PAR16 3.7W | GU10

	CODE
2700K | 350lm	905227S2
3000K | 350lm	905227S4













back





PRIVATE RESIDENCE | GC ARCHITECTEN BELGIUM


TAIO

Outdoor
Wall surface











1.0

LED COB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | protector glass
opal glass convex lens

IP65 W-105° L80|55K

	CODE
	180584W_
	180584A_
	180584Q_
	180584B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	435	>90	3
3000K	490	>90	5

2.0

LED COB 21W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | protector glass
opal glass convex lens

IP65 W-105° L80|55K

	CODE
	180684W_
	180684A_
	180684Q_
	180684B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x435	>90	3
3000K	2x490	>90	5

165
299
747
757
back



PIARISTENGASSE 23 | © **LIV.AT** VIENNA | AUSTRIA

RAY

Outdoor
Wall surface







251



341 | 377 | 393



537



615



759




100

ø150



100

ø150



160

ø150

1.0

LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 L80|55K

	CODE
	749168W_
	749168B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	350	>90	3
3000K	370	>90	5

2.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 L80|55K

	CODE
	749148W_
	749148B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x440	>90	3
3000K	2x460	>90	5

4.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 L80|55K

	CODE
	749248W_
	749248B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x325	>90	3
3000K	2x345	>90	5

LOXONE VERSIONS ONLINE
weverducre.com/more-ray-wall


back




GALLOP EXTENSION AT SINGAPORE BOTANIC GARDENS | KAY NGEE TAN ARCHITECTS SINGAPORE


TRAIN

Outdoor
Wall surface

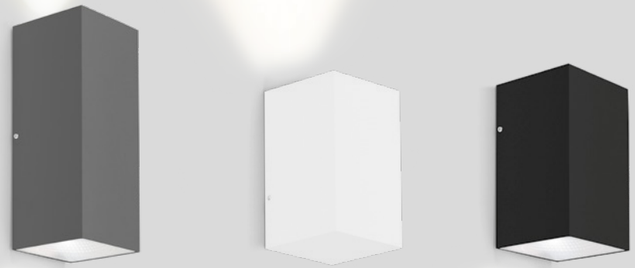









1.0 NARROW

LED PCB 6W
220-240VAC | 50-60Hz | incl. driver
aluminium
narrow up or narrow down lens

IP65 W-55°x5° L80|60K

3000K | CRI >80 | 170lm

CODE
718143B4

1.0

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 M-38° L70|55K

3000K | CRI >90 | 530lm

CODE
718868W5
718868A5
718868B5

2.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 M-38° L70|55K

3000K | CRI >90 | 2x375lm

CODE
718968W5
718968A5
718968B5

back



PRIVATE RESIDENCE | OLSTE & HOPROM BELGIUM

CENTRAL

Outdoor
Wall surface







1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|60K

3000K | CRI >90 | 620lm

	CODE
	313774W5
	313774A5
	313774Q5
	313774B5

2.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|60K

3000K | CRI >90 | 2x330lm

	CODE
	313874W5
	313874A5
	313874Q5
	313874B5

back


617




PRIVATE RESIDENCE | TRANSFORM ARCHITECTUUR BELGIUM


TUBE CARRÉ

Outdoor
Wall surface









1.0 LED

LED COB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 M-32° L80|60K

3000K | CRI >90 | 715lm

	CODE
	744364W5
	744364D5
	744364A5
	744364B5

1.0 PAR16

PAR16 max. 5W | GU10
220-240VAC | 50-60Hz
aluminium

IP65

	CODE
	744120W0
	744120D0
	744120A0
	744120Q0
	744120B0

OPTIONAL

PAR16 3.7W | GU10

	CODE
2700K | 350lm	905227S2
3000K | 350lm	905227S4

763

STEP

back





PRIVATE RESIDENCE | MAA ARCHITECTURE STUDIO & ZPLUS ARCHITECTURE BELGIUM

TUBE CARRÉ

Outdoor
Wall surface







2.0 LED

LED COB 20W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 M-36° L80|60K

3000K | CRI >90 | 2x745lm

	CODE
	744464W5
	744464D5
	744464A5
	744464B5

2.0 PAR16

2x PAR16 max. 5W | GU10
220-240VAC | 50-60Hz
aluminium


IP65

	CODE
	744220W0
	744220D0
	744220A0
	744220Q0
	744220B0

OPTIONAL

PAR16 3.7W | GU10

	CODE
2700K | 350lm	905227S2
3000K | 350lm	905227S4

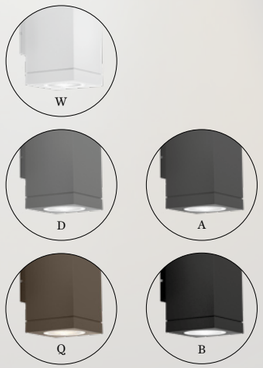

763

back





PRIVATE RESIDENCE | RARDO ARCHITECTS SPAIN


BOX


Outdoor
Wall surface
























MORE VERSIONS + LOXONE ONLINE
weverducre.com/more-box-wall

1.0

LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 L80|55K

	CODE
	748168W_
	748168D_
	748168A_
	748168Q_
	748168B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	350	>90	3
3000K	370	>90	5

2.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 L80|55K

	CODE
	748148W_
	748148D_
	748148A_
	748148Q_
	748148B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x440	>90	3
3000K	2x460	>90	5

4.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz
aluminium


IP65 L80|55K

	CODE
	748248W_
	748248D_
	748248Q_
	748248B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x325	>90	3
3000K	2x345	>90	5

235
335
607
765
back

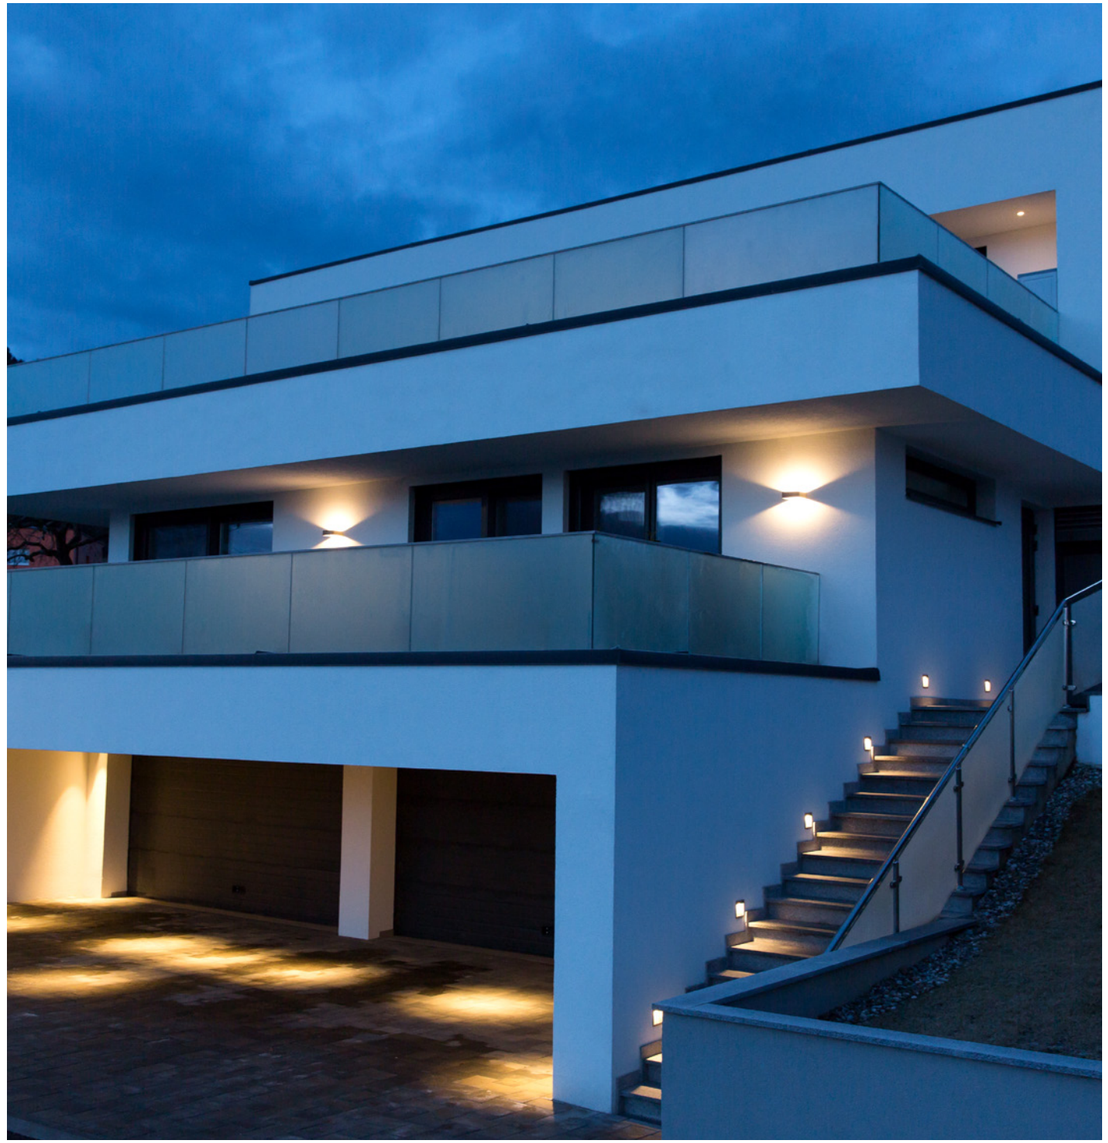


PRIVATE RESIDENCE AUSTRIA

TAPE

Outdoor
Wall surface






1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|60K

3000K | CRI >90 | 425lm



back


	CODE
	722174W5
	722174D5
	722174A5
	722174B5




PRIVATE RESIDENCE | BAUBUREAU OG 27 SWITZERLAND

PALOS

Outdoor
Wall surface

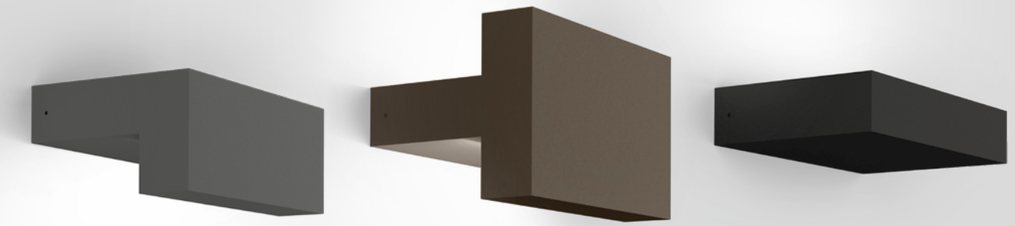




1.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|60K

	CODE
	4161A4A_
	4161A4Q_
	4161A4B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	680	>80	2
3000K	700	>80	4




2.0

LED PCB 21W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|60K

	CODE
	4162A4A_
	4162A4Q_
	4162A4B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x600	>80	2
3000K	2x620	>80	4



3.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|60K

	CODE
	4163A4A_
	4163A4Q_
	4163A4B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	745	>80	2
3000K	770	>80	4

info

877

back





PRIVATE RESIDENCE | ELLEMVIE - ART & INTERIEUR THE NETHERLANDS

SWAM

Outdoor
Wall surface













1.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 L80|60K

2700K | CRI >90 | 410lm

	CODE
	746278Q3
	746278K3
	746278B3

2.0

LED PCB 14W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 L80|60K

2700K | CRI >90 | 670lm

	CODE
	746378Q3
	746378K3
	746378B3

info


859

back

TRADORA

Outdoor
Wall surface





1.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | handblown opal glass

IP65 L80|50K

2700K | CRI >90 | 350lm


	CODE
	760184CL3
	760184CQ3
	760184B3

775
777
back

RIBELLE

Outdoor
Wall surface





1.0


LED PCB 5W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | ribbed glass

IP65 L80|100K

	CODE
	772184A_
	772184Q_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	415	>90	3
3000K	425	>90	5

709
867
back

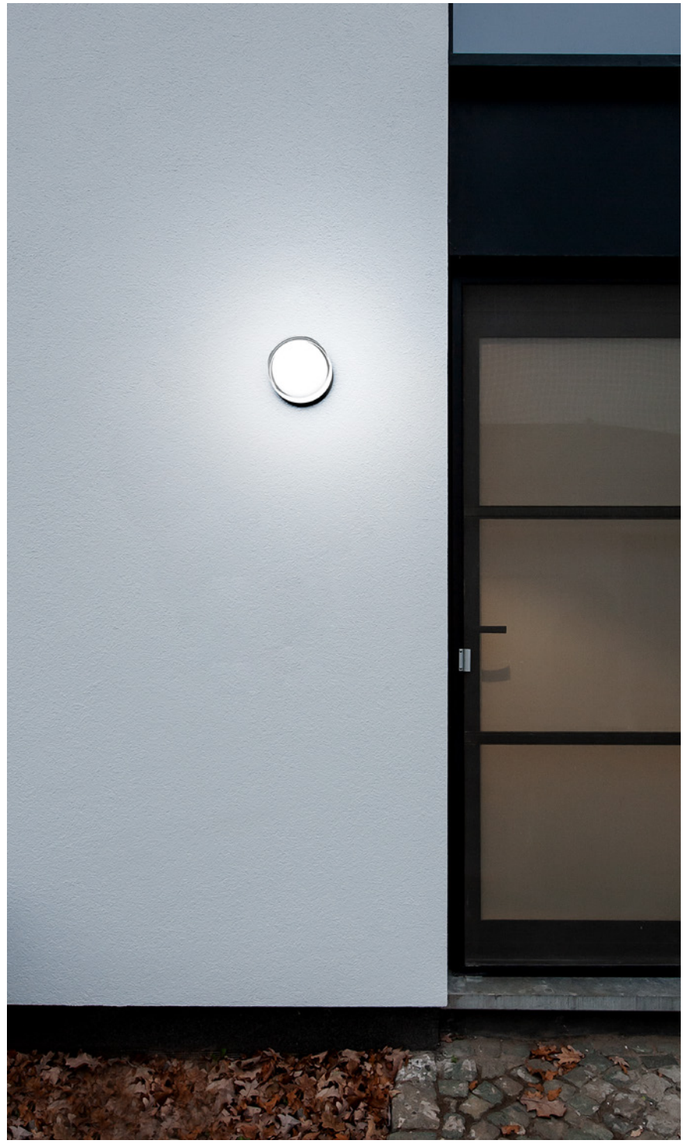

PRIVATE RESIDENCE BELGIUM


BLAS

Outdoor
Wall surface











1.0

LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz
aluminium
clear and frosted glass

IP65 L80|50K

3000K | CRI >90 | 950lm

	CODE
	736387W5
	736387B5

2.0

LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz
aluminium
clear and frosted glass

IP65 L80|50K


3000K | CRI >90 | 950lm

	CODE
	736487W5
	736487B5



back







SHOWROOM CHILLOUT AREA GRAZ | AUSTRIA

X-BEAM


Outdoor
Wall surface











OPTIONAL


snoot

	CODE
	90019023

snoot round

	CODE
	90019031

specs on page 911



1.0

LED PCB 24W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 0-110° W-108° L80|60K

3000K | CRI >80 | 1590lm

	CODE
	700374D4
	700374A4
	700374B4

1.0 ROUND

LED PCB 24W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 0-110° W-108° L80|60K


3000K | CRI >80 | 1520lm

	CODE
	700474A4
	700474Q4
	700474B4

back

PAVIO

Outdoor
Wall surface





1.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|100K

3000K | CRI >90 | 525lm

	CODE
	351184W5
	351184Q5
	351184B5


back



PRIVATE RESIDENCE SPAIN

RETO ROUND

Outdoor
Wall surface

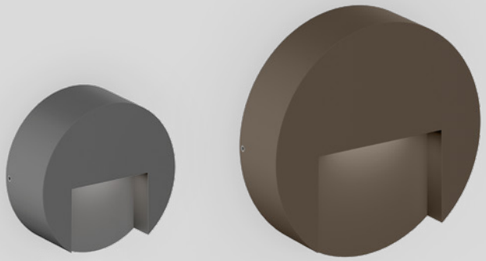





0.8

LED PCB 4W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|100K

3000K | CRI >90 | 105lm

	CODE
	7457A4A5
	7457A4Q5
	7457A4B5

1.3

LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|100K

3000K | CRI >90 | 160lm

	CODE
	7458A4A5
	7458A4Q5
	7458A4B5


back




PRIVATE RESIDENCE | RARDO ARCHITECTS SPAIN


RETO

Outdoor
Wall surface

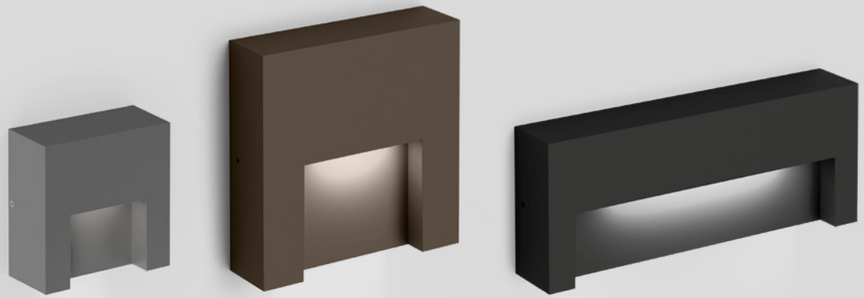







0.8

LED PCB 4W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|100K

3000K | CRI >90 | 105lm

	CODE
	7454A4A5
	7454A4Q5
	7454A4B5

1.3

LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|50K

3000K | CRI >90 | 160lm

	CODE
	7455A4A5
	7455A4Q5
	7455A4B5

2.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|50K

3000K | CRI >90 | 335lm

	CODE
	7456A4A5
	7456A4Q5
	7456A4B5

back

573
781
IP65

Floor recessed

836 – 853

RECESSED



BLINK TRIMLESS
839



BLINK
839



CARD 0.1
843



CARD 0.2
843



MAP
845



MAP ASYM
849

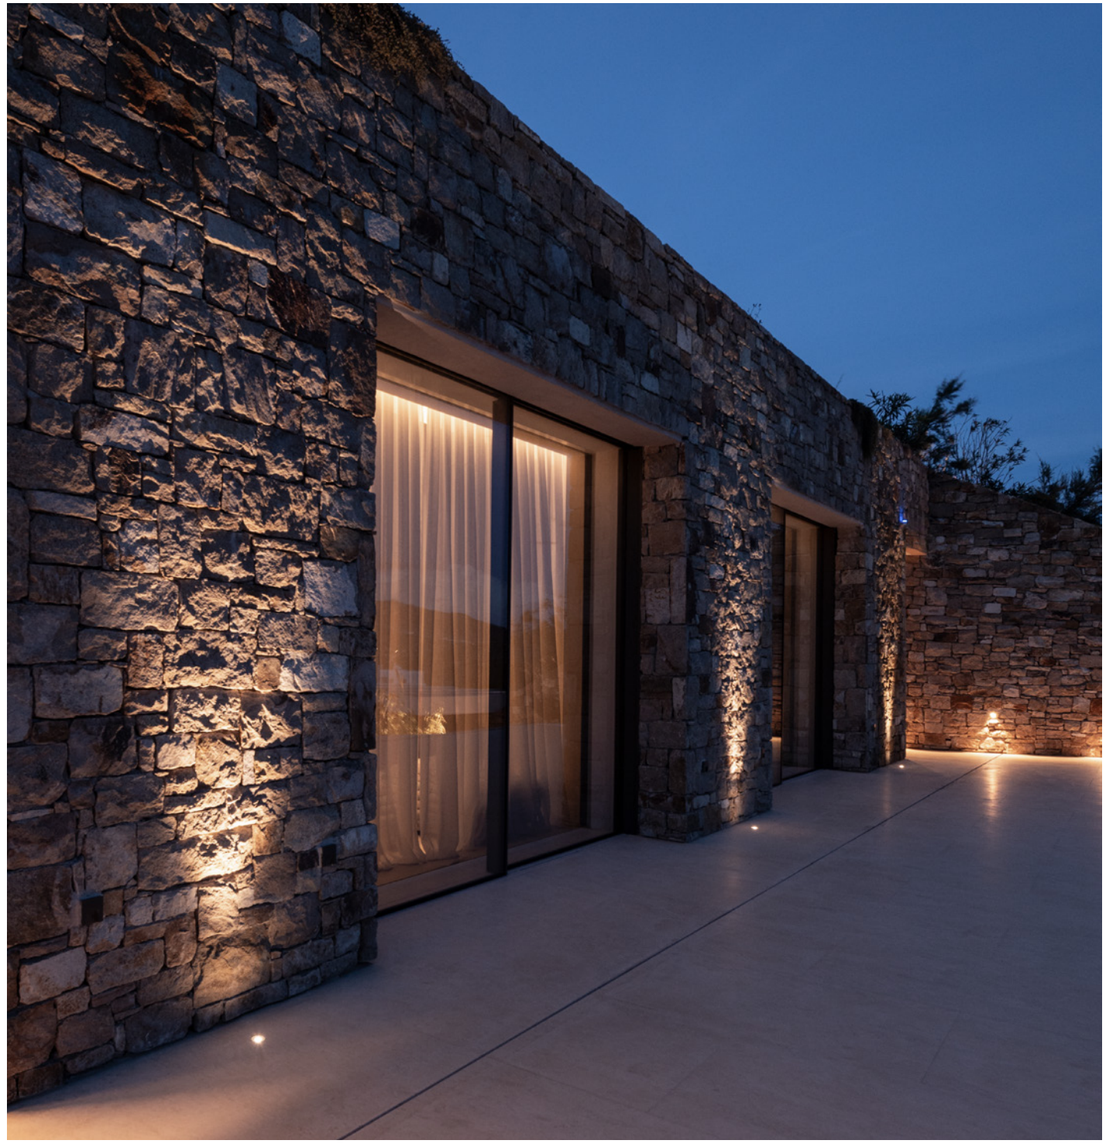


CHART
851



CHART ASYM
853

back



PRIVATE RESIDENCE GREECE

BLINK

Outdoor
trimless / Floor recessed





1.0 TRIMLESS

LED COB 6W | 500mA | 9V
aluminium | glass

IP65 IK08 M-30° L80|50K

3000K | CRI >90 | 410lm

	CODE
	721261B5

ALWAYS USE

driver | 500mA

	CODE
7W dim	90224301
7W IP67	90214301

more options and specs on page 898

ALWAYS USE

recessed ground housing | polyamide

137 110



	CODE
	90012201



1.0

LED COB 6W | 500mA | 9V
aluminium | glass

IP65 IK08 M-30° L80|50K

47-49

3000K | CRI >90 | 410lm

	CODE
	721161B5

ALWAYS USE

driver | 500mA

	CODE
7W dim	90224301
7W IP67	90214301

more options and specs on page 898

OPTIONAL

recessed ground housing | polyamide

137 110



	CODE
	90012201

back



BLINK

Outdoor
trimless / Floor recessed



2.0 TRIMLESS

LED COB 11W | 500mA | 20V
aluminium | glass

IP65 IK08 M-38° L80|50K

3000K | CRI >90 | 700lm

	CODE
	721461B5

ALWAYS USE

driver | 500mA

	CODE
20W dim	90224602
24W IP68	90214702

more options and specs on page 898


ALWAYS USE

recessed ground housing | polyamide

137 130



	CODE
	90012202



2.0

LED COB 11W | 500mA | 20V
aluminium | glass

IP65 IK08 M-38° L80|50K

84-86

3000K | CRI >90 | 700lm

	CODE
	721361B5

ALWAYS USE

driver | 500mA


	CODE
20W dim	90224602
24W IP68	90214702

more options and specs on page 898

OPTIONAL

recessed ground housing | polyamide

137 130



	CODE
	90012202




back



DIJLEPAD MECHELEN | BELGIUM

CARD

Outdoor
Floor recessed



0.1

LED PCB 2W | 350mA | 3V
aluminium | stainless steel | glass

IP67 IK07 N-16° L70|60K

22-24 60

3000K | CRI >80 | 90lm

	CODE
	750141I4

0.2

LED PCB 2W | 350mA | 3V
aluminium | stainless steel | glass

IP67 IK07 N-16° L70|60K

22-24 60

3000K | CRI >80 | 90lm

	CODE
	750241I4

ALWAYS USE

driver | IP66

	CODE
3W | 350mA	90213101

more options and specs on page 897

ALWAYS USE

driver | IP66

	CODE
3W | 350mA	90213101

more options and specs on page 897





back



PRIVATE RESIDENCE | RARDO ARCHITECTS SPAIN

MAP

Outdoor
Floor recessed





0.6

LED COB 5W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass

IP67 IK08 W-43° L70|55K

100

3000K | CRI >90 | 310lm

CODE
751168I5

OPTIONAL

recessed ground housing | polyamide

137 110



CODE
90012201



0.9

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass

IP67 IK08 M-35° L70|55K

135

3000K | CRI >90 | 685lm

CODE
751268I5

OPTIONAL

recessed ground housing | polyamide

137 130



CODE
90012202

back




TOPSPORTSCHOOL | UAU COLLECTIV HASSELT | BELGIUM

MAP

Outdoor
Floor recessed





1.2

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass

IP67 IK08 W-44° L70|55K

120


3000K | CRI >90 | 995lm

CODE
751368I5


OPTIONAL

recessed ground housing | polyamide

190 158



CODE
90012203



1.6

LED COB 17W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass

IP67 IK09 M-38° L70|55K

185


3000K | CRI >90 | 1260lm

CODE
75146815

OPTIONAL

recessed ground housing | polyamide

220 184



CODE
90012204

back




PRIVATE RESIDENCE OBUMEX – STEENOVEN BELGIUM

MAP ASYM

Outdoor
Floor recessed





1.2

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass
asymmetric reflector

IP67 IK08 L70|55K

160


3000K | CRI >90 | 565lm

CODE
7515A8I5

OPTIONAL

recessed ground housing | polyamide

190 158



CODE
90012203



1.6

LED COB 16W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass
asymmetric reflector

IP67 IK09 L70|55K

185


3000K | CRI >90 | 845lm

CODE
7516A8I5

OPTIONAL

recessed ground housing | polyamide

220 184



CODE
90012204

back





PRIVATE RESIDENCE FRANCE

CHART

Outdoor
Floor recessed



0.6

LED COB 5W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass

IP67 IK08 W-43° L70|55K

L118

3000K | CRI >90 | 310lm

CODE
752168I5


OPTIONAL

recessed ground housing | polyamide

Ø137 L110



CODE
90012201



0.9

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass

IP67 IK08 M-35° L70|55K

L135

3000K | CRI >90 | 640lm

CODE
752268I5


OPTIONAL

recessed ground housing | polyamide

Ø137 L130



CODE
90012202



1.2

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass

IP67 IK08 W-44° L70|55K

L175


3000K | CRI >90 | 995lm

CODE
752368I5


OPTIONAL

recessed ground housing | polyamide

Ø190 L158



CODE
90012203



1.6

LED COB 17W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass

IP67 IK09 M-38° L70|55K

L185


3000K | CRI >90 | 1260lm

CODE
752468I5

OPTIONAL

recessed ground housing | polyamide

Ø220 L184




CODE
90012204

back

CHART ASYM

Outdoor
Floor recessed



1.2

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass
asymmetric reflector

IP67 IK08 L70|55K

160


3000K | CRI >90 | 565lm

CODE
7525A8I5


OPTIONAL

recessed ground housing | polyamide

190 158



CODE
90012203



1.6

LED COB 16W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass
asymmetric reflector

IP67 IK09 L70|55K

185


3000K | CRI >90 | 845lm

CODE
7526A8I5

OPTIONAL

recessed ground housing | polyamide

220 184



CODE
90012204



back

Floor surface

854 - 891

LUMINAIRES

KIOSK 1.1
857

KIOSK 1.2
857

KIOSK 1.3
857



SWAM
859



SWAM
859

PROJECTORS



STIPO 1.0
863



STIPO 4.0
863



X-BEAM
865



X-BEAM ROUND
865

BOLLARDS

RIBELLE
867

GATE ROUND 1.0
869

GATE ROUND 2.0
869

GATE CARRÉ 1.0
871

GATE CARRÉ 2.0
871



PALOS ROUND
873



PALOS CARRÉ
877

LINUS
881

PLUG & PLAY

GEO 1.0
885

GEO 2.0
885


REED 1.0
887

REED 2.0
887

POLA 2.0
889


POLA 2.1
889



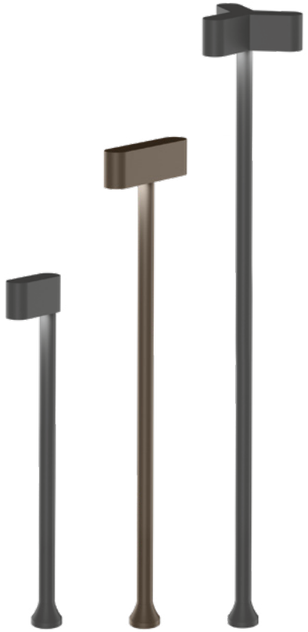

KIOSK

Outdoor
Floor surface



1.1

LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|50K

3000K | CRI >90 | 395lm

	CODE
	7072A4A5
	7072A4Q5

ALWAYS USE

pole | incl. ground spike

	CODE
400	910101_0
600	910102_0
800	910103_0


	CODE
	A
	Q

order fixation separately

OPTIONAL

ground fixation plate

	CODE
	90019019



1.2

LED PCB 13W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|50K

3000K | CRI >90 | 2x380lm

	CODE
	7073A4A5
	7073A4Q5

ALWAYS USE

pole | incl. ground spike

	CODE
400	910101_0
600	910102_0
800	910103_0


	CODE
	A
	Q

order fixation separately

OPTIONAL

ground fixation plate

	CODE
	90019019



1.3

LED PCB 19W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|50K

3000K | CRI >90 | 3x375lm

	CODE
	7074A4A5
	7074A4Q5

ALWAYS USE

pole | incl. ground spike

	CODE
400	910101_0
600	910102_0
800	910103_0

	CODE
	A
	Q

order fixation separately

OPTIONAL

ground fixation plate

	CODE
	90019019

793




PRIVATE RESIDENCE AUSTRIA

SWAM

Outdoor
Floor surface





1.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 L80|60K

2700K | CRI >90 | 310lm

	CODE
	746178Q3
	746178K3
	746178B3

ALWAYS USE

straight pole | incl. ground spike

	CODE
400	910090_0
600	910091_0
800	910092_0


	CODE
	B
	Q

order fixation separately

OPTIONAL

ground fixation plate

	CODE
	90019019



1.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 L80|60K

2700K | CRI >90 | 310lm

	CODE
	746178Q3
	746178K3
	746178B3

ALWAYS USE

curved pole | incl. ground spike

	CODE
400	910093_0
600	910094_0
800	910095_0

	CODE
	B
	Q

order fixation separately

OPTIONAL

ground fixation plate

	CODE
	90019019

821

back






HOTEL BRITANNIA | S-CONSULTANCY KNOKKE-HEIST | BELGIUM











STIPO

Outdoor
Floor surface









1.0

LED COB 7W | phase-cut dim
220-240VAC | 50/60Hz
aluminium

IP65 135° M-38° L70|55K

3000K | CRI >90 | 450lm

	CODE
	737168A5
	737168Q5

2.0

LED COB 7W | phase-cut dim
220-240VAC | 50/60Hz
aluminium

IP65 135° M-38° L70|55K

3000K | CRI >90 | 500lm

	CODE
	737268A5
	737268Q5

3.0

LED COB 7W | phase-cut dim
220-240VAC | 50/60Hz
aluminium

IP65 135° M-38° L70|55K

3000K | CRI >90 | 450lm

	CODE
	737368A5
	737368Q5

4.0

LED COB 7W | phase-cut dim
220-240VAC | 50/60Hz
aluminium

IP65 135° M-38° L70|55K

3000K | CRI >90 | 500lm

	CODE
	737468A5
	737468Q5

ALWAYS USE

pole

	CODE
200	910062_0
400	910064_0
600	910066_0

	CODE
	A
	Q

order spike separately

ALWAYS USE

pole

	CODE
200	910062_0
400	910064_0
600	910066_0

	CODE
	A
	Q

order spike separately

OPTIONAL

ground spike

	CODE
	90013106

OPTIONAL

ground spike

	CODE
	90013106

OPTIONAL

ground spike

	CODE
	90013106

OPTIONAL

ground spike

	CODE
	90013106



PRIVATE RESIDENCE GREECE


X-BEAM


Outdoor
Floor surface











OPTIONAL

ground spike


	CODE
	90013115

snoot

	CODE
	90019023

snoot round

	CODE
	90019031



1.0

LED COB 24W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 0-110° W-108° L80|60K

3000K | CRI >80 | 1590lm

	CODE
	700374D4
	700374A4
	700374B4

1.0 ROUND

LED PCB 24W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 0-110° W-108° L80|60K

3000K | CRI >80 | 1520lm

	CODE
	700474A4
	700474Q4
	700474B4


829

back

RIBELLE

Outdoor
Floor surface






1.0

LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | ribbed glass

IP65 L80|100K

	CODE
	772284A_
	772284Q_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	590	>90	3
3000K	610	>90	5



2.0

LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | ribbed glass

IP65 L80|100K


	CODE
	772384A_
	772384Q_


LIGHT COLOUR	LUMEN	CRI	CODE
2700K	590	>90	3
3000K	610	>90	5

709
825
back

GATE ROUND

Outdoor
Floor surface

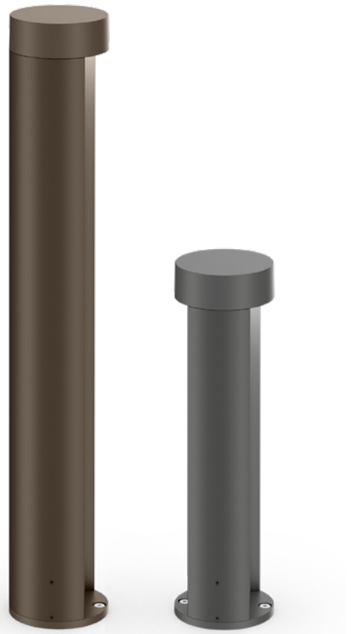



1.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | glass

IP65 L80|50K

	CODE
	7581A4A_
	7581A4Q_


LIGHT COLOUR	LUMEN	CRI	CODE
2700K	400	>80	2
3000K	420	>80	4

ALWAYS USE

pole with fixation plate

	CODE
250	910121_0
450	910122_0
650	910123_0

	CODE
	A
	Q



2.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | glass

IP65 L80|50K

	CODE
	7582A4A_
	7582A4Q_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x290	>80	2
3000K	2x305	>80	4

ALWAYS USE

pole with fixation plate


	CODE
250	910124_0
450	910125_0
650	910126_0


	CODE
	A
	Q

back

GATE CARRÉ

Outdoor
Floor surface

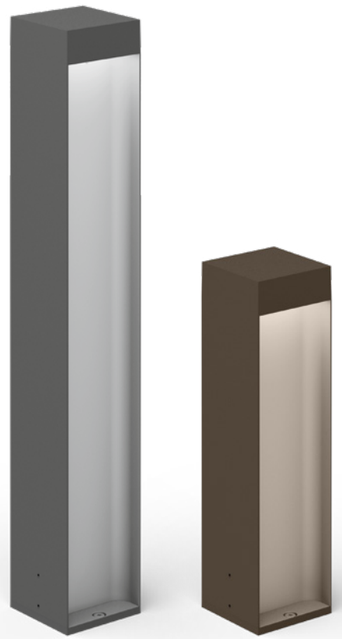



1.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | glass

IP65 L80|50K

	CODE
	7583A4A_
	7583A4Q_


LIGHT COLOUR	LUMEN	CRI	CODE
2700K	400	>80	2
3000K	420	>80	4

ALWAYS USE

pole with fixation plate

	CODE
250	910111_0
450	910112_0
650	910113_0

	CODE
	A
	Q



2.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | glass

IP65 L80|50K

	CODE
	7584A4A_
	7584A4Q_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x290	>80	2
3000K	2x305	>80	4

ALWAYS USE

pole with fixation plate

	CODE
250	910114_0
450	910115_0
650	910116_0

	CODE
	A
	Q


back




PRIVATE RESIDENCE BELGIUM

PALOS ROUND

Outdoor
Floor surface

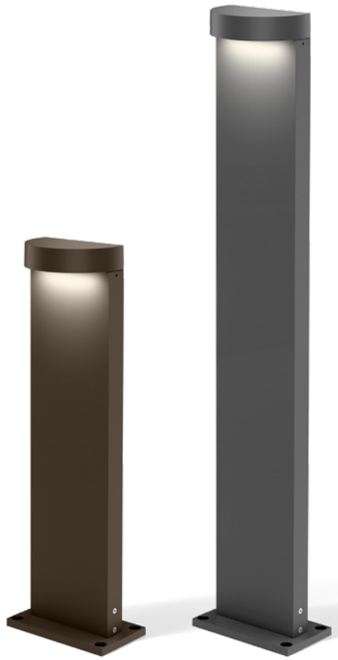



1.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|60K

	CODE
	4166A4A_
	4166A4Q_
	4166A4B_


LIGHT COLOUR	LUMEN|CRI	CODE
2700K	680|>80	2
3000K	700|>80	4

ALWAYS USE

pole with fixation plate

	CODE
170	910013_0
270	910014_0
470	910016_0
670	910018_0
870	910010_0

	CODE
	A
	Q
	B



1.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|60K

	CODE
	4166A4A_
	4166A4Q_
	4166A4B_

LIGHT COLOUR	LUMEN|CRI	CODE
2700K	680|>80	2
3000K	700|>80	4

ALWAYS USE

pole with concrete fixation


	CODE
170	910073_0
270	910074_0
470	910076_0
670	910078_0
870	910070_0


	CODE
	A
	Q
	B

back

PALOS ROUND

Outdoor
Floor surface

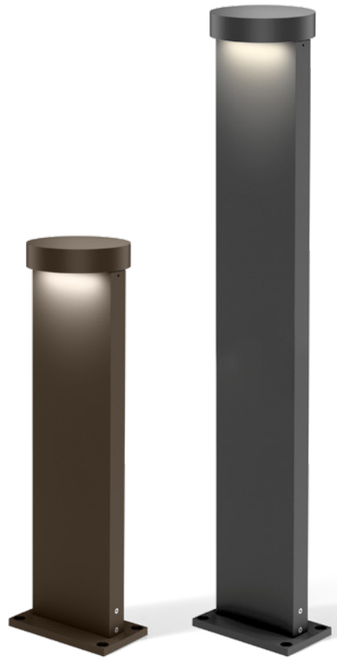



2.0

LED PCB 21W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|60K

	CODE
	4167A4A_
	4167A4Q_
	4167A4B_


LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x655	>80	2
3000K	2x675	>80	4

ALWAYS USE

pole with fixation plate

	CODE
170	910013_0
270	910014_0
470	910016_0
670	910018_0
870	910010_0

	CODE
	A
	Q
	B



2.0

LED PCB 21W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|60K

	CODE
	4167A4A_
	4167A4Q_
	4167A4B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x655	>80	2
3000K	2x675	>80	4

ALWAYS USE

pole with concrete fixation

	CODE
170	910073_0
270	910074_0
470	910076_0
670	910078_0
870	910070_0

	CODE
	A
	Q
	B


back




PRIVATE RESIDENCE | OPEN ARCHITECTES BELGIUM

PALOS CARRÉ

Outdoor
Floor surface

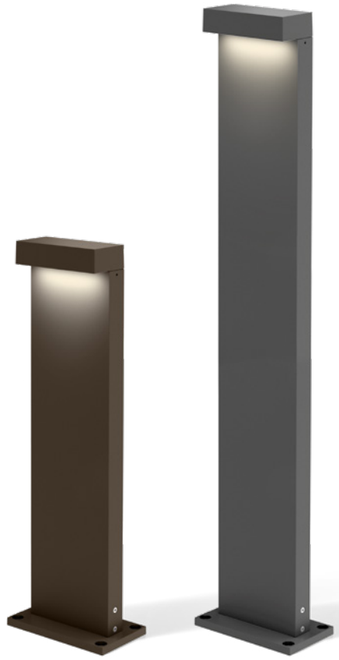



1.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|60K

	CODE
	4164A4A_
	4164A4Q_
	4164A4B_


LIGHT COLOUR	LUMEN	CRI	CODE
2700K	680	>80	2
3000K	700	>80	4

ALWAYS USE

pole with fixation plate

	CODE
170	910013_0
270	910014_0
470	910016_0
670	910018_0
870	910010_0

	CODE
	A
	Q
	B



1.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|60K g

	CODE
	4164A4A_
	4164A4Q_
	4164A4B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	680	>80	2
3000K	700	>80	4

ALWAYS USE

pole with concrete fixation

	CODE
170	910073_0
270	910074_0
470	910076_0
670	910078_0
870	910070_0

	CODE
	A
	Q
	B


819


back



PALOS CARRÉ

Outdoor
Floor surface

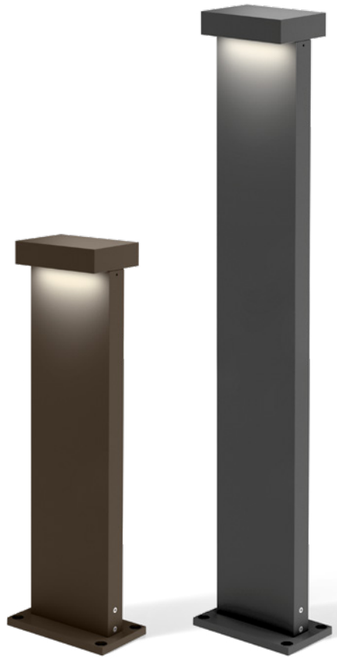



2.0

LED PCB 21W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|60K

	CODE
	4165A4A_
	4165A4Q_
	4165A4B_


LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x655	>80	2
3000K	2x675	>80	4

ALWAYS USE

pole with fixation plate

	CODE
170	910013_0
270	910014_0
470	910016_0
670	910018_0
870	910010_0

	CODE
	A
	Q
	B



2.0

LED PCB 21W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|60K

	CODE
	4165A4A_
	4165A4Q_
	4165A4B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x655	>80	2
3000K	2x675	>80	4

ALWAYS USE


pole with concrete fixation

	CODE
170	910073_0
270	910074_0
470	910076_0
670	910078_0
870	910070_0

	CODE
	A
	Q
	B

819


back

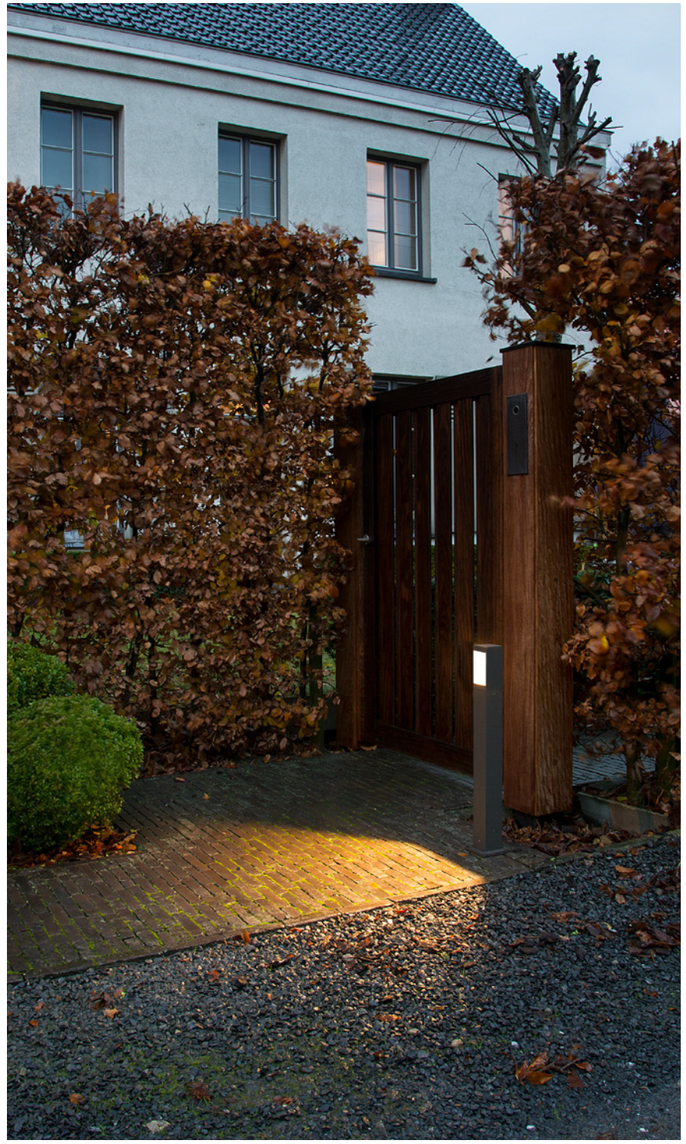


PRIVATE RESIDENCE BELGIUM

LINUS

Outdoor
Floor surface



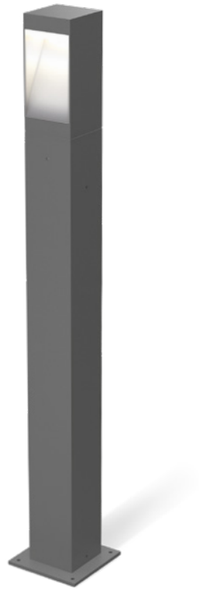

3.0

LED COB 7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 L70|50K

3000K | CRI >90 | 215lm

	CODE
	726378D5
	726378A5
	726378Q5

ALWAYS USE

pole

	CODE
150	910024_0
350	910026_0
550	910028_0

	CODE
	D
	A
	Q

OPTIONAL

ground spike

	CODE
	90013103

ground fixation

	CODE
	90013302

back

driver

ONE DRIVER IS ALL YOU NEED

They highlight facades, illuminate the garden, and keep paths visible at night – modern outdoor lights are true all-rounders. With the 24V Plug & Play Connector System, installation is easy: a socket, a suitable driver, and multiple luminaires can be connected in no time.

Sie setzen Fassaden in Szene, beleuchten den Garten und machen Wege im Dunkeln sichtbar – moderne Outdoor-Leuchten sind echte Alleskönner. Mit dem 24V Plug & Play Connector System gelingt die Installation besonders leicht: Steckdose, passender Treiber und schon lassen sich mehrere Leuchten anschließen.

weverducre.com/24V-plugplay

1 CHOOSE YOUR LUMINAIRES



GEO
page 885

REED
page 887

POLA
page 889

Two, three, four, or even more, the choice is yours! The number of lights and the sum of their individual wattages is the first thing you need to know to get started with your Plug & Play Connector System.

GOOD TO KNOW
24V Plug & Play Connector System recommends adding 2 or more luminaires to the driver.


2 DEFINE THE DISTANCE BETWEEN DRIVER AND LUMINAIRE

Adjacent or far away. The distance between the driver and the first light is very important as it determines the further options of your 24V Plug & Play Connector System lighting solution. You can find detailed information about your options at weverducre.com/24V-cable-length

GOOD TO KNOW
Each driver is supplied with two 2.5m cables, one for each side.

3 CHOOSE YOUR DRIVER AND SET UP YOUR LUMINAIRES

Accessory options on page 927

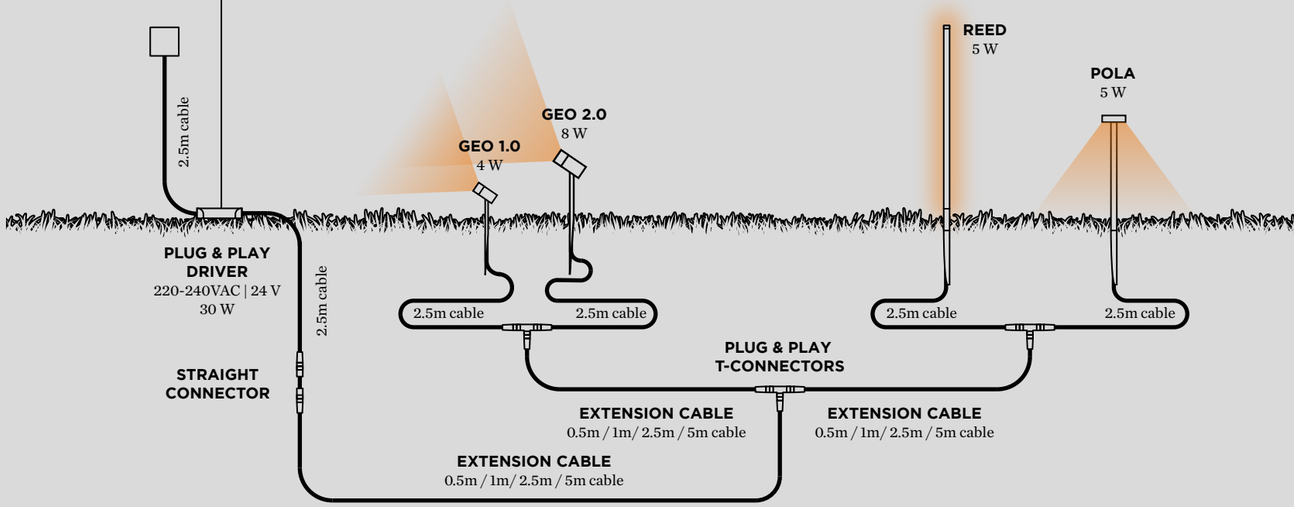


Plug & Play
24V

back



GEO

Outdoor
Floor surface

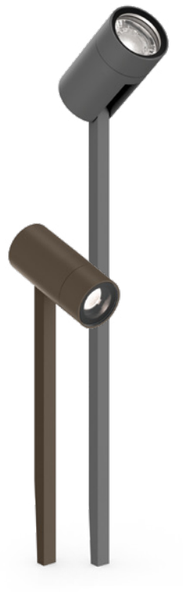

Plug & Play
24V



ALWAYS USE

Plug & Play straight connector IP67
2x 24V female connector

CODE
90014504


Plug & Play t-connector IP67
3x 24V female connector

CODE
90014501

OPTIONAL

Plug & Play extension cable IP67
2x 24V male plug

CODE	
0.5m	90014505
1m	90014506
2.5m	90014502
5m	90014503



1.0

LED PCB 4W | 24V | ground spike
aluminium | glass
Plug & Play connector system
incl. 2.5m cable | male plug

IP65 H07R-F 0°-135° M-30° L80|50K


2700K | CRI >90 | 245lm

	CODE
	767562A3
	767562Q3

ALWAYS USE

Plug & Play driver | 220-240VAC | 24V
IP67 | incl. 2.5m cable with 240V plug
incl. 2.5 cable with 24V male plug

	CODE
30W	90018014
75W	90018015



2.0

LED PCB 8W | 24V | ground spike
aluminium | glass
Plug & Play connector system
incl. 2.5m cable | male plug

IP65 H07R-F 0°-135° M-33° L80|50K

2700K | CRI >90 | 440lm

	CODE
	767662A3
	767662Q3

ALWAYS USE

Plug & Play driver | 220-240VAC | 24V
IP67 | incl. 2.5m cable with 240V plug
incl. 2.5 cable with 24V male plug

	CODE
30W	90018014
75W	90018015



PRIVATE RESIDENCE AUSTRIA

REED

Outdoor
Floor surface



Plug & Play
24V

ALWAYS USE

Plug & Play straight connector IP67
2x 24V female connector

CODE
90014504


Plug & Play t-connector IP67
3x 24V female connector

CODE
90014501

OPTIONAL

Plug & Play extension cable IP67
2x 24V male plug

	CODE
0.5m	90014505
1m	90014506
2.5m	90014502
5m	90014503



1.0

LED PCB 5W | 24V | ground spike
aluminium | opal PC cover
Plug & Play connector system
incl. 2.5m cable | male plug

IP65 H07R-F L80|50K


2700K | CRI >90 | 330lm

	CODE
	770182A3
	770182Q3

ALWAYS USE

Plug & Play driver | 220-240VAC | 24V
IP67 | incl. 2.5m cable with 240V plug
incl. 2.5 cable with 24V male plug

	CODE
30W	90018014
75W	90018015



2.0

LED PCB 6W | 24V | ground spike
aluminium | opal PC cover
Plug & Play connector system
incl. 2.5m cable | male plug

IP65 H07R-F L80|50K

2700K | CRI >90 | 395lm

	CODE
	770282A3
	770282Q3

ALWAYS USE

Plug & Play driver | 220-240VAC | 24V
IP67 | incl. 2.5m cable with 240V plug
incl. 2.5 cable with 24V male plug

	CODE
30W	90018014
75W	90018015


back



PRIVATE RESIDENCE AUSTRIA

POLA

Outdoor
Floor surface

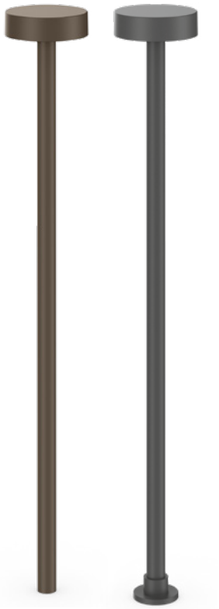

Plug & Play
24V

ALWAYS USE

Plug & Play straight connector IP67
2x 24V female connector

CODE
90014504


Plug & Play t-connector IP67
3x 24V female connector

CODE
90014501

OPTIONAL

Plug & Play extension cable IP67
2x 24V male plug

	CODE
0.5m	90014505
1m	90014506
2.5m	90014502
5m	90014503



2.0

LED PCB 5W | 24V | ground spike
aluminium | glass
Plug & Play connector system
incl. 2.5m cable | male plug

IP65 H07R-F L80|100K


2700K | CRI >90 | 250lm

	CODE
	7381A2A3
	7381A2Q3

ALWAYS USE

Plug & Play driver | 220-240VAC | 24V
IP67 | incl. 2.5m cable with 240V plug
incl. 2.5 cable with 24V male plug

	CODE
30W	90018014
75W	90018015



2.1

LED PCB 5W | 24V | fixation plate
aluminium | glass
Plug & Play connector system
incl. 2.5m cable | male plug

IP65 H07R-F L80|100K

2700K | CRI >90 | 250lm


	CODE
	7382A2A3
	7382A2Q3

ALWAYS USE

Plug & Play driver | 220-240VAC | 24V
IP67 | incl. 2.5m cable with 240V plug
incl. 2.5 cable with 24V male plug

	CODE
30W	90018014
75W	90018015

back

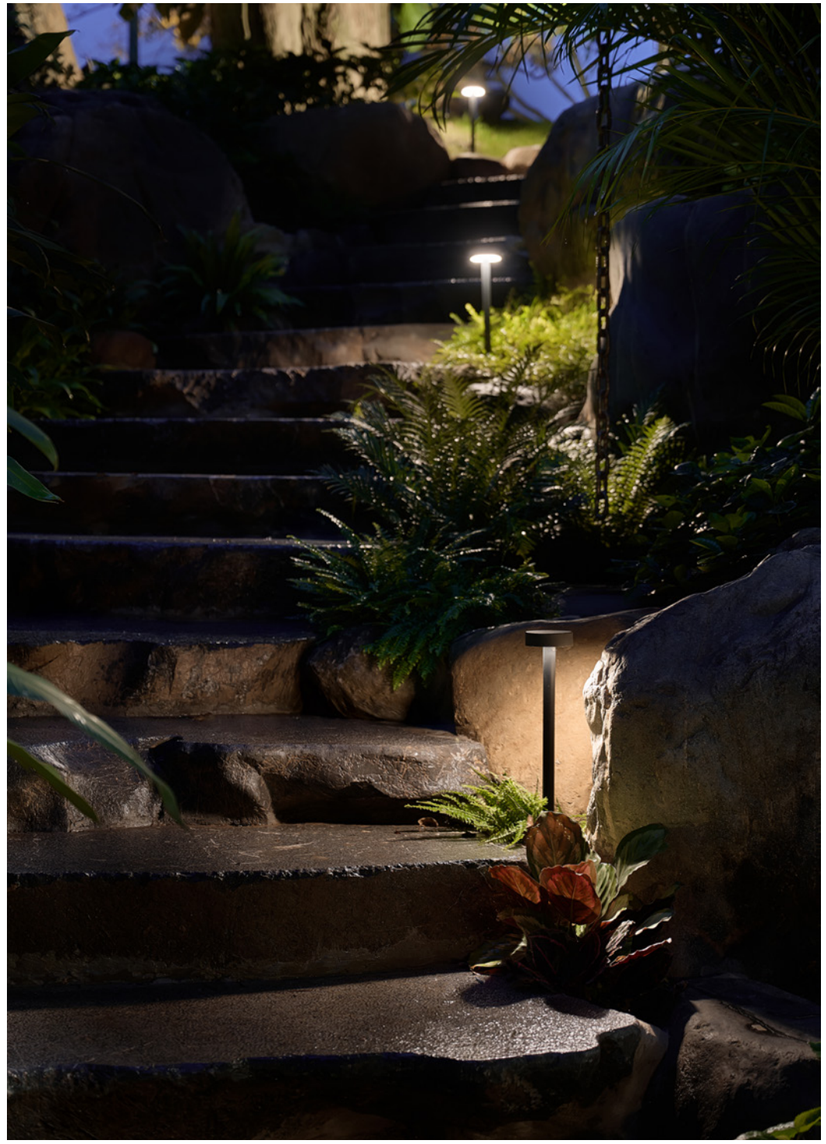




acces

sories

DRIVER | CONTROL GEAR

Accessories



easy and fast installation with
quick connectors pre assembled
on our drivers and modules

DRIVER 180mA 7.5W DIM


7.5W | 180mA | 27-42V | phase-cut dim
220-240VAC | precabled 150mm wire
and quick connector to luminaire
50-60Hz
L/W/H 68x33x22
IP20



CODE
90226202

DRIVER 180mA 7.2W DALI


7.2W | 180mA | 10-40V | DALI-2 | push
dim | 220-240VAC | precabled 150mm
wire and quick connector to luminaire
50-60Hz
L/W/H 166x29x21
IP20



CODE
90246301

DRIVER 200mA 10W DIM


10W | 200mA | 30-42V | phase-cut dim
220-240VAC
50-60Hz | 10-100%
L/W/H 85x22x41
IP20



CODE
90226402

DRIVER 200mA 8W DALI


8W | 200mA | 10-40V | DALI-2 | push
dim | 220-240VAC | precabled 150mm
wire and quick connector to luminaire
50-60Hz | 1-100%
L/W/H 166x29x21
IP20



CODE
90246302

DRIVER 250mA 5W DIM

5W | 250mA |10-20V | phase-cut dim
220-240VAC | precabled with quick
connector to luminaire | wire through
50-60Hz
L/W/H 96x45x26
IP20



CODE
90226403W

DRIVER 250mA 5W DIM


5W | 250mA |12-21V | phase-cut dim
220-240VAC | precabled with quick
connector to luminaire | 50-60Hz
L/W/H 68x33x22
IP20



CODE
90226201

DRIVER 250mA 5W DIM

5W | 250mA | 12-21V | phase-cut dim
220-240VAC | precabled with quick
connector to luminaire | 3 pole wire
through box | 50-60Hz
L/W/H 68x33x22
IP20




CODE

1 pc.	90226201W
20 pcs.	90226201WM

DRIVER 250mA 10.5W DIM


10.5W | preset at 250mA | 26-42V
phase-cut dim | 220-240VAC
50-60Hz | 10-100%
L/W/H 122x41x23
IP20



CODE
90226501

DRIVER 250mA 10W DALI


10W | 250mA | 10-40V | DALI-2
push dim | 220-240VAC | precabled
with 150mm wire and quick
connector to luminaire | 50-60Hz
L/W/H 166x29x21
IP20



CODE
90246403

DRIVER 250mA 10W DALI

10W | 250mA | 10-40V | DALI-2
push dim | 220-240VAC | precabled
with 150mm wire and quick
connector to luminaire | wire through
50-60Hz
L/W/H 185x30x21
IP20




CODE

1 pc.	90246403W
20 pcs.	90246403WM


back

DRIVER 350mA 3.5W
3.5W | 350mA | 2.7-10V
220-240VAC | 50-60Hz
L/W/H 65x29x18
IP20




CODE
90213102

DRIVER 350mA 6W
6W | 350mA | 8.6-18V
100-240VAC | precabled with quick connector to luminaire | 50-60Hz
L/W/H 66x39x22
IP20



CODE
90213303

DRIVER 350mA 6W
6W | 350mA | 8.6-18V
100-240VAC | precabled with quick connector to luminaire | 3 pole wire through box | 50-60Hz
L/W/H 66x39x22
IP20



CODE


1 pc.	90213303W
20 pcs.	90213303WM

DRIVER 350mA 7.7W
7.7W | 350mA | 3-22V
200-240VAC | 50-60Hz
L/W/H 68x35x21
IP20



CODE
90213202

DRIVER 350mA 7W DIM
7W | 350mA | 10-20V | phase-cut dim
220-240VAC | precabled with quick connector to luminaire | wire through
50-60Hz
L/W/H 96x45x26
IP20




CODE
90223407W

DRIVER 350mA 7W DIM
7W | 350mA | 12-21V | phase-cut dim
220-240VAC | precabled with quick connector to luminaire | 50-60Hz
L/W/H 68x33x22
IP20



CODE
90223301


DRIVER 350mA 7W DIM
7W | 350mA | 12-21V | phase-cut dim
220-240VAC | precabled with quick connector to luminaire | 3 pole wire through box | 50-60Hz
L/W/H 68x33x22
IP20



CODE


1 pc.	90223301W
20 pcs.	90223301WM

DRIVER 350mA 10W DIM
10W | 350mA | 13-26V | phase-cut dim
220-240VAC | precabled with quick connector to luminaire | 50-60Hz
L/W/H 115x41x25
IP20



CODE
90223406

DRIVER 350mA 10W DIM
10W | 350mA | 13-26V | phase-cut dim
220-240VAC | precabled 150mm wire and quick connector to luminaire
3 pole wire through box | 50-60Hz
L/W/H 115x41x25
IP20



CODE


1 pc.	90223406W
20 pcs.	90223406WM

DRIVER 350mA 10W DIM
10W | 350mA | 14-28V | 1-10V
phase-cut dim | 220-240VAC | 50-60Hz
10-100%
L/W/H 102x51x30
IP20




CODE
90223401

DRIVER 350mA 13W DIM
13W | 350mA | 26-38V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 138x44x30
IP20




CODE
90223404

DRIVER 350mA 14.7W DIM
14.7W | 350mA | 26-42V | phase-cut dim
220-240VAC | 50-60Hz
10-100%
L/W/H 125x41x23
IP20




CODE
90223504

DRIVER 350mA 14W DALI
14W | preset at 350mA | 10-40V
DALI-2 | push dim | 220-240VAC
precabled 150mm wire and quick connector to luminaire | 50-60Hz
1-100%
L/W/H 166x29x21
IP20 68 85 | 78 73 | 88 65



CODE
90243502


DRIVER 350mA 14W DALI
14W | preset at 350mA | 10-40V
DALI-2 | push dim | 220-240VAC
precabled 150mm wire and quick connector to luminaire | wire through
50-60Hz | 1-100%
L/W/H 185x30x21
IP20



CODE


1 pc.	90243502W
20 pcs.	90243502WM

DRIVER 350mA 4.2W IP66
4.2W | 350mA | 3-12V
90-264VAC | 50-60Hz
L/W/H 38x29x23
IP66




CODE
90213101

DRIVER 350mA 17W IP68
17W | 350mA | 5-49V
220-240VAC | 50-60Hz
L/W/H 122x54x26
IP68



CODE
90213602

DRIVER 350mA 4.5W DIM IP44
4.5W | 350mA | 8-13V | phase-cut dim
220-240VAC | 50-60Hz | 5-100%
L/W/H 38x30x20
IP44




CODE
90223101

DRIVER 350/500/700mA 17.5-20W
350/500/700mA output selection
17.5W | 350mA | 25-50V
20W | 500mA | 20-40V
20W | 700mA | 14-28.5V
220-240VAC | 50-60Hz
L/W/H 102x51x30
IP20



CODE
90218601

DRIVER 350/500/700mA 17-32W DIM
350/500/700mA | dipswitch selection
17W | 350mA | 2-47V
24W | 500mA | 2-47V
32W | 700mA | 2-46V
phase-cut dim | not for ambient dim
220-240VAC | 50-60Hz | push dim
L/W/H 166x46x34
IP20



CODE
90228801

DRIVER 500mA 6W
6W | 500mA | 3-12V
90-264VAC | 50-60Hz
L/W/H 68x35x21
IP20




CODE
90214201

DRIVER 500mA 10W
10W | 500mA | 13-20V
220-240VAC | precabled with quick connector to luminaire | 50-60Hz
L/W/H 60x39x20
IP20



CODE
90214406


DRIVER 500mA 10W
10W | 500mA | 13-20V
220-240VAC | precabled with quick connector to luminaire | 3 pole wire through box | 50-60Hz
L/W/H 60x39x20
IP20



CODE


1 pc.	90214406W
20 pcs.	90214406WM

DRIVER 500mA 6.5W DIM
6.5W | preset at 500mA
7-13V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 122x41x23
IP20




CODE
90224301

DRIVER 500mA 10W DIM
10W | 500mA | 10-20V | phase-cut dim
220-240VAC | precabled with quick connector to luminaire | wire through 50-60Hz
L/W/H 96x45x26
IP20




CODE
90224404W

DRIVER 500mA 10W DIM
10W | 500mA | 12-21V | phase-cut dim
220-240VAC | precabled with quick connector to luminaire | 50-60Hz
L/W/H 115x41x25
IP20



CODE
90224403


DRIVER 500mA 10W DIM
10W | 500mA | 12-21V | phase-cut dim
220-240VAC | precabled with quick connector to luminaire | 3 pole wire through box | 50-60Hz
L/W/H 115x41x25
IP20



CODE

1 pc.	90224403W
20 pcs.	90224403WM

DRIVER 500mA 19W DIM
19W | preset at 500mA
26-38V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 138x44x30
IP20




CODE
90224602

DRIVER 500mA 10W 1-10V DIM
10W | 500mA | 10-20V | 1-10V dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 102x51x30
IP20




CODE
90234401

DRIVER 500mA 15W DALI
15W | 500mA |10-31V | DALI-2
push dim | 220-240VAC | precabled with 150mm wire and quick connector to luminaire | wire through
50-60Hz 10-100%
L/W/H 166x29x21
IP20



CODE
90244501


DRIVER 500mA 15W DALI
15W | 500mA |10-31V | DALI-2
push dim | 220-240VAC | precabled with 150mm wire and quick connector to luminaire | wire through
50-60Hz 10-100%
L/W/H 185x30x21
IP20



CODE


1 pc.	90244501W
20 pcs.	90244501WM

DRIVER 500mA 24W DALI
24W | preset at 500mA | 6-49V
DALI-2 | push dim | 220-240VAC
precabled with quick connector to luminaire | 50-60Hz | 1-100%
L/W/H 143x43x30
IP20




CODE
90244701

DRIVER 500mA 7W IP67
7W | 500mA | 5-14.5V
100-240VAC | 47-63Hz
L/W/H 57x41x24
IP67



CODE
90214301

DRIVER 500mA 24W IP68
24W | 500mA | 5-49V
220-240VAC | 50-60Hz
L/W/H 122x54x26
IP68




CODE
90214702

DRIVER 700mA 6W
6W | 700mA | 3-8.4V
230-240VAC | 50-60Hz
L/W/H 68x35x21
IP20




CODE
90215203

DRIVER 700mA 10W DIM
10W | preset at 700mA
8-14V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 122x41x23
IP20




CODE
90225402

DRIVER 700mA 14W DIM
14W | preset at 700mA
12-20V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 122x41x23
IP20




CODE
90225502

DRIVER 700mA 20W DIM
20W | preset at 700mA
15-28V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 138x44x30
IP20




CODE
90225604

DRIVER 700mA 25W DIM
25W | 700mA | 17-35V | phase-cut dim
220-240VAC | 50-60Hz | 5-100%
L/W/H 145x51x30
IP20




CODE
90225701

DRIVER 700mA 30W DIM
30W | preset at 700mA
26-42V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 138x44x30
IP20




CODE
90225702

DRIVER 700mA 28W DALI
28W | preset at 700mA | 6-40V
DALI-2 | push dim | 220-240VAC
precabled with quick connector to
luminaire | 50-60Hz | 1-100%
L/W/H 97x43x30
IP20



CODE
90245704

DRIVER 700mA 7W IP67
7W | 700mA | 3-10.5V
90-295VAC | 47-63Hz
L/W/H 57x41x24
IP67 0.07kg




CODE
90215301

DRIVER 24V/15W
15W | 24V
220-240VAC | 50-60Hz
L/W/H 107x33x22
IP20




CODE
90212501

DRIVER 24V/25W
2.4-25W | 24V | phase-cut dim | trailing
edge only | 220-240VAC | 50-60Hz
L/W/H 128x52x30
IP20




CODE
90222701

DRIVER 24V/35W
35W | 24V | PWM dim
220-240VAC | 50-60Hz
L/W/H 142x43x30
IP20




CODE
90212801

DRIVER 24V/50W
12-50W | 24V | phase-cut dim | trailing
edge only | 220-240VAC | 50-60Hz
L/W/H 166x52x32
IP20




CODE
90222901

DRIVER 24V/100W
100W | 24V | PWM dim
220-240VAC | 50-60Hz
L/W/H 295x43x30
IP20




CODE
90212902

DRIVER 24V/100W DALI
100W | 24V | DALI
220-240VAC | 50-60Hz
L/W/H 295x43x30
IP20




CODE
90242901

DRIVER 24V/35W IP67
35W | 24V
100-277VAC | 50-60Hz
L/W/H 199x42x43
IP67



CODE
90212802


DRIVER 24V/100W IP67
100W | 24V
100-277VAC | 50-60Hz
L/W/H 178x68x39
IP67



CODE
90212903


DRIVER-CONFIGURATOR
weverducre.com/driver-configurator

WIRE THROUGH CONNECTOR BOX
3 pole
L/W/H 105x58x30
IP20 min.66



CODE
90059145

WIRE THROUGH CONNECTOR BOX
3 pole + DALI
L/W/H 105x58x30
IP20 min.66




CODE
90059146

WIRE THROUGH CONNECTOR BOX
3 pole IP68 | quick IP connection box with Gel included
L/W/H 90x43x20
IP68 min.48

CODE
90059149

PAR16 FLAT HEAD
PAR16 | GU10
220-240VAC | 50-60Hz
IP20



CODE
90059125

CONNECTION BOX 3P PAR16
incl. strain relief | 3 pole push connector | incl. PAR16 socket
incl. through-wiring
L/W/H 75x35x25




CODE
90059126

DALI TO PHASE-CUT DIMMING MODULE
for converting a DALI signal to phase-cut dim | for max. 20 devices
LED | 10-300W | 230V
L/W/H 120x30x22
IP20

CODE
90270901

DIMMER DIN RAIL
max. 200W LED | 230V
phase-cut dim
L/W/H 17x55x90
IP30



CODE
90019018

DIMMER FOR SWITCH
max. 200W LED | 230V
phase-cut dim
L/W/H 48x18x46
IP30



CODE
90019017

back

LED MODULE HO
12W | 350mA | 35Vf
1800-3000K | CRI >90 | 1050lm
compatibility on request
IP20 CE M-26°



	CODE
	905251W9
	905251B9

LED MODULE HO 2700K
12W | 350mA | 35Vf
2700K | CRI >90 | 1340lm
compatibility on request
IP20 CE M-26°



	CODE
	905251W3
	905251B3

LED MODULE HO 3000K
12W | 350mA | 35Vf
3000K | CRI >90 | 1410lm
compatibility on request
IP20 CE M-26°




	CODE
	905251W5
	905251B5

LED MODULE HO 4000K
12W | 350mA | 35Vf
4000K | CRI >90 | 1420lm
compatibility on request
IP20 CE M-26°



	CODE
	905251W7
	905251B7

LED MODULE CABLE
extension cable between LED module and driver



	CODE
1m	90019200
2m	90019201
3m	90019202

PAR16 LED 2700K
6.1W | GU10 | phase-cut dim | with lens
220-240VAC | 50-60Hz | aluminium
2700K | CRI >90 | 445lm
IP20 CE M-35°



	CODE
	901228W3
	901228B3

PAR16 LED 3000K
6.1W | GU10 | phase-cut dim | with lens
220-240VAC | 50-60Hz | aluminium
3000K | CRI >90 | 465lm
IP20 CE M-35°



	CODE
	901228W5
	901228B5

PAR16 LED HE 2700K
5W | GU10 | 106 lm/W | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 530lm
IP20 CE M-35°



	CODE
	907228W3
	907228B3

PAR16 LED HE 3000K
5W | GU10 | 107 lm/W | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 535lm
IP20 CE M-35°



	CODE
	907228W5
	907228B5

PAR16 LED 2700K
3.7W | GU10
220-240VAC | 50-60Hz
2700K | CRI >80 | 350lm
IP20 CE M-36°



	CODE
	905227S2

PAR16 LED 3000K
3.7W | GU10
220-240VAC | 50-60Hz
3000K | CRI >80 | 350lm
IP20 CE M-36°



	CODE
	905227S4

METAL SPRING CLIP
alternative front lamp fixation spring
for ø 50 lamp rings
LED | PAR16 | max. 12W
DEEP ADJUST | **DEEP** 2.0
PLANO | **STRANGE** ceiling
SOLID



	CODE
	90019700

SPRING CLIP
lamp fixation | push-in system
for ø 50 lamp rings
LED | PAR16 | max. 12W
DEEP ADJUST | **DEEP** 2.0
PLANO | **STRANGE** ceiling
SOLID

	CODE
	900198W0
	900198S0
	900198G0
	900198M0
	900198Q0
	900198B0

PAR11 LED 2700K
4.3W | GU10 | phase-cut dim | with lens
220-240VAC | 50-60Hz | aluminium
2700K | CRI >90 | 240lm
IP20 CE W-50°



	CODE
	901128W3
	901128B3

PAR11 LED 3000K
4.3W | GU10 | phase-cut dim | with lens
220-240VAC | 50-60Hz | aluminium
3000K | CRI >90 | 255lm
IP20 CE W-50°



	CODE
	901128W5
	901128B5

back

QT14 LED 3000K
3W | G9
220-240VAC | 50-60Hz
3000K | CRI >80 | 300lm
IP20 CE



	CODE
clear	9019G703

QT14 LED 2700K
3.5W | G9
220-240VAC | 50-60Hz
2700K | CRI >90 | 340lm
IP20 CE



	CODE
opal	9010G803

QT14 LED 3000K
3.5W | G9 | phase-cut dim
220-240VAC | 50-60Hz
3000K | CRI >90 | 350lm
IP20 CE




	CODE
opal	9010G805

C35 LED 2700K
5.5W | E14 | phase-cut dim | 20-100%
220-240VAC | 50-60Hz
2700K | CRI >90 | 450lm
IP20 CE



	CODE
opal	9003C103

ST64 LED 2200K DIM
5.9W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | CRI >95 | 435lm
IP20 CE



	CODE
gold tinted	9003E110

T25-85 LED 2200K
5W | E14 | phase-cut dim
220-240VAC | 50-60Hz
2200K | CRI >90 | 460lm
IP20 CE



	CODE
gold tinted	9003C108

T25-85 LED 2500K
5W | E14 | phase-cut dim
220-240VAC | 50-60Hz
2500K | CRI >90 | 480lm
IP20 0.02kg CE



	CODE
gold tinted	9003C107

T25-85 LED 2700K
5W | E14 | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 500lm
IP20 CE



	CODE
gold tinted	9003C106

T30-225 LED 2200K
5.3W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | CRI >90 | 380lm
IP20 CE



	CODE
gold tinted	9003E129

T30-225 LED 2700K
5.3W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 425lm
IP20 CE



	CODE
gold tinted	9003E136

T30-300 LED 2200K
7.2W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | CRI >90 | 585lm
IP20 CE



	CODE
gold tinted	9003E130

T30-300 LED 2700K
7.4W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 610lm
IP20 CE



	CODE
gold tinted	9003E135


back

A60 LED 2700K DIM
5.6W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 480lm
IP20 CE




CODE	
clear	9003E138

A60 LED 2700K
9W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 800lm
IP20 CE




CODE	
opal	9003E152

A65 LED 2700K
14.6W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 1375lm
IP20 CE



CODE	
opal	9003E153

A60 LED 2200K
3.8W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | CRI >95 | 245lm
IP20 CE




CODE	
gold tinted	9003E109

A60 LED 2700K
5.5W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 405lm
IP20 CE




CODE	
gold mirror	9003E139
silver mirror	9003E140

G95 LED 2700K
4.5W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 375lm
IP20 CE




CODE	
clear	9003E160

G95 LED 2700K
11.2W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 1100lm
IP20 CE




CODE	
opal	9003E154

G95 LED 2700K
10W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 1060lm
ceramic soft look
IP20 CE




CODE	
opal	9003E163

G95 LED 2200K
5.4W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | CRI >95 | 380lm
IP20 CE



CODE	
gold tinted	9003E111

G95 LED 2200K
5.1W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | CRI >95 | 370lm
IP20 CE



CODE	
gold mirror	9003E156

G95 LED 2700K
5W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 395/410lm
IP20 CE




CODE	
gold mirror	9003E142
silver mirror	9003E157

G125 LED 2200K
6.2W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | CRI >95 | 450lm
IP20 CE



CODE	
gold tinted	9003E112


REPLACEMENT PLUG
for Switzerland | Liechtenstein



CODE

90019211

REPLACEMENT PLUG
for UK | Ireland | Malta | Arabic peninsila



CODE

90019212

HONEYCOMB LOUVER
BLIEK PETIT | CENO | LECA PIRRO | QITO



CODE

915230B0

LIKO 1.0 HONEYCOMB LOUVER



CODE

915231B0

LIKO 2.0 HONEYCOMB LOUVER



CODE

915232B0

LIKO 3.0 HONEYCOMB LOUVER



CODE

915233B0

ODREY
inner cover for 1.6



CODE

911420W0

911420G0

911420B0


MATCH TRIMLESS DRILLING TOOL
for easy plaster finish



CODE

90019300


FINLIN COVER PLATE ADAPTER
for concrete housings



CODE

900194B0


FINLIN
wall/base spacer for overlapping luminaires



CODE

900195B0


FINLIN ROUND
wall/base spacer for overlapping luminaires



CODE

900196B0


BOX | RAY
flaps for adjustable beam angle white | for BOX/RAY QT14 only



CODE

900401W0


X-BEAM
snoot



CODE

90019023

X-BEAM
snoot round



CODE

90019031

back

DEEP ADJUST PETIT TRIMLESS | BLIEK PETIT TRIMLESS | QITO TRIMLESS

aluminium plasterkit

Ⓓ 78-80 ⎍ 80 ⟡ 12.5, 15, 20, 25




CODE

90017210

DEEP ADJUST TRIMLESS

aluminium plasterkit

Ⓓ 105-110 ⟡ 12.5, 15, 20, 25




CODE

90017209

STRANGE PETIT TRIMLESS 1.0

aluminium plasterkit

Ⓤ 64x64 ⟡ 7-32




CODE

90017202

STRANGE PETIT TRIMLESS 2.0

aluminium plasterkit

Ⓤ 64x117 ⟡ 7-32




CODE

90017205

STRANGE PETIT TRIMLESS 3.0

aluminium plasterkit

Ⓤ 64x169 ⟡ 7-32




CODE

90017208

STRANGE TRIMLESS 1.0 SNEAK TRIMLESS 1.0

aluminium plasterkit

Ⓤ 86x86 ⟡ 7-32




CODE

90017120

STRANGE TRIMLESS 2.0 SNEAK TRIMLESS 2.0

aluminium plasterkit

Ⓤ 156x86 ⟡ 7-32



CODE

90017121

LITO

plasterkit



CODE

90017119


back

PLANO 1.0
plasterkit




CODE
90017104

PLANO 2.0
plasterkit




CODE
90017105

STRIPE 0.4 | 0.7
recessed housing incl. plasterkit
191x75 ⎍65




CODE
90012037

STRIPE 2.2
recessed housing incl. plasterkit
251x76 ⎍65




CODE
90012038

ORIS 0.7 | RETO 2.0
recessed housing incl. plasterkit
191x58 ⎍75




CODE
90012039

ORIS 0.8 | RETO 0.8
recessed housing incl. plasterkit
70x70 ⎍80




CODE
90012047

ORIS 1.3 | RETO 1.3
recessed housing incl. plasterkit
122x122 ⎍75



CODE
90012041

ORIS 2.0
recessed housing incl. plasterkit
123x191 ⎍75




CODE
90012043

LITO
always use in combination with plasterkit
122x90 ⎍45



CODE
90012027

ORIS 0.7 | RETO 2.0
concrete housing
192x58 ⎍60




CODE
90012044

ORIS 0.8 | RETO 0.8
concrete housing
70x70 ⎍65




CODE
90012046

ORIS 1.3 | RETO 1.3
concrete housing
122x122 ⎍60




CODE
90012040

ORIS 2.0
concrete housing
123x191 ⎍60




CODE
90012042

MAP 0.6 | CHART 0.6
BLINK | TRIMLESS
ground housing
137 ⎍110




CODE
90012201

MAP 0.9 | CHART 0.9
ground housing
137 ⎍130




CODE
90012202

MAP 1.2 | CHART 1.2
MAP ASYM 1.2 | CHART ASYM 1.2
ground housing
190 ⎍158



CODE
90012203

MAP 1.6 | CHART 1.6
MAP ASYM 1.6 | CHART ASYM 1.6
ground housing
220 ⎍184




CODE
90012204

back

FLYRA SINGLE/MULTI BASE


max. 25W | const. volt. | 24V
phase-cut dim | W/H ø62x102
polycarbonate



	CODE
	914224M0
	914224B0

FLYRA MULTI BASE


max. 50W | const. volt. | 24V
phase-cut dim | W/H ø200x38
polycarbonate



	CODE
	914225M0
	914225B0

FLYRA CABLE CONNECTOR

cable from one luminaire to another
incl. plugs



	CODE
0.3m	915210B0
0.6m	915211B0
0.9m	915212B0
1.2m	915213B0

FLYRA FIX CONNECTOR


electrical | mechanical | straight
central suspension



	CODE
	915221B0

ILANE BLACK DIFFUSER


only for 1.0



	CODE
2m	911902B1
3m	911903B1

ILANE BLACK DIFFUSER

only for 3.0



	CODE
2m	911912B1
3m	911913B1

ILANE MINI CONNECTOR


strip to strip - continuous



	CODE
IP20	90014272

ILANE MINI CONNECTOR


strip to wire



	CODE
IP20	90014268

ILANE MINI CONNECTOR


strip to strip



	CODE
IP20	90014269

STREX DRIVER 48V/100W


100W | 48V
220-240VAC | 50-60Hz
L/W/H 350x30x18
IP20



	CODE
	90218901

STREX DRIVER 48V/150W

150W | 48V
220-240VAC | 50-60Hz
L/W/H 350x30x18
IP20



	CODE
	90218902

STREX DRIVER 48V/250W


250W | 48V
220-240VAC | 50-60Hz
L/W/H 400x40x22
IP20



	CODE
	90218903

STREX DALI SELV DEVICE


for 48V system | max. 300W | 48VDC
L/W/H 212x37x26



	CODE
	90019193

RECESSED

track | custom cuts | 48V | 15A | DALI




	CODE
< 1m	904111W0CC
< 1m	904111B0CC
< 2m	904112W0CC
< 2m	904112B0CC
< 3m	904113W0CC
< 3m	904113B0CC

CC = for lengths specifications please add four digits in mm

SURFACE

track | custom cuts | 48V | 15A | DALI




	CODE
< 1m	904211W0CC
< 1m	904211B0CC
< 2m	904212W0CC
< 2m	904212L0CC
< 2m	904212M0CC
< 2m	904212Q0CC
< 2m	904212B0CC
< 3m	904213W0CC
< 3m	904213L0CC
< 3m	904213M0CC
< 3m	904213Q0CC
< 3m	904213B0CC

CC = for lengths specifications please add four digits in mm

SUSPENDED

track | custom cuts | 48V | 15A | DALI




	CODE
< 1m	904211W0CC
< 1m	904211B0CC
< 2m	904212W0CC
< 2m	904212L0CC
< 2m	904212M0CC
< 2m	904212Q0CC
< 2m	904212B0CC
< 3m	904213W0CC
< 3m	904213L0CC
< 3m	904213M0CC
< 3m	904213Q0CC
< 3m	904213B0CC

CC = for lengths specifications please add four digits in mm

SUSP. INDIRECT LIGHT

track | custom cuts | 48V | 15A | DALI
3000K | CRI >90 | 14W/m | 950lm/m
with indirect light



	CODE
< 2m	904512W5CC
< 2m	904512B5CC
< 3m	904513W5CC
< 3m	904513B5CC

CC = for lengths specifications please add four digits in mm

TRACK ADAPTER 1.0 HV


no space for driver | cable diameter max. 10mm | for suspended luminaires without steel wire
incl. strain relief
max. weight 10kg



	CODE
	90014044
■	90014043


TRACK ADAPTER 2.0 HV

no space for driver | cable diameter max. 5mm | for suspended luminaires without steel wire
incl. strain relief
max. weight 3kg



	CODE
	90014277
■	90014278


ADJUSTABLE CORNER



	CODE
	90014042
■	90014041

COVERPLATE I/L/T/X

only use with recessed tracks



	CODE
	90014126
■	90014127


COVERPLATE END FEEDS

only use with recessed tracks



	CODE
	90014124
■	90014125


X-FEED



	CODE
	90014049
■	90014050

T-FEED 1.0


top view



	CODE
	90014010
■	90014011

T-FEED 2.0


top view



	CODE
	90014012
■	90014013

T-FEED 3.0


top view



	CODE
	90014014
■	90014015

T-FEED 4.0

top view



	CODE
	90014016
■	90014017

CUTTING TOOL

for cutting the inner copper cables of 3-phase track and 48V track
CE TÜV



	CODE
	90014165

TRACK ADAPTER HV


no space for driver | cable diameter max. 6.6mm | for suspended luminaires without steel wire
incl. strain relief
max. weight 5kg



	CODE
	90014279
■	90014280

TRACK ADAPTER LV


DALI-2 | 350mA | incl. driver



	CODE
	914174W0
■	914174B0

OPLIA TRACK ADAPTER LV

DALI-2 | 250mA | incl. driver



	CODE
	914172W0
■	914172B0

POWER OUTLET

10A | 220-250V | 50-60Hz
Schuko adapter
PC UL94V0 + copper 50N
L/W/H 85x54x103
IP20 CE

	CODE
	90014254
■	90014253


HOOK

max. weight 5kg




	CODE
	90014284
■	90014285

FLEXIBLE CONNECTOR



	CODE
	90014288
■	90014289


X-FEED



	CODE
	90014248
■	90014249

T-FEED 1.0


top view



	CODE
	90014228
■	90014229

T-FEED 2.0


top view



	CODE
	90014230
■	90014231

T-FEED 3.0


top view



	CODE
	90014232
■	90014233

T-FEED 4.0

top view




	CODE
	90014234
■	90014235

back

SUSPENSION OPTIONS


Accessories

STRAIN RELIEF
for suspended luminaire power cable fixation in base




	CODE
	90052064

CABLE WALL/CEILING BRACKET
for cable 4.25-5.5mm diameter




	CODE
	90019197
	90019198

SINGLE BASE LV
DALI-2 | 350mA | incl. driver




	CODE
	914117W0
	914117B0

OPLIA SINGLE BASE LV
DALI-2 | 250mA | incl. driver




	CODE
	914116W0
	914116B0

MULTI CHANDELIER LV
3 luminaires | 3x175mA
phase-cut dim | incl. driver
always use with hooks




	CODE
	914161WW0
	914161BL0
	914161BM0
	914161BQ0
	914161BB0

MULTI CHANDELIER LV
6 luminaires | 6x175mA
phase-cut dim | incl. driver
always use with hooks




	CODE
	914162WW0
	914162BL0
	914162BM0
	914162BQ0
	914162BB0

MULTI CHANDELIER LV
9 luminaires | 9x175mA
phase-cut dim | incl. driver
always use with hooks




	CODE
	914163WW0
	914163BL0
	914163BM0
	914163BQ0
	914163BB0

MULTI CHANDELIER HV
1-9 luminaires | always use with hooks




	CODE
	914160WW0
	914160BL0
	914160BM0
	914160BQ0
	914160BB0

HOOK
always use for MULTI CHANDELIER




	CODE
	90052083
	90052084

HOOK
for cable 4.25-5.5mm diameter | for single and multi suspension | also for textile cable




	CODE
	90052079
	90052080

HOOK
standard multi suspension hook
for ø5 plugs



	CODE
	90052025
	90052024

HOOK
optional multi suspension hook
for ø6 plugs




	CODE
	90052066
	90052065

WIRO | KUJO SUSPENDED


Accessories

WIRO
cable wall bracket
only for WIRO textile cable




	CODE
	90052062

WIRO CABLE PLUG & PLAY
E27 LED 4-25W | connector set for one shade | black textile cable | incl. cable plug with dimmer | 2 cable brackets included




		CODE
	8.5m	90015165

WIRO DECENTER SET 1.0
A60 max. 60W | E27
220-240VAC | 50-60Hz
suspension set for 1 shade
round ceiling base | black textile cable
1 base + 1 end stop included




		CODE
	2.6m	90052050
	6m	90052051

WIRO DECENTER SET 2.0
2x A60 max. 60W | E27
220-240VAC | 50-60Hz
suspension set for 2 shades
round ceiling base | black textile cable
1 multibase + 2 end stops included




		CODE
	2.6m	90052055
	6m	90052056

WIRO DECENTER SET 3.0
3x A60 max. 60W | E27
220-240VAC | 50-60Hz
suspension set for 3 shades
round ceiling base | black textile cable
1 multibase + 3 end stops included




		CODE
	2.6m	90052060
	6m	90052063

WIRO DECENTER SET 4.0
4x A60 max. 60W | E27
220-240VAC | 50-60Hz
suspension set for 4 shades
round ceiling base | black textile cable
1 multibase + 4 end stops included




		CODE
	2.6m	90052067
	6m	90052078

KUJO BASE
replacement for 1.0, 2.0 for central steel wire mounting




	CODE
	914215W0
	914215SG0
	914215M0
	914215Q0
	914215B0

KUJO CONNECTORS
cable from one luminaire to another
incl. plugs | only for 2.1, 3.2, 3.2.1



		CODE
	0.3m	915210W0
	0.3m	915210SG0
	0.3m	915210B0
	0.6m	915211W0
	0.6m	915211SG0
	0.6m	915211B0

KUJO CONNECTORS
cable from one luminaire to another
incl. plugs | only for 2.1, 3.2, 3.2.1



		CODE
	0.9m	915212W0
	0.9m	915212SG0
	0.9m	915212B0
	1.2m	915213W0
	1.2m	915213SG0
	1.2m	915213B0


back

KIOSK POLE 400
straight pole | incl. ground spike




	CODE
	910101A0
	910101Q0

KIOSK POLE 600
straight pole | incl. ground spike



	CODE
	910102A0
	910102Q0

KIOSK POLE 800
straight pole | incl. ground spike




	CODE
	910103A0
	910103Q0

SWAM POLE 400
straight pole | incl. ground spike




	CODE
	910090Q0
	910090B0

SWAM POLE 600
straight pole | incl. ground spike



	CODE
	910091Q0
	910091B0

SWAM POLE 800
straight pole | incl. ground spike




	CODE
	910092Q0
	910092B0

SWAM POLE 400
curved pole | incl. ground spike




	CODE
	910093Q0
	910093B0

SWAM POLE 600
curved pole | incl. ground spike



	CODE
	910094Q0
	910094B0

SWAM POLE 800
curved pole | incl. ground spike



	CODE
	910095Q0
	910095B0

KIOSK | SWAM
fixation plate




CODE
90019019

STIPO POLE 200
with fixation plate | 3.0, 4.0




	CODE
	910062A0
	910062Q0

STIPO POLE 400
with fixation plate | 3.0, 4.0



	CODE
	910064A0
	910064Q0

STIPO POLE 600
with fixation plate | 3.0, 4.0



	CODE
	910066A0
	910066Q0

STIPO
ground spike



CODE
90013106

X-BEAM
ground spike



CODE
90013115


back

GATE ROUND 1.0 POLE 250
pole with fixation plate




	CODE
	910121A0
	910121Q0

GATE ROUND 1.0 POLE 450
pole with fixation plate



	CODE
	910122A0
	910122Q0

GATE ROUND 1.0 POLE 650
pole with fixation plate




	CODE
	910123A0
	910123Q0

GATE ROUND 2.0 POLE 250
pole with fixation plate




	CODE
	910124A0
	910124Q0

GATE ROUND 2.0 POLE 450
pole with fixation plate



	CODE
	910125A0
	910125Q0

GATE ROUND 2.0 POLE 650
pole with fixation plate



	CODE
	910126A0
	910126Q0

GATE CARRÉ 1.0 POLE 250
pole with fixation plate




	CODE
	910111A0
	910111Q0

GATE CARRÉ 1.0 POLE 450
pole with fixation plate



	CODE
	910112A0
	910112Q0

GATE CARRÉ 1.0 POLE 650
pole with fixation plate



	CODE
	910113A0
	910113Q0

GATE CARRÉ 2.0 POLE 250
pole with fixation plate




	CODE
	910114A0
	910114Q0

GATE CARRÉ 2.0 POLE 450
pole with fixation plate




	CODE
	910115A0
	910115Q0

GATE CARRÉ 2.0 POLE 650
pole with fixation plate




	CODE
	910116A0
	910116Q0

POLE 170
with fixation plate
PALOS ROUND | PALOS CARRÉ




	CODE
	910013A0
	910013Q0
	910013B0

POLE 170
with concrete ground fixation
PALOS ROUND | PALOS CARRÉ




	CODE
	910073A0
	910073Q0
	910073B0

POLE 270
with fixation plate
PALOS ROUND | PALOS CARRÉ




	CODE
	910014A0
	910014Q0
	910014B0

POLE 270
with concrete ground fixation
PALOS ROUND | PALOS CARRÉ




	CODE
	910074A0
	910074Q0
	910074B0

POLE 470
with fixation plate
PALOS ROUND | PALOS CARRÉ




	CODE
	910016A0
	910016Q0
	910016B0

POLE 470
with concrete ground fixation
PALOS ROUND | PALOS CARRÉ




	CODE
	910076A0
	910076Q0
	910076B0

POLE 670
with fixation plate
PALOS ROUND | PALOS CARRÉ




	CODE
	910018A0
	910018Q0
	910018B0

POLE 670
with concrete ground fixation
PALOS ROUND | PALOS CARRÉ




	CODE
	910078A0
	910078Q0
	910078B0

POLE 870
with fixation plate
PALOS ROUND | PALOS CARRÉ



	CODE
	910010A0
	910010Q0
	910010B0


POLE 870
with concrete ground fixation
PALOS ROUND | PALOS CARRÉ



	CODE
	910070A0
	910070Q0
	910070B0


back

LINUS POLE 150
with fixation plate




	CODE
	910024D0
	910024A0
	910024Q0

LINUS POLE 350
with fixation plate




	CODE
	910026D0
	910026A0
	910026Q0

LINUS POLE 550
with fixation plate




	CODE
	910028D0
	910028A0
	910028Q0

LINUS
ground spike




CODE
90013103

LINUS
concrete ground fixation




CODE
90013302

PLUG & PLAY
DRIVER 24V/30W IP67
30W | 24V
220-240VAC | 50Hz
incl. 2.5m cable with 240V plug
incl. 2.5m cable with 24V male plug
CH and UK variants online
L/W/H 110x48x31
IP67 CE




CODE
90018014

PLUG & PLAY
DRIVER 24V/75W IP67
75W | 24V
220-240VAC | 50Hz
incl. 2.5m cable with 240V plug
incl. 2.5m cable with 24V male plug
CH and UK variants online
L/W/H 129x49x32
IP67 CE




CODE
90018015

PLUG & PLAY
EXTENSION CABLE
2x 24V male plug
IP67 H07RN-F CE




	CODE
0.5m	90014505
1m	90014506
2.5m	90014502
5m	90014503

PLUG & PLAY
STRAIGHT CONNECTOR
2x 24V female connector
IP67 H07RN-F CE



CODE
90014504

PLUG & PLAY
T-CONNECTOR
3x 24V female connector
incl. 2 optional caps
IP67 CE



CODE
90014501

back

icons standards

NO MORE MISUNDERSTANDINGS

ICON	ENGLISH	GERMAN	DUTCH	FRENCH	SPANISH	ITALIAN
	Cutout Round	Ausschnitt rund	Ronde inbouwopening	Découpe ronde	Corte circular	Taglio tondo
	Cutout Square	Ausschnitt eckig	Rechthoekige inbouwopening	Découpe rectangulaire	Corte rectangular	Taglio quadro
	Recessed Depth	Einbautiefe	Inbouwdiepte	Profondeur d'encastrement	Profundidad de empotramiento	Profondità dell'incasso
	Ceiling Thickness	Deckenstärke	Plafonddikte	Épaisseur du plafond	Espesar del techo	Spessore del soffitto
0°-X°/X°	Rotatable vertically | horizontally	Drehbar vertikal | horizontal	Draaibaar verticaal | horizontaal	Orientable verticalement | horizontalement	Orientable en vertical | horizontal	Orientabile in verticale | orizzontale
	Beam Angle	Abstrahlwinkel	Reflectorhoek	Faiseau	Ángulo de apertura	Fascio luminoso
N – M – W	narrow – medium – wide beamangle	engstrahlend - medium-strahlend - breitstrahlend	smal - medium - breed	étroit - moyen - large	estecho - medio - ancho	stretto - medio - largo
	Class 1 Fixture	Leuchte der Schutzklasse 1	Toestel klasse 1	Appareil classe 1	Aparato de clase 1	Lampada classe 1
	Class 2 Fixture	Leuchte der Schutzklasse 2	Toestel klasse 2	Appareil classe 2	Aparato de clase 2	Lampada classe 2
III	Class 3 Fixture	Leuchte der Schutzklasse 3	Toestel klasse 3	Appareil classe 3	Aparato de clase 3	Lampada classe 3
IP 20	IP rating	IP Bewertung	IP-classificatie	Indice de protection	Grado IP	Grado di protezione IP
IP 44	Frontal IP rating	Frontale IP Bewertung	IP-classificatie	Évaluation IP frontale	Grado IP en parte frontal	Grado di protezione IP frontale
IK 06	IK rating	Schlagfestigkeit	IK-classificatie	IK rating	Grado IK	IK rating
UGR ≤ 19	Screen-compatible workplace light	Bildschirmtaugliche Arbeitsplatzleuchte	Werkplekverlichting is compatibel met beeldscherm	Éclairage compatible pour écran d'ordinateur	Iluminación para puestos de trabajo compatible con pantallas	Adatta per ambienti di lavoro | uffici
IC rated	IC rated: may be covered with insulation material	IC Rated: kann mit Isoliermaterial abgedeckt werden	IC classificatie: kan worden bedekt met isolatiemateriaal	Classé IC: peut être recouvert d'un matériau isolant	Clasificación IC: puede cubrirse con material aislante	Protezione IC. Può essere coperto con materiale isolante
L80 | 50K	LED Lifetime: Lumen output is minimum 80% after 50.000 hours	LED-Lebensdauer: Die Lichtausbeute nach 50.000 Stunden beträgt mindestens 80 %	Led-levensduur: de lichtopbrengst na 50.000 branduren is minimaal 80%	Durée de vie des LED : l'efficacité lumineuse au bout de 50 000 heures s'élève à 80 % minimum	Vida útil de los LED: la eficiencia luminosa tras 50.000 horas es de al menos el 80 %	Durata dei LED: l'efficienza luminosa è pari ad almeno l'80% dopo 50.000 ore di funzionamento

ICON	ENGLISH	GERMAN	DUTCH	FRENCH	SPANISH	ITALIAN
CE	CE conform	CE-konform	CE-conform	Conformité CE	Conformidad CE	Conformità CE
	ENEC Certificate	ENEC Zertifikat	ENEC Certificaat	Certificat ENEC	Certificado ENEC	Certificato ENEC
	UL Certificate	UL Zertifikat	UL Certificaat	Certificat UL	Certificado UL	Certificato UL
Kelvin	Colour Temperature	Farbtemperatur	Kleurtemperatuur	Température de couleur	Temperatura de color	Temperatura colore
Blue lines	Part not included	Teil nicht inkludiert	Onderdeel niet inbegrepen	Pièce non comprise	Parte no incluida	Articolo non incluso
	Up/Down	Aufwärts/abwärts strahlen	Licht boven of onder	Éclairage haut ou bas	Emisión superior/ inferior	Luce monoemissione sopra/sotto
	Up and Down	Aufwärts und abwärts strahlend	Licht boven en onder	Éclairage haut et bas	Emisión superior e inferior	Luce biemissione sopra/sotto
A - G	Energy labelling regulation	Verordnung über die Energiekennzeichnung	Energielabel	Règlement sur l'étiquetage énergétique	Reglamento sobre el etiquetado energético	Regolamento sull' etichettatura energetica
	Light source replaceable by end user	Lichtquelle durch Endverbraucher austauschbar	Lichtbron vervangbaar door eindgebruiker	Source lumineuse remplaçable par l'utilisateur final	Fuente luminosa sustituible por el usuario	Sorgente luminosa sostituibile dall'utente finale
	Light source not replaceable	Lichtquelle nicht austauschbar	Lichtbron niet vervangbaar	Source lumineuse non remplaçable	Fuente luminosa no sustituible	Sorgente luminosa non sostituibile
	Control gear replaceable by end user	Betriebsgerät durch Endverbraucher austauschbar	Driver vervangbaar door eindgebruiker	Dispositif de commande remplaçable par l'utilisateur final	Mecanismo de control sustituible por el usuario	Dispositivo di controllo sostituibile dall'utente finale
	Control gear not replaceable	Betriebsgerät nicht austauschbar	Driver niet vervangbaar	Dispositif de commande non remplaçable	Mecanismo de control no sustituible	Dispositivo di controllo non sostituibile
	Light source replaceable by authorized professional	Lichtquelle durch autorisierte Fachleute austauschbar	Lichtbron vervangbaar door een erkend vakman	Source lumineuse remplaçable par un professionnel agréé	Fuente luminosa sustituible por un técnico autorizado	Sorgente luminosa sostituibile da tecnici specializzati
	Control gear replaceable by authorized professional	Betriebsgerät durch autorisierte Fachleute austauschbar	Driver vervangbaar door een erkend vakman	Dispositif de commande remplaçable par un professionnel agréé	Mecanismo de controls ustituible por un técnico autorizado	Dispositivo di controllo sostituibile da tecnici specializzati

contact

HEAD OFFICE + SHOWROOM

WEVER & DUCRÉ BV
Spinnerijstraat 99/21
8500 Kortrijk, Belgium
Phone +32 56 492 800
office@weverducre.com
weverducre.com

SHOWROOMS

AUSTRIA
Dokter-Hermann-Thurner-Straße 3 / Top 17
4060 Leonding
Phone +43 316 3170 8570
office.at@weverducre.com

Gleisdorfer Gasse 15
8010 Graz
Phone +43 316 317 085 91
office.at@weverducre.com

Marxergasse 1B
1030 Vienna
Phone +43 1 526 47 84
office.at@weverducre.com

BELGIUM
Gare Maritime
Picardstraat 7
bus 304
1000 Brussels
Phone +32 56 492 800
office@weverducre.com

FINLAND
Sörnäistenkatu 1
00580 Helsinki
Phone +358 50 348 4366
office.fi@weverducre.com

FRANCE
36, Rue Juliette Récamier
69006 Lyon
Phone +33 4 72811199
office.fr@weverducre.com

10, Rue Pecquay
75004 Paris
Phone +33 1 402 981 01
office.fr@weverducre.com

GERMANY
Europa-Allee 18
60327 Frankfurt am Main
Phone +49 69 21029590
office.de@weverducre.com

Helmholtzstraße 2
10587 Berlin
Phone +49 30 39743290
office.de@weverducre.com

Schanzenstraße 36, Geb. 234B
51063 Cologne
Phone +49 221 130649 60
office.de@weverducre.com

Ruhrstraße 11A / Im Phoenixhof
22761 Hamburg
Phone +49 40 85179283 0
office.de@weverducre.com

Maybachstraße 10b
70469 Stuttgart
Phone +49 711 806075 90
office.de@weverducre.com

HONG KONG
RM. 1413, Block A, Sea View Estate
2 Watson Road North Point, Hong Kong
Phone +852 211 069 24
office.hk@weverducre.com
office.cn@weverducre.com

ITALY
Via Monte Popera 4/2
30027 San Donà di Piave - Venezia
Phone +39 0421 177 83 88
office.it@weverducre.com

NETHERLANDS
Design Post Amsterdam
Cruquiusweg 111L, 1019 AG Amsterdam
Phone +31 20 229 6001
info.nl@weverducre.com

POLAND
ul. Komitetu Obrony Robotników 70,
02-146 Warsaw
Phone +48 730 330 358
office.pl@weverducre.com

SPAIN
Plaça Duc de Medinaceli 5
08002 Barcelona
Phone +34 93 5112 189
office.es@weverducre.com

SWEDEN
Norrtullsgatan 12N
11327 Stockholm
Phone +46 10 440 71 10
office.se@weverducre.com

SWITZERLAND
Sonnmatthof 3
6023 Rothenburg
Phone +41 41 361 60 60
office.ch@weverducre.com

UK
477b-478 Batemans Row
London, EC2A 3HH
Phone +44 203 174 01 77
info.uk@weverducre.com

REPRESENTATIVE OFFICES

INDIA
1524, Astralis, Supernova, Sector-94
201301, Noida, Uttar Pradesh
Phone +918377006926
office.in@weverducre.com

NORWAY
Drammensveien 130, Inng. B12
0277 Oslo
Phone +47 24 07 61 11
office.no@weverducre.com

UAE
Office No. 704, HDS Business Center
Cluster M, Jumeirah Lakes Towers, DMCC
PO Box 336603 Dubai
United Arab Emirates
Phone +971 4 436 23 47
office.me@weverducre.com

©WEVER & DUCRÉ® BV

1ST EDITION, MARCH 2026

All prices are non-binding recommended prices excluding VAT, lamps (bulbs) are not included. The prices and terms of payment stated in our order confirmation shall apply. To all prices and all extra expenses, we add the legally applicable value added taxes. Should our costs increase by the time of delivery, the prices can be recalculated on a pro rata basis. The prices stated shall apply net ex works. Information on availability as well as delivery terms and dates are provided as a point of reference only and are not binding. Prices are valid till the publication of a new price list. Please note: The printed prices reflect the pricing at the time of catalogue publication. For the most up-to-date pricing, please refer to our website. We expressively reserve the right to make changes in price, measurements and design. The details provided in this catalogue were correct at the time of publication. They do not constitute any kind of obligation on our part and are for information only. We shall not be held liable for any discrepancies between the illustrations or descriptions given and the actual product neither for any misprints and/or typing errors. We reserve the right to make alterations or modifications to our products at any time. All mentioned RAL codes are indicative and approximative. We shall not be held liable for any discrepancies which may occur. All mentioned wattage, lumen, beam angles, lifetime and SDCM values refer to white luminaires (in terms of finishing, covers or housings) in 3000K. Further values on request. The general terms and conditions of Wever & Ducré BV shall apply to all purchases and orders. The applicable version of the general terms and conditions can be viewed at weverducre.com/en/downloads.

What's that? A whole new product range, and already several project references? See it this way: Inspiration is key to success in design, so what we care for most is inspiring you and showing you the potential of what we at Wever & Ducré do. Thus, we took the liberty of editing some (original) images to give you an impression of how our luminaires improve living, office, outdoor, and other spaces. These pictures are marked with (V)

COVER	Frederik Vercruysse
GRAPHIC DESIGN	Carola Friedrich, Carina Erlach
PRINT PRODUCTION	Carola Friedrich, René Zavadilik
ILLUSTRATION	Carina Erlach, Lukas Hochenwarter
TEXT	Tanja Petschnig
LITHOGRAPHY	Volker Waldhauser
PROJECT MANAGEMENT	Carola Friedrich, Melanie Löffler, Victoria Prath
PRINTING	Drukarnia Perfekt S.A., Warsaw, Poland
VISUALIZATIONS	Animotions - Visuals for brands, Nanopixel bv, Outlier Creative, P1 Studio
PHOTOGRAPHY	Adrian Beck (546), Aikon-Producties-bvba (236), Aleksandr Dal Cero (250), Álvaro Valdecantos (724), Amaury Laparra (204, 252), Andrea Badrutt Fotografie (302), Andrei Valeriu Radulescu (242), Anker & Co (36, 234), Annelien Geenen (510), Annelies Degroote (216, 222, 696), Arnold Ory (98), Axis71 (14, 16), Barbara Corsico (554), Bart Gosselin Photography (118, 166, 192, 298, 340, 662), Beeldcollectief l Lucas Despriet (21), Benoit Ravier-Bollard (282), Bert Demasure (420), Bob Reijnders (342), Camille Huguenot (74), Caroline Dethier (812), Catherine Roider (394), Charlotte Kap Interieurfotografie (230), Chiela van Meerwijk (126, 324, 570), Chris Snook (80), Christian Brandstätter (784), Christoph Hütter Photography (30), Christoph Platzer (654), Christoph Steinbauer (368, 578, 748, 754, 816), Corinna Unterkofler (828, 862), Cornelia Kindsvater (442, 443), Daniel Stauch (328), Dieter Vyvey (272), Elia Kuhn Photographe (120), Elien Jansen (224), Elodie Dugué Photographe (598), Elodie Winter Photography (600), Elsa Young (580), Emanuel Waldmann (136), Empower Spaces (656), Erich Sinzinger, 2019 (858), Erik Đuriš (626, 627), Evgenij Avramenko (610), Fabrizio Carraro (418, 419, 658, 659), Federico Covre – Architectural Photographer (407), Flare Department (78, 130), Florian Zenk (36, 446, 447), French Village (584), Gerald Van Rafelghem (842), Gerard Colomé (92, 194, 195, 416, 814, 834, 844), Gianni Declercq Photography (588), Giovanni Nardi (278, 280), Gonzalo Botet (264), Gregor Titze (636), Hanne Joosen Fotografie (164, 244), Hannes Otte (25, 36, 260, 514, 808), Ilaria Sgambaro from Interni 21.11 (392), In-Between Architects Limited (688), Ingo Rasp Photography (574), Jacek Rokowski (674), Jakob Kotzmuth (794, 795), Jan Kan (714), Jean Pellaprat de VISIBLE (524), Joachim De Rous (102), Joachim Grothus (180, 228), Joachim Grubelnik (828, 862), Johan Méallier (594), Julien Pépy (46), Jurrit van der Waal – The Art of Living magazine (606), Karsten Knocke (734), Kim Donggyu (444), Kris Dekeijser (17, 25, 35, 49, 60, 82, 84, 90, 106, 152, 156, 160, 208, 212, 238, 240, 246, 248, 262, 276, 288, 300, 304, 320, 332, 334, 348, 349, 364, 366, 376, 408, 464, 480, 482, 484, 498, 522, 532, 536, 550, 558, 559, 604, 624, 628, 638 632, 634, 702, 718, 730, 742, 756, 758, 764, 768, 780, 786, 800, 802, 810, 826, 838, 848, 850, 860, 861, 864, 872, 880), Kris Dimitriadis/Kurt Dekeyzer studio PSG 2021 (618), Kristof Claeys (172), Kurt Kuball (762, 796), Lennart Wiedermuth (25, 538), Lenzer (380), Local Minded (378), Lukas Jahn (782), Lukas Vazan (18), Lumine Fotografie (518), M. Leimgruber (29), Margriet Hoekstra (254, 820), Marta D'Avenia Photography (608), Marta Vidal (96, 410, 576), Martin Grobe (642), Max Feldhoff (542), Maxi Conesa (202), Melvin wong weije (806), Mgr. art. Matej Hakár (560), Michaël Radi (596, 597), Miikka Leskinen (572, 682), Miloš Martinović (154), Miriam Raneburger (766), Namsun Lee (218), Niels Nygaard (460), Nikolaus Pfusterschmid (752), nomadic..den (494), Norbert Tukaj (740, 840), nunofoto (804), Open Architectes (876), Oracle – Clément Gerard (676), Paloma Pacheco Turnes (664, 665), Patricia Goijens (496), Paul Ott (516, 564, 565), Peter Baas Photography (108, 256), Peter Margis (388), Petri Immonen (220), Philip Kottlorz Fotografie (292, 296, 372, 640), Pilar Shoots (66, 182, 490), PO Photo (146), Pol Viladoms (646), Pro Urban AG (466), Quy Bui - Wuyhoang Studio (478, 653, 890, 891), Radoje Burzan photography (76), renaatnijs (36), Rupert Asanger (540), Salva López (138), Sandra Mulder (14, 19), Sebastian Reiser (468, 469, 684, 886, 888), Sergio Camplone (544), Søren Kristensen (162), Steenoven (186), Stefano Maniero (692), Stella Kager (9, 13, 26, 30, 35, 38, 644), Stéphanie Mathias (51, 354, 355), Stevie Campbell (672), Stijn Poelstra (614), Stijn Vereeken (132), Studio Blenda (424, 425), Studio Erick Saillet (128), Studio Fo.cus (62), Studio Gataric Fotografie (704), Studio05 (652), Sue Baer (488), Supereal (206), Tijs Vervecken (142), Tom Bremer (322, 346, 612), Tom Lierman photography (352), Trien Byttebier (150, 548), Type Type Hype (37), Uliana Grishina (666), Unique Renovations (650), Victor Chito (86, 832), Victor Sajara Photography (856), Vlad Cioplea (556), Yves Garneau (112), Zvonimir Mihaljek (798)

FSC
www.fsc.org
MIX
Paper from responsible sources
FSC® C016890

WITH GROUPED PRODUCT FAMILIES

index by name

1-PHASE TRACKS 361
3-PHASE TRACKS 385
BENTO 621
BLAS CEILING SURFACE 767
BLAS WALL SURFACE 827
BLIEK 67
BLIEK PETIT CEILING RECESSED 63
BLIEK PETIT CEILING SURFACE 179
BLINK 839

BOX

BOX CEILING SURFACE 235
BOX CEILING SURFACE EXTERIOR 765
BOX ON STREX 335
BOX WALL SURFACE 607
BOX WALL SURFACE EXTERIOR 815
BOX MINI CEILING SURFACE 231
BOX MINI WALL SURFACE 605

CARD 843

CENO

CENO CEILING RECESSED 131
CENO CEILING SURFACE 181
CENO ON STREX 321
CENO WALL SURFACE 585

CENTRAL 617
CENTRAL EXTERIOR 809
CG01 719
CG SQUARE 647
CHART 851
CHART ASYM 853
CITY IP44 173
CLASCO 791

CLEA

CLEA CEILING SURFACE 287
CLEA CEILING SUSPENDED 557
CLEA WALL SURFACE 631

CONE 463
COZY CONE CEILING SUSPENDED 503
COZY CONE ON STREX 345
DARF CEILING SUSPENDED 445
DARF WALL SURFACE 643

DEEP

DEEP 107
DEEP EXTERIOR 745
DEEP IP65 | IP44 161
DEEP ADJUST 119
DEEP ADJUST IQ 115
DEEP ADJUST PETIT 113
DEEP ADJUST PETIT IQ 111
DEEP ADJUST PETIT TRIMLESS 113
DEEP ADJUST TRIMLESS 117
DEEP BIJOU 99
DEEP BIJOU EXTERIOR 741
DEEP BIJOU IP65 157
DEEP IQ 105
DEEP PETIT 103
DEEP PETIT EXTERIOR 743
DEEP PETIT IP65 159
DEEP PETIT IQ 101
DEEP POINT 97
DEEP POINT IP44 155
DEEPER 109
DEEPER IP44 163

DINOR 563

DOCUS

DOCUS CEILING SURFACE 241
DOCUS ON STREX 337
DOCUS MINI CEILING SURFACE 239
DOCUS MINI WALL SURFACE 609

DOMINO 693
DOMY ON STREX 327
DOT 649

DRO

DRO CEILING SURFACE 279
DRO CEILING SUSPENDED 465
DRO FLOOR SURFACE 731
DRO ON 1-PHASE TRACK 373
DRO TABLE 717
DRO TABLE | FLOOR SURFACE 715
DRO WALL SURFACE 623

ELLO SYSTEM 405

FIL

FIL CEILING SUSPENDED 441
FIL SPIN CEILING SURFACE 267
FIL SPIN WALL SURFACE 681

FINELLE CEILING SUSPENDED 423
FLYRA CEILING SUSPENDED 427
FLYRA SYSTEM 401

FINLIN

FINLIN CEILING SURFACE 263
FINLIN CEILING SUSPENDED 433
FINLIN FLOOR SURFACE 727
FINLIN WALL SURFACE 673
FINLIN ROUND 679

GATE CARRÉ FLOOR SURFACE 871
GATE ROUND FLOOR SURFACE 869
GEO FLOOR SURFACE 885
GIGANT 461
HAJO IP44 697

HEXO

HEXO CEILING SURFACE 245
HEXO CEILING SUSPENDED 533
HEXO ON 1-PHASE TRACK 377
HEXO ON 3-PHASE TRACK 393
HEXO ON STREX 339
HEXO MINI CEILING SURFACE 243
HEXO MINI CEILING SUSPENDED HV 531
HEXO MINI CEILING SUSPENDED LV 505
HEXO MINI ON 1-PHASE TRACK 375
HEXO MINI ON 3-PHASE TRACK 391
HEXO MINI WALL SURFACE 611

ILANE 409
INTRA 749

J.J.W.

J.J.W. CEILING SURFACE 289
J.J.W. CEILING SUSPENDED 479
J.J.W. WALL SURFACE 633

KIOSK FLOOR SURFACE EXTERIOR 857
KIOSK WALL SURFACE 793
KUJO CEILING SUSPENDED 453
LARRA 671

LECA

LECA CEILING RECESSED 135
LECA CEILING SURFACE 189
LECA ON STREX 325
LECA SNOOZE 569

LEENS 619
LIKO ON 3-PHASE TRACK 387
LINOO CEILING RECESSED 71
LINOO CEILING SURFACE 211
LINUS 881
LITO 575
MAP 845
MAP ASYM 849

MATCH

MATCH CEILING RECESSED 137
MATCH CEILING SURFACE 193
MATCH CEILING SUSPENDED 509
MATCH ON STREX 329
MATCH SUSPENDED ON STREX 347
MATCH FLOOR SURFACE 729
MATCH TABLE 723
MATCH WALL SURFACE 589
MATCH LUSTA 415
MATCH SNEAK 143
MATCH SNOOZE WALL RECESSED 571
MATCH SNOOZE WALL SURFACE 685
MATCH STICK 145
MATCH POINT 61
MATCH POINT IP44 153

MICK

MICK CEILING SURFACE 199
MICK ON STREX 333
MICK WALL SURFACE 691
MICK SNOOZE 687

MILES 669
MILES CARRÉ 667
MILES ROUND 663
MIRBA IP44 705

MIRBI

MIRBI IP44 CEILING RECESSED 171
MIRBI IP44 CEILING SURFACE 297
MIRBI LONG IP44 707

MIRRO

MIRRO CEILING SURFACE 283
MIRRO CEILING SUSPENDED 467
MIRRO FLOOR SURFACE 733
MIRRO TABLE 721
MIRRO WALL SURFACE 625

HV HIGH VOLTAGE | **LV** LOW VOLTAGE

More product families on next page

WITH GROUPED PRODUCT FAMILIES

index by *name*

MIRRO SOFT CEILING SURFACE 285
MIRRO SOFT CEILING SUSPENDED 471
MIRRO SOFT WALL SURFACE 629

NET 421

ODREY

ODREY CEILING SUSPENDED HV 539
ODREY CEILING SUSPENDED LV 517
ODREY ON 1-PHASE TRACK 379
ODREY ON STREX 353
ODREY WALL SURFACE 599

OPLIA CEILING SUSPENDED 521
OPLIA ON STREX 357
OPLIA CHANDELIER 457
ORIS 581
ORIS EXTERIOR 785
PALOS WALL SURFACE EXTERIOR 819
PALOS CARRÉ FLOOR SURFACE EXTERIOR 877
PALOS ROUND FLOOR SURFACE EXTERIOR 873
PAVIO IP65 711
PAVIO EXTERIOR 831

PERLEZ

PERLEZ IP44 CEILING RECESSED 169
PERLEZ IP44 CEILING SURFACE 295
PERLEZ IP44 WALL SURFACE 701
PERLEZ CLIP IP44 703
PERLEZ GRID 275
PERLEZ SPIN 271

PIRRO

PIRRO CEILING RECESSED 77
PIRRO CEILING SURFACE 215
PIRRO ON 1-PHASE TRACK 371
PIRRO ON BASE 223
PIRRO OPAL 221
PIRRO PETIT CEILING RECESSED 75
PIRRO PETIT CEILING SURFACE 213

PILLO CEILING SURFACE 201
PILLO ON 1-PHASE TRACK 363
PLANO CEILING RECESSED 85
PLANO IP44 CEILING RECESSED 151
PLANO PETIT CEILING RECESSED 83
PLANO PETIT CEILING SURFACE 227
POLA 889
QUBBY CEILING SUSPENDED 459
QUBBY SYSTEM 397
QITO CEILING RECESSED 57
QITO CEILING SURFACE 177

RAY

RAY CEILING SURFACE 251
RAY CEILING SURFACE EXTERIOR 759
RAY CEILING SUSPENDED 537
RAY ON 1-PHASE TRACK 377
RAY ON 3-PHASE TRACK 393
RAY ON STREX 341
RAY WALL SURFACE 615
RAY WALL SURFACE EXTERIOR 805
RAY MINI CEILING SURFACE 247
RAY MINI CEILING SUSPENDED HV 535
RAY MINI CEILING SUSPENDED LV 507
RAY MINI ON 1-PHASE TRACK 375
RAY MINI ON 3-PHASE TRACK 391
RAY MINI WALL SURFACE 613

REED 887

RETO

RETO WALL RECESSED 573
RETO WALL RECESSED EXTERIOR 781
RETO WALL SURFACE EXTERIOR 835
RETO ROUND 833

RIBELLE FLOOR SURFACE 867
RIBELLE IP65 WALL SURFACE 709
RIBELLE WALL SURFACE EXTERIOR 825
RINI SNEAK IP44 167
ROB IP44 301
ROB EXTERIOR 769
ROBY IP44 303
RONY ADJUST 129
RONY ADJUST PETIT 127
RONY PETIT 125
RONY POINT 123

ROOMOR

ROOMOR CEILING SUSPENDED 495
ROOMOR FLOOR SURFACE 735
ROOMOR TABLE 725
ROOMOR WALL SURFACE 639
ROOMOR OFFICE CEILING SURFACE 293
ROOMOR OFFICE CABLE SUSPENDED 499
ROOMOR OFFICE ON 3-PHASE TRACK 395

ROSS IP54 307
ROSS EXTERIOR 771
RUVI CEILING RECESSED 147
RUVI ON 1-PHASE TRACK 383

SARA

SARA ON BASE 203
SARA ON 1-PHASE TRACK 365
SARA SNOOZE 689

SCAVA 695
SHEDDA 449
SHEDDA FRACTAL 451
SHIEK 561
SIRRO 229
SNEAK 93
SNEAK TRIMLESS 91
SOLID 257
SOLID BIJOU 253
SOLID PETIT 255
SOLLI CEILING SUSPENDED 523
SOLLI ON STREX 359
SOLLI COCOON 525
SPIRRA SOFT 475
SQUBE ON BASE 205
SQUBE ON 1-PHASE TRACK 369
SQUBE ON 3-PHASE TRACK 389
STIPO 863
STUDO 437
STRANGE TRIMLESS 89
STRANGE PETIT TRIMLESS 87
STREX DOT MODULE 343
STREX OPAL MODULE 343
STREX SYSTEM | 48V 313
STRIPE 579
STRIPE SLIM 577
SWAM FLOOR SURFACE 859
SWAM WALL SURFACE 821

TAIO

TAIO CEILING RECESSED EXTERIOR 747
TAIO CEILING SURFACE EXTERIOR 757
TAIO IP65 CEILING RECESSED 165
TAIO IP65 CEILING SURFACE 299
TAIO WALL SURFACE EXTERIOR 803

TAPE 817
TAPIS 651
TAPIS SOFT 657
TOWNA IP44 305

TRADORA

TRADORA CEILING SURFACE 775
TRADORA CEILING SUSPENDED 777
TRADORA WALL SURFACE 823

TRACE

TRACE CEILING SURFACE 261
TRACE CEILING SUSPENDED HV 547
TRACE CEILING SUSPENDED LV 511
TRACE ON STREX 351
TRACE WALL SURFACE 593
TRACE CHANDELIER 417
TRACE GRID 273
TRACE MINI ON STREX 331
TRACE MINI WALL SURFACE 591
TRACE SLIM 595
TRACE SPIN 269

TRAIN CEILING SURFACE 761
TRAIN WALL SURFACE 807
TRAM CEILING SURFACE 753
TRAM WALL SURFACE 797
TUBE CEILING SURFACE 755
TUBE WALL SURFACE 799
TUBE CARRÉ CEILING SURFACE 763
TUBE CARRÉ WALL SURFACE 811
VENN CEILING SURFACE 277
VENN WALL SURFACE 683
WAVE SOFT 477
WETRO 549
WIRO CEILING SURFACE 291
WIRO CEILING SUSPENDED 489
WIRO CONE 489
WIRO DIAMOND 493
X-BEAM FLOOR PROJECTOR 865
X-BEAM WALL SURFACE 829

HV HIGH VOLTAGE | **LV** LOW VOLTAGE

COLOURS AND MATERIALS

For specific information on colours and finishes please refer to weverducre.com/materials

Depending on the product and application, the materialization may differ: For more informations on materials, finishes, structures, RAL and NCS colour codes, please check our product page on the website. RAL and NCS colour codes are always approximate and can be checked by the customer based on samples.

Outdoor

METAL

- W White
- D Grey
- A Anthracite Grey
- Q Bronze
- G Gold
- B Black
- K Black and Gold

- CL Classic Alu
- CQ Classic Bronze
- AB Antique Brass

- I Inox | 304 Stainless steel electro polished

RECYCLED PET FELT

- WF White
- MF Marble Grey
- LF Limestone
- OF Oxide Red
- IF Indigo Blue
- AF Anthracite
- F Grey

ALUMINIUM COMPOSITE MATERIAL

- GB Black and Light Gold
- NB Black and Black Chrome
- LB Black and Glossy Aluminium

MARBLE

- MB Black
- MW White

Indoor

GLASS HANDBLOWN

- TS Smoked Striped
- TW Taupe White
- DW Dark Taupe White
- TD Smoked Diamond
- YD Yellow Diamond
- GD Green Diamond
- BD Blue Diamond
- FD Frosted Diamond | Opal
- P Copper Plated
- B Smoked
- W White | Opal

HAJO GLASS

- C Clear
- W Sandblasted
- A Amber
- B Smoked

METAL

- E White and Black
- J White and Gold
- H Champagne and Black
- K Black and Gold
- CH Black and Champagne
- Z Black and Copper
- GW Cement Grey and White
- RR Coral Red and White

OTHERS

- W White | LLDPE

3D PRINTED MATERIAL (IQ)

- RP Recycled PET
- W White ASA
- B Black ASA
- SG Silk grey ASA

METAL

- LS Live Simple
- SG Silk Grey
- FJ Feel Jade
- CC Come Closer
- ME Mother Earth

- YE Yellow CG01
- RE Red CG01
- AU Aubergine CG01
- BE Blue CG01
- B Black CG01

PLASTER

- GW Give Warmth
- ST Stay Together
- FJ Feel Jade
- RA Raw material for custom paint

METAL

- W White
- L Aluminium
- G Gold
- M Champagne
- Q Bronze
- P Copper
- V Corton steel look
- GM Gun metal
- B Black

- A Anodised Aluminium
- T Tumbled Aluminium

LINE BRUSHED FINISH FOR METAL COLOURS

- Line brushed

